

Crimp-Validation

product: DELPHI PN 15414439

material: CUNI3SI1MG

surface: AU

material thickness: 0,25 mm

cross section [mm²]: 1,5 | 2,0

strip length: 4,00 mm

cable type: T3ZHID

insulation ø [mm]: 2,10 - 2,50

seal:

**Uncontrolled
Copy
For Information only!**


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,05	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
T3ZHID	1,5	19 x 0,32	2,20	200	1,55	2,40	2,50	3,00		
T3ZHID	2,0	37 x 0,25	2,40	230	1,65	2,45	2,60	3,00		

core:
C-2.30-3.0-10
DPN 10713719


insulation:
IS-3.00-3.0-12
DPN 10713804

anvil:

two piece anvil:
AC-2.30-3.25
DPN 10764230
AI-3.00-3.2-0.4
DPN 10764200

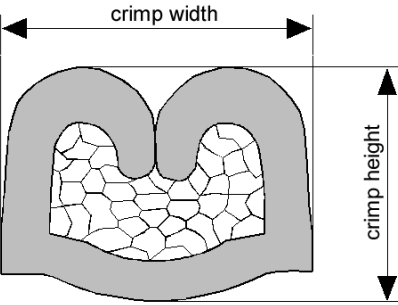


DELPHI PN 15414439

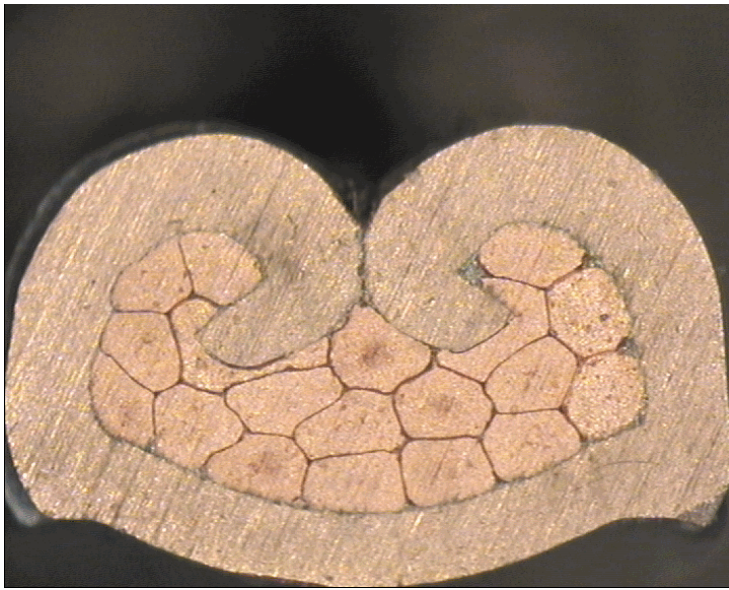

cable:
1,50 mm² = 19 x 0,32 mm

crimp height:
1,55 mm

crimp width:
2,40 mm

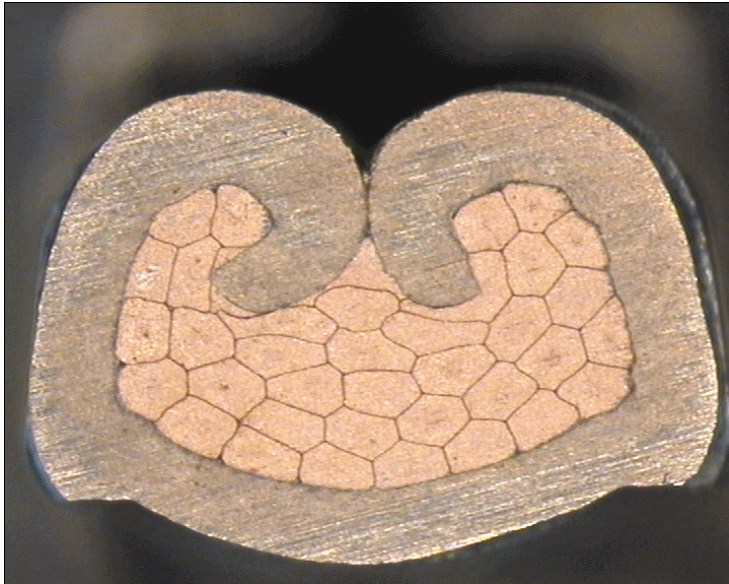

cable:
2,00 mm² = 37 x 0,25 mm

crimp height:
1,65 mm

crimp width:
2,45 mm