

B ATTENUATORS

SMA, up to 18 GHz, 2 Watts




SPECIFICATIONS:

Models: B

RoHS
Compliant

Electrical:
Frequency Range _____ DC - 18.0 GHz
Standard Freq. Values _____ 2.5, 6, 12.4, & 18 GHz
Standard dB Values* _____ 0 - 10, 12, 15, 20, 30, 40, 50, & 60 dB
In 1 dB Increments
Attenuation Accuracy
0 - 6 dB _____ ±0.3 dB
7 - 10, 12, 15 & 20 dB _____ ±0.5 dB
30 dB _____ ±0.75 dB
40, 50 & 60 dB _____ ±1.50 dB
VSWR
DC - 4 GHz _____ 1.15:1 Max.
4 - 8 GHz _____ 1.20:1 Max.
8 - 12.4 GHz _____ 1.25:1 Max.
12.4 - 18 GHz _____ 1.35:1 Max.
Input Power _____ 2 Watts Avg. @ 25°C
Derated Linearly to 0.5 Watts @ +125°C
Peak Power _____ 250 Watts Max.
(5uSec Pulse, .05% Duty Cycle)
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +125°C
Mechanical:
SMA Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper

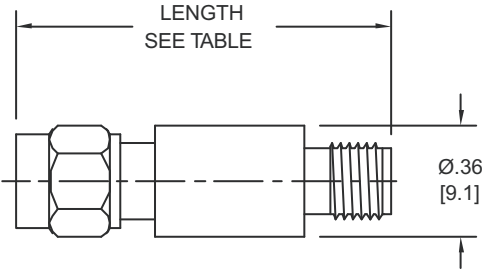

Connector Configuration	LENGTH			
	0 - 30 & 40 dB		31- 60 dB (except 40dB)	
	Inches	Millimeters	Inches	Millimeters
Male/Female	1.21 ±.03	[30.7 ±0.8]	1.49 ±.03	[37.8 ±0.8]
Male/Male	1.33 ±.03	[33.8 ±0.8]	1.62 ±.03	[41.1 ±0.8]
Female/Female	1.06 ±.03	[26.9 ±0.8]	1.35 ±.03	[34.3 ±0.8]

HOW TO ORDER:

Model Number: **XXB-XXY**

Freq. Range _____
6 = DC - 6 GHz
12 = DC - 12.4 GHz
18 = DC - 18 GHz

Connector Configuration
= Male/Female
F = Fem/Fem
M = Male/Male

dB Value

Ordering Examples:

- Model Number: **18B-20**
DC - 18 GHz; 20 dB; SMA - Male/Fem
- Model Number: **12B-6F**
DC - 12.4 GHz; 6 dB; SMA - Fem/Fem
- Model Number: **6B-3M**
DC - 6 GHz; 3 dB; SMA - Male/Male

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

18B-ATT: REV K



Aeroflex / Inmet, Inc. 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com