This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Tru-Connector Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Tru-Connector Corporation.

1	REV	DESCRIPTION	DATE	APPROVAL
	/	ORIGINAL ISSUE	1/27/87	RMK
	Α	CHANGED PER ECO 2247	8/7/03	AM

ENGINEERING DATA

ELECTRICAL

IMPEDANCE: 50 OHMS NOMINAL VOLTAGE RATING: 1,500 VOLTSRMS

MECHANICAL

INTERFACE PER MIL-C-3643

ENVIRONMENTAL

-65°C TO 165°C

MATERIALS

INSULATOR: TEFLON

GASKET: SILICONE RUBBER


CONTACT/CONTACT FINGERS: BeCu

OTHER METAL PARTS: BRASS

FINISH

CONTACT: SILVER PLATED

OTHER METAL PARTS: NICKEL PLATED

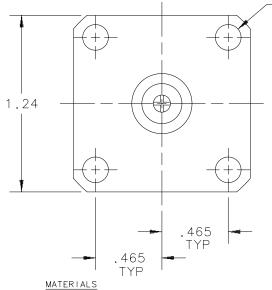

INSULATOR: TEFLON


GASKET: SILICONE RUBBER CONTACT/CONTACT FINGERS: BeCu

OTHER METAL PARTS: BRASS

FINISH

CONTACT: SILVER PLATED

OTHER METAL PARTS: NICKEL PLATED

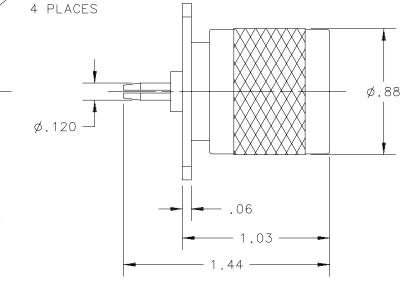

Ø.180 HOLE

