

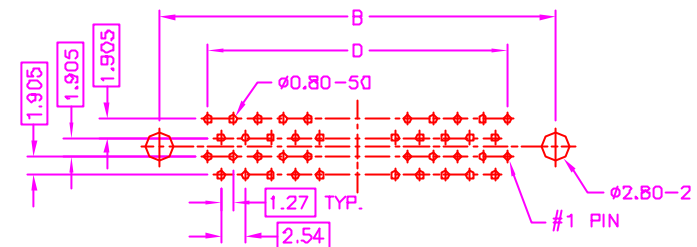
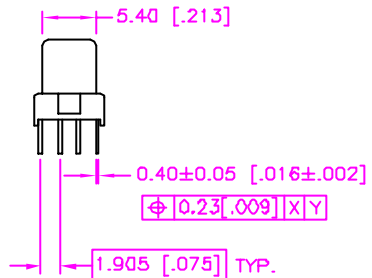


REV.	DESCRIPTION	DATE
—	RELEASE	May 1, 2000
1	MATERIAL MODIFY	Jun. 1, 2001
2		

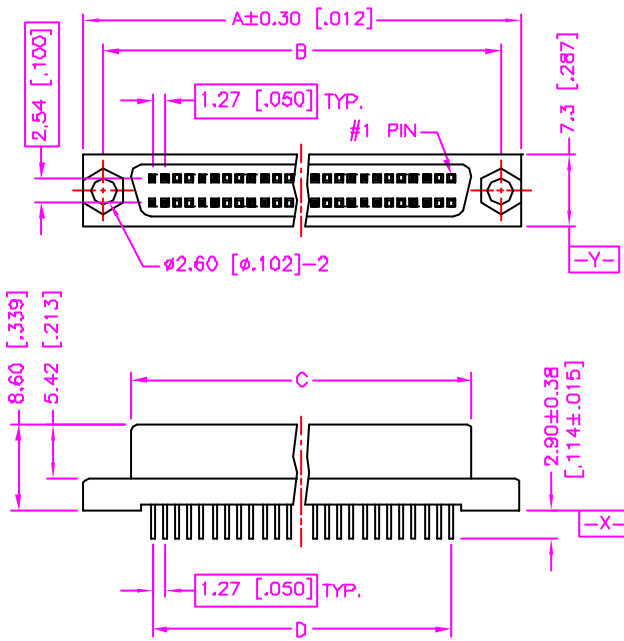

RECOMMEND P.C.B. LAYOUT (50 PINS)
BOTTOM VIEW

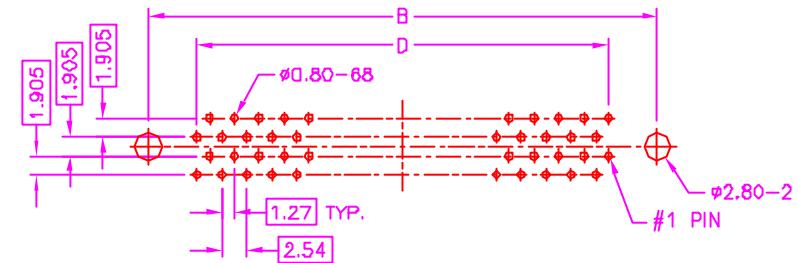

RECOMMEND P.C.B. LAYOUT (68 PINS)
BOTTOM VIEW


MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. DURABILITY : 500 CYCLES.

ORDER INFORMATION :

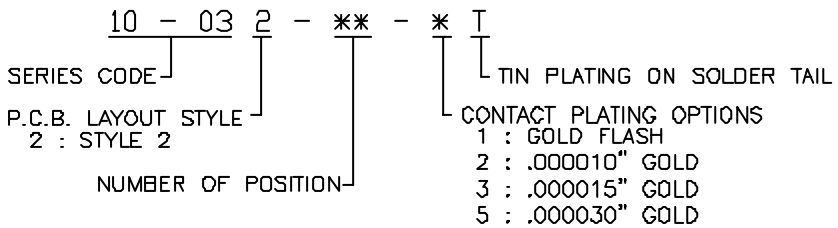

Number Of Position	DIMENSIONS			
	A	B	C	D
50	44.60[1.756]	40.40[1.591]	34.70[1.366]	30.48[1.200]
68	56.03[2.206]	51.83[2.041]	46.13[1.816]	41.91[1.650]

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>Katharin</i> CHECK <i>Jee</i> APP'D <i>Windy</i>	 Astron ASTRON TECHNOLOGY CORP. NAME SCSI SERIES PIN TYPE, STYLE 2, FEMALE, VERTICAL ALL PLASTIC WITH HEX EARS		
UNITS : mm [inch]	303-0022		DRAW NO. C451-0006	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B	09006