
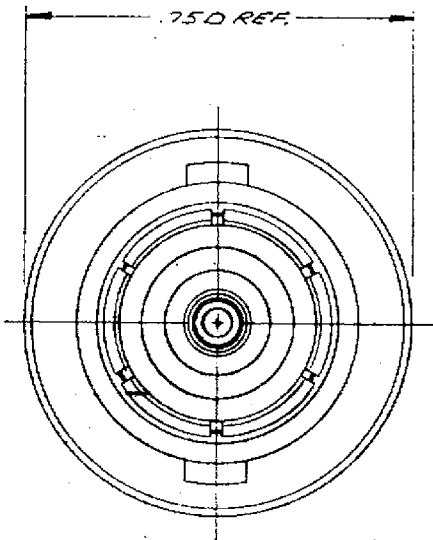


DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

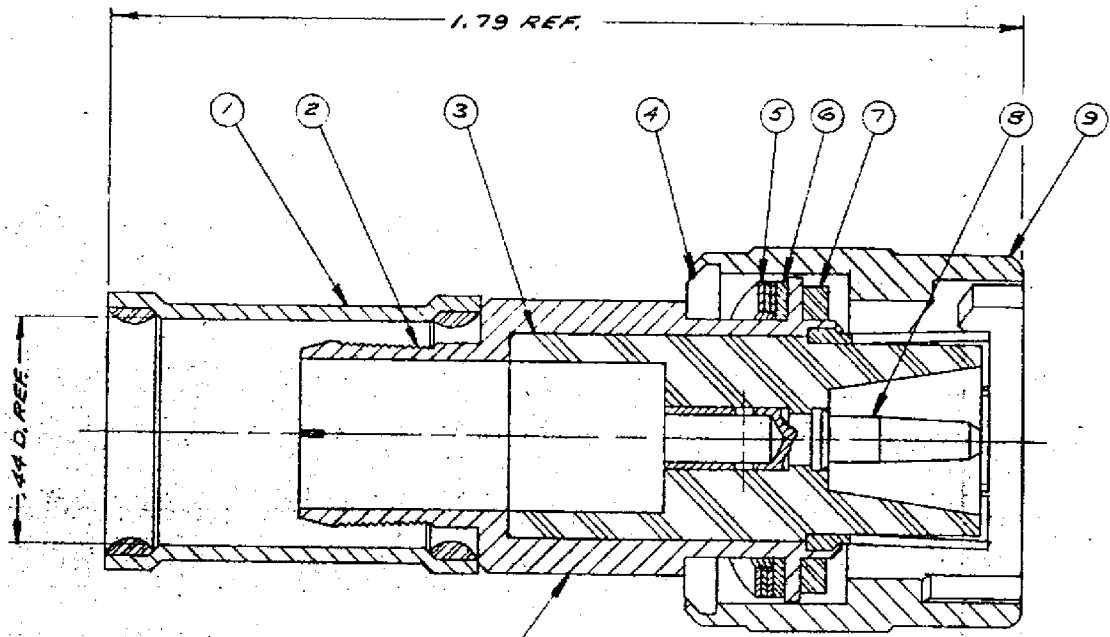

KD-59-165

REVISIONS	
ISSUE	CHANGE
0	ER 14826 MJB 12 SEP 75
1	CN 14998A JL 7 NOV 75
2	CN 15700C MJB 20 APR 76

NOTES:

1. FOR USE WITH RG-9B, 214/06 BA-6903 CABLE.
2. FOR CABLE TRIMMING USE KTJ-155 & KTD-137.
3. FOR FORMING USE CRIMP DIE SIZE 79.
4. FOR CABLING INSTRUCTIONS SEE CP 5404
5. ITEMS ①, ②, ④ & ⑨ TO HAVE TR-5 FINISH.

USED ON:
REF:
FINISH:
SPEC:
MATL:
SPEC:
HIGH VOLTAGE C PLUG
DRAWN MJB DATE 12 SEP 75
APPR. DATE 17 SEP 75

9	1	BAYONET SLEEVE	
8	1	CLAPTIVE CRIMP CONTACT M	1-856-9
7	1	GASKET	
6	1	WASHER	
5	3	SPRING WASHER	
4	2	HALF WASHER	
3	1	INSULATOR	
2	1	K-GRIP BODY ASS'Y	
1	1	W/P K-GRIP SLEEVE	N-59-140-G
ITEM	REQ'D	DESCRIPTION	PART NO.

UNLESS OTHERWISE SPECIFIED:

- | | |
|---|--|
| 1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
3 PLACE DECIMALS ± .004
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES. | 2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. |
| 3. NO FILLETS PERMITTED. | 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX. |
| 5. ALL DIMENSIONS PRIOR TO PLATING. | |

KINGS ELECTRONICS
40 MARLEDALE ROAD
TUCKAHOE, N. Y. 10707
KD-59-165

S-D