RED INDICATES ORIGINAL

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS					305-0137	SH 1C
REV	ECO	DESCRIPTION	DWN	APPROVED	DATE	
F	13357	ADDED -12-01 THRU -17-008, -A12-01 THRU -A17-008, -B12-01 THRU -B17-008 AND ITEM 16 TO BOM FOR SST WITH D-LUG 9-3265-1; UPGRADE TO LARGER FORMAT, UPGRADE TABLE 1 AND 2; ADDED VIEW FOR SST ROPE & D-LUG; CHANGED NOTE 4; .56 ±.03 WAS .560 ±.030; GENERAL UPDATE; SEE ECO	OKC		4/14/00	

TABLE 1	
DASH NO	DESCRIPTION
-1	CAP (NO CHAIN)
-2	CAP WITH 2.5 BRASS CHAIN
-3	CAP WITH 2.5 NYLON CHAIN
-4	CAP WITH 3.0 BRASS CHAIN
-5	CAP WITH 3.0 NYLON CHAIN
-6	CAP WITH 6.0 BRASS CHAIN
-7	CAP WITH 6.0 NYLON CHAIN
-8	CAP WITH 4.0 BRASS CHAIN
-9	CAP WITH 4.0 NYLON CHAIN
-10	CAP WITH 10.0 BRASS CHAIN
-11	CAP WITH 10.0 NYLON CHAIN
-12	CAP WITH 2.5 INCH SST ROPE
-13	CAP WITH 3.0 INCH SST ROPE
-14	CAP WITH 6.0 INCH SST ROPE
-15	CAP WITH 4.0 INCH SST ROPE
-16	CAP WITH 7.0 INCH SST ROPE
-17	CAP WITH 4.5 INCH SST ROPE

TABLE 2	
MODEL NO	TYPE
RFI85	2-LUG
RFI853	3-LUG
RFI385	THREAD

TABLE 3				
DASH NO	"A" DIA	"B" DIA	"C" DIM	"D" DIM
-01	0.755	0.875	1.191	0.513
-02	0.630	0.750	1.066	0.450
-03	0.505	0.625	0.941	0.388
-04	0.439	0.562	0.878	0.356
-05	0.380	0.500	0.816	0.325
-06	0.317	0.437	0.753	0.294
-07	0.281	0.406	0.722	0.278
-08	0.610	0.750	1.066	0.450
-09	0.567	0.687	1.003	0.419
-010	0.192	0.312	0.628	0.231
-011	1.005	1.125	1.441	0.638
-008	0.330	0.450	0.766	0.300

INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM
.005	0.13	.278	7.06	.380	9.65	.56	14.22	.687	17.45	1.003	25.48	6.00	152.40
.010	0.25	.281	7.14	.388	9.86	.562	14.27	.722	18.34	1.005	25.53	7.00	177.80
.030	0.76	.290	7.37	.406	10.31	.567	14.40	.750	19.05	1.066	27.08	10.00	254.00
.032	0.81	.294	7.47	.419	10.64	.610	15.49	.755	19.18	1.125	28.58		
.062	1.57	.300	7.62	.437	11.10	.625	15.88	.766	19.46	1.191	30.25		
.140	3.56	.312	7.92	.439	11.15	.628	15.95	.816	20.73	1.441	36.60		
.192	4.88	.317	8.05	.450	11.43	.630	16.00	.835	21.21	2.50	63.50		
.200	5.08	.325	8.26	.500	12.70	.638	16.21	.875	22.23	3.00	76.20		
.231	5.87	.330	8.38	.505	12.83	.673	17.09	.878	22.30	4.00	101.60		
.25	6.35	.356	9.04	.513	13.03	.682	17.32	.941	23.90	4.50	114.30		



RFI385-1

SHOWN

NO CHAIN/ROPE
OR MOUNTING LUG

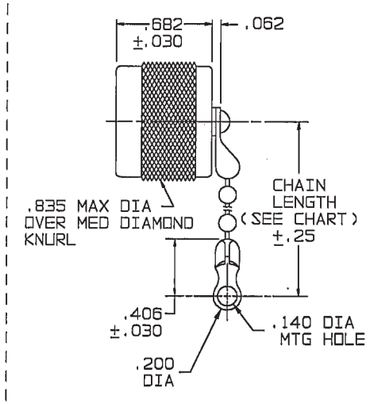

RFI385-2 THRU

-11 SHOWN

STANDARD CHAIN &
MOUNTING LUG

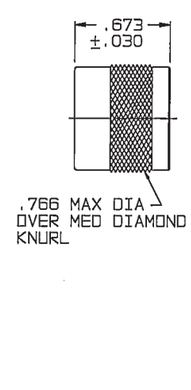

RFI85/

RFI853-1

SHOWN

NO CHAIN/ROPE
OR MOUNTING LUG

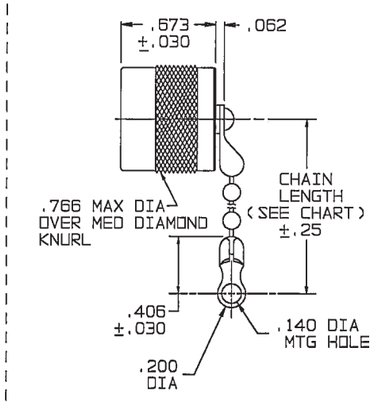

RFI85/RFI853-2 THRU

-11 SHOWN

STANDARD CHAIN &
MOUNTING LUG

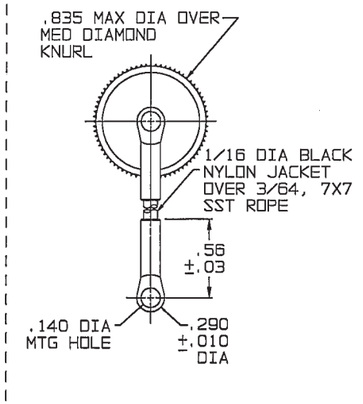

RFI385-12 THRU

-17 SHOWN

STAINLESS STEEL ROPE
AND MOUNTING LUG

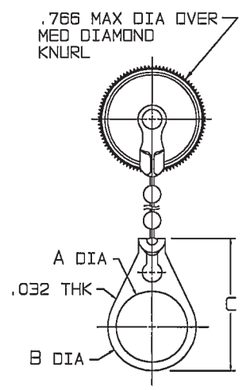

RFI85/RFI853-2-01

THRU -11-008 SHOWN

STANDARD CHAIN AND
BULKHEAD JACK
MOUNTING LUG

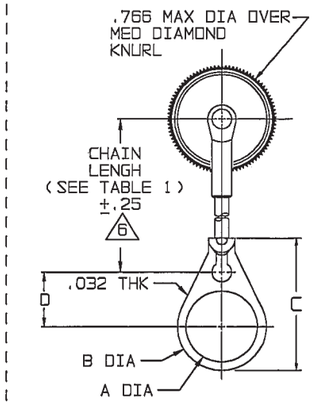

RFI85/RFI853-12-01

THRU -17-008 SHOWN

SST ROPE AND BULKHEAD
JACK MOUNTING LUG

4. EXAMPLE OF COMPLETE MODEL NO: RFI85-2-01
   - BASIC MODEL NO
   - CHAIN/ROPE MATL AND LENGTH (SEE TABLE 1)
   - BULKHEAD JACK MOUNTING LUG (OPTIONAL)

3. MALE "C" STYLE DUST CAP

2. FINISH: TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES

QTY	DESCRIPTION			PART NUMBER	ITEM
	TOL UNLESS SPECIFIED .XX ± .XXX ± .005 .XXXX ANGLES ±	TROMPETER RF connectivity		RFI 85/853/385	
DWN	OKC 3-21-00	MATERIAL	CODE IDENT	DRAWING NO.	REV
CHK		—	14949	305-0137	F
ENGR					
APPR		SCALE 2/1	DATE 11-14-73	SHEET 1C	

NEXT ASSY