




BATTERY DESIGN YOU CAN TRUST

## SEMI-CUSTOM LITHIUM BATTERY PACKS



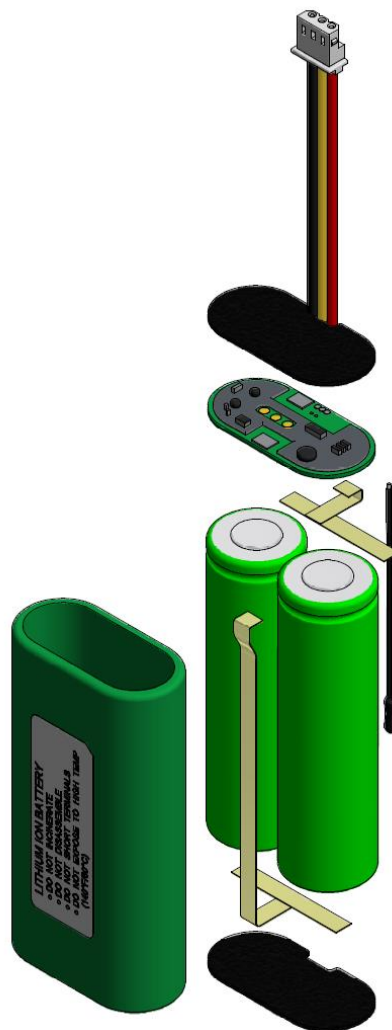

To buy or discuss any of the products in the CellPac BLOX range:

USA	EUROPE	ASIA
<p><b>VARTA Microbattery, Inc.</b> 555 Theodore Fremd Avenue, Suite C304 Rye, NY 10580, USA Tel +1 914 592 25 00 Fax +1 914 3450 488</p>	<p><b>Anglia</b> Mr. Andrew Pockson <a href="mailto:connectivity@anglia-m2m.com">connectivity@anglia-m2m.com</a> Tel: +44 1945 475 216 Fax: +44 1945 474 849 <a href="http://www.anglia.com">www.anglia.com</a></p>	<p><b>VARTA Microbattery Pte. Ltd.</b> 300, Tampines Avenue 5, #05-01 Tampines Junction, 529653 Singapore Tel +65 6 260 58 01 Fax +65 6 260 58 12</p>
	<p><b>Arrow Europe</b> Mr. Christian Schmidt <a href="mailto:cschmidt@arroeurope.com">cschmidt@arroeurope.com</a> Tel: +49 6102 5030 8262 <a href="http://www.arrow.com">www.arrow.com</a></p>	<p><b>VARTA Microbattery Pte. Ltd.</b> Room 1702-3, 17/F., Fullerton Centre 19 Hung to Road, Kwun Tong Tel +852 28 98 83 73 Fax +852 28 97 76 09</p>
	<p><b>Avnet Abacus</b> Mr. Tim Parker <a href="mailto:tim.parker@avnet-abacus.eu">tim.parker@avnet-abacus.eu</a> Tel: +44 1628 512 904 Mo: +44 7768 396 697 <a href="http://www.avnet-abacus.eu">www.avnet-abacus.eu</a></p>	<p><b>VARTA Microbattery Pte. Ltd.</b> Kyobashi Y'SUS Bldg, 3F. 1-6-12, Kyobashi, Chuo-Ku Tokyo 104-0031, Japan Tel +81 3 35 67 81 71 Fax +81 3 35 67 81 75</p>
	<p><b>Haug Components Holding GmbH</b> Mr. Dominik Peuker <a href="mailto:d.peuker@haug-components.com">d.peuker@haug-components.com</a> Tel: +49 6081 405-180 <a href="http://www.haug-components.com/de/">www.haug-components.com/de/</a></p>	<p><b>VARTA Microbattery Pte. Ltd.</b> 11F-4, No. 130, Section 2 Chung Hsaio East Road Taipei 10053, Taiwan Tel +886 233 931 557 Fax: +886 233 931 556</p>
	<p><b>Texim Europe</b> Mr. Jos Knippers <a href="mailto:jos.knippers@texim-europe.com">jos.knippers@texim-europe.com</a> Tel: +31 53 573 33 33 Fax: +31 53 573 33 30 <a href="http://www.texim-europe.com">www.texim-europe.com</a></p>	
	<p><b>Weisbauer Elektronik</b> Mr. Thomas Arnold <a href="mailto:tarnold@weisbauer.de">tarnold@weisbauer.de</a> Tel: +49 23155 730 225 Fax: +49 23155 760 233 <a href="http://www.weisbauer.de">www.weisbauer.de</a></p>	

For more information visit our website [www.varta-storage.com/en.html](http://www.varta-storage.com/en.html)

## Overview



---

### CellPac BLOX – Semi-Custom Battery Design

CellPac BLOX suits those customers in need of semi-customization and where design-cycles, engineering costs and time to market must be minimized for success. Battery designs are limited in their complexity, but available for nearly no NRE cost and development effort.



---

### CellPac PLUS – Custom Lithium Rechargeable Design Service

VARTA Storage's CellPac PLUS service focuses on designing and manufacturing customer-specific battery packs for mobile equipment. VARTA Storage combines its expert knowledge in cell chemistry and electronics with extensive market experience – for example in the fields of communications, medical technology, robotics and special-industrial. Because they are designed for specific applications, CellPac PLUS power packs offer maximum safety, reliability and efficiency.



---

### CellPac LITE - Our Range of Standard Lithium-Ion Packs

We offer a range of pre-configured battery packs that are immediately available for standard applications: CellPac LITE. They are made exclusively of cylindrical or prismatic lithium batteries. CellPac LITE power packs are fitted with an electronic protective switch and additional overcurrent protection. They comply with the requirements of safety standard UL 1642. Find more information on the website: [www.varta-storage.com](http://www.varta-storage.com).

## CONTENTS

1.	<b>Introduction to CellPac BLOX</b>	<b>1</b>
2.	<b>FAQ - Frequently Asked Questions</b>	<b>2</b>
3.	<b>The CellPac BLOX Range of Cells</b>	<b>3</b>
4.	<b>Connectors</b>	<b>4</b>
5.	<b>Individual BLOX Datasheets</b>	<b>5 – 29</b>
6.	<b>Design Tips for VARTA CellPac BLOX Battery Packs</b>	<b>30 – 33</b>
7.	<b>Reliability and Life Expectancy</b>	<b>34</b>
8.	<b>Safety</b>	<b>35</b>
9.	<b>Storage</b>	<b>36</b>
10.	<b>Transportation of VARTA CellPac BLOX Batteries</b>	<b>36</b>
11.	<b>Proper Use and Handling</b>	<b>36</b>

© by VARTA Storage GmbH, February 2018

Note: This handbook is subject to change without prior notice and should be used in an advisory capacity and does not form part of any offer. Data and product availability is updated and the latest version of this handbook can be downloaded from our website at the following link:


[www.varta-storage.com/cellpac-blox](http://www.varta-storage.com/cellpac-blox).

## 1. Introduction to CellPac BLOX

### How does CellPac BLOX work?

This handbook is a portfolio of all combinations of cells and PCM which can be ordered under the CellPac BLOX program. We have already reviewed and tested these combinations in detail to ensure a good fit between the cell and safety electronics.

On the following pages, there is detailed information about each cell and the cell performance as well as the configurations which can be ordered of that type. On each datasheet page, there is a **CellPac BLOX Order Reference Number** (CPB XXXX) and MOQ for that individual battery.

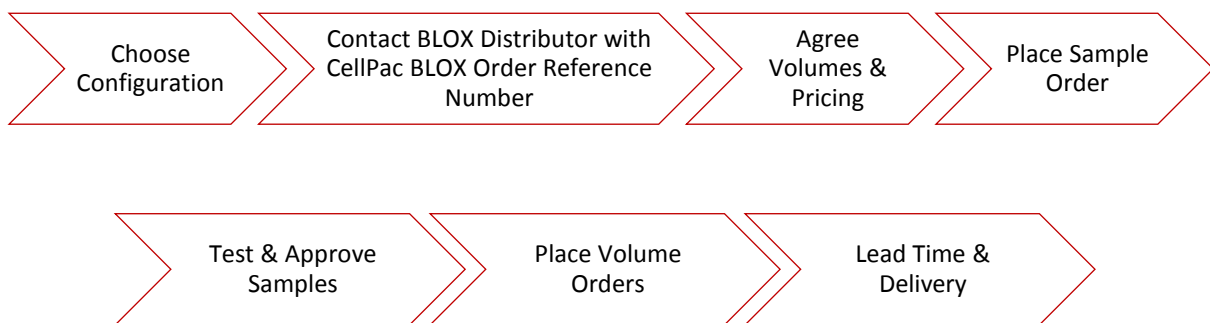

The VARTA CellPac BLOX distributor will quote the customer for samples, mass production and any NREs if necessary. All that needs to be provided to quote you is:

- ▶ CPB Reference Number
- ▶ Wire & connector requirements (wire length & connector type)
- ▶ Mass production quantities for pricing determination

Once orders are received for samples, VARTA will work on a battery drawing and build samples of the battery, which will be shipped normally within 3 weeks from order. After internal customer testing of the samples you can send the approved drawing back to your distributor and order the agreed mass production quantity with any necessary NREs, which were already determined. The provided drawing of the battery is the master document and defines the battery (check it carefully!). Lead time for mass production is typically 12-16 weeks. Please note that this will be longer if certification such as IEC62133 edition 2 is required for the battery pack.

## 2. FAQ - Frequently Asked Questions

### **How many samples can be ordered?**

Up to 25 samples can be ordered to test and validate the design.

### **How long does it take?**

Once POs are placed and your project is started, a technical drawing of the final battery and the samples will be provided for you for drawing approval and samples testing. We aim to ship the drawing and sample bundle within 3 weeks.

For the mass production order after your approval the typical lead time can vary between 12 and 16 weeks for the mass production quantity. Actual lead-times can be checked via your distributor when you discuss your individual requirements.

### **I need a high volume, is special pricing available?**

CellPac BLOX can be ordered at any volume above the MOQ but fits best to OEMs requiring volumes of 5000-50k pcs. Pricing can be negotiated with your distributor to reflect commitment levels.


### **Why is there an NRE (Non-Recurring Engineering) charge?**


Your battery will be a new design, with its own part number. As well as the new drawing, there will be manufacturing and quality documentation established. Fixtures will be produced to ensure repeatable quality and UN38.3 testing and certification is mandatory. NRE is kept as low as possible and avoided completely in many cases.


### **Can the CellPac BLOX battery be certified for special requirements, such as IEC62133 edition 2?**

Yes, additional certification is possible for medium-to-high volume projects but more time and effort is involved. Please discuss your individual requirements with your VARTA representative.

### 3. The CellPac BLOX Range of Cells

	Cell	Nominal Capacity
<b>Cylindrical</b> 	LIC 18650-22 S3B	2200mAh
	LIC 18650-26	<b>New version coming in 2018</b>
	LIC 18650-29 EC	2850mAh

	Cell	Nominal Capacity
<b>Prismatic</b> 	LIP 103450	<b>New version coming in 2018</b>

	Cell	Nominal Capacity
<b>Polymer</b> 	LPP 402025 CE	150mAh
	LPP 702035 S	430mAh
	LPP 443441 S	660mAh
	LPP 463149 S	700mAh
	LPP 523450 S	1000mAh
	LPP 423566 BE	1160mAh
	LPP 503562 S	1200mAh
	LPP 503759 8HH	1400mAh
	LPP 454261 8TH	1590mAh
LPP 683566 BE	1880mAh	

## 4. Connectors

If the choice of the connector is not critical, VARTA will supply you with a standard 2-Pin or 3-Pin Connector for your battery. If you want to have special connector from our existing range, please inform your BLOX distributor. This will be specified in your battery drawing. We handle a large number of connector types from the majority of market-leading manufacturers. In the rare case that your connector requirement cannot be met, you will be informed.

## 5. Individual BLOX Datasheets

### Facts and Figures

#### LIP 563450 WC

**SYSTEM**

- System: Li-Ion
- Recognition: UA 1942
- Nominal Voltage: 3.7 V
- Nominal Capacity: 1100 mAh (at 20°C and 20°C)
- Minimum Capacity: 1000 mAh
- Impedance Index: 800 mΩ @ 10 Hz at 4.2 V
- Life Expectancy: 500 cycles for 800 mAh

**SIZE**

- Width (w): 34.8 mm (max.)
- Length (L): 52.0 mm (max.)
- Case Height (H): 8.5 mm (max.)
- Weight (approx.): 23.2 g

**FUNCTIONS**

- Charging Method: Constant Current + Constant Voltage
- Charge Voltage: 4.20 V (90 min)
- Initial Charge Current: Standard Charge: 600 mA
- Rapid Charge: 1100 mA
- Charging Cut-Off (V<sub>OCV</sub>): Standard Charge 3 h
- Activity: Rapid Charge 2.5 h
- Self-discharge: 2.5% / year
- Discharge Cut-Off Voltage: 2.75 V
- Max. Continuous Discharge Current: 2200 mA

**OPERATING TEMPERATURE**

- Charge: 0°C to 45°C
- Discharge: -20°C to 60°C
- 1 Month at -20°C to 60°C: 80%
- 3 Month at -20°C to 60°C: 60%
- 1 Year at -20°C to 60°C: 40%

**STORAGE TEMPERATURE**

- Capacity Recovery Rate: 1 Year at 20°C to 25°C: 95%

**CONFIGURATIONS**

	33P	33P
Nominal Capacity	1100 mAh	2000 mAh
Nominal Voltage	3.70 V	3.70 V
Watt-Hour Rating	4.18 Wh	8.36 Wh
Charge Temperature	0 to 45°C	0 to 45°C
Discharge Temperature	-20 to 60°C	-20 to 60°C
Overcharge Detection	4.3 V ± 20 mV	4.3 V ± 20 mV
Overdischarge Detection	2.4 V ± 35 mV	2.4 V ± 35 mV
REC	2.5A - 5.5A	2.5A - 5.5A
REC	10A-14.5A	10A-14.5A

**ORDER INFO**

Order Reference Number	CPB	CPB
Technical Handbook BLOX	VARTA Storage GmbH	Page   25

**FUNCTIONS**

- Charging Method: Constant Current + Constant Voltage
- Charge Voltage: 4.20 V (90 min)
- Initial Charge Current: Standard Charge: 600 mA
- Rapid Charge: 1100 mA
- Charging Cut-Off (V<sub>OCV</sub>): Standard Charge 3 h
- Activity: Rapid Charge 2.5 h
- Self-discharge: 2.5% / year
- Discharge Cut-Off Voltage: 2.75 V
- Max. Continuous Discharge Current: 2200 mA

**OPERATING TEMPERATURE**

- Charge: 0°C to 45°C
- Discharge: -20°C to 60°C
- 1 Month at -20°C to 60°C: 80%
- 3 Month at -20°C to 60°C: 60%
- 1 Year at -20°C to 60°C: 40%

**STORAGE TEMPERATURE**

- Capacity Recovery Rate: 1 Year at 20°C to 25°C: 95%

**CONFIGURATIONS**

	33P	33P	33P
Nominal Capacity	1100 mAh	2000 mAh	2000 mAh
Nominal Voltage	3.70 V	3.70 V	3.70 V
Watt-Hour Rating	4.18 Wh	8.36 Wh	16.72 Wh
Charge Temperature	0 to 45°C	0 to 45°C	0 to 45°C
Discharge Temperature	-20 to 60°C	-20 to 60°C	-20 to 60°C
Overcharge Detection	4.3 V ± 20 mV	4.3 V ± 20 mV	4.3 V ± 20 mV
Overdischarge Detection	2.4 V ± 35 mV	2.4 V ± 35 mV	2.4 V ± 35 mV
REC	2.5A - 5.5A	2.5A - 5.5A	2.5A - 5.5A
REC	10A-14.5A	10A-14.5A	10A-14.5A

**ORDER INFO**

Order Reference Number	CPB	CPB	CPB
Technical Handbook BLOX	VARTA Storage GmbH	Page   19	

**FUNCTIONS**

- Charging Method: Constant Current + Constant Voltage
- Charge Voltage: 4.20 V (90 min)
- Initial Charge Current: Standard Charge: 600 mA
- Rapid Charge: 1100 mA
- Charging Cut-Off (V<sub>OCV</sub>): Standard Charge 3 h
- Activity: Rapid Charge 2.5 h
- Self-discharge: 2.5% / year
- Discharge Cut-Off Voltage: 2.75 V
- Max. Continuous Discharge Current: 2200 mA

**OPERATING TEMPERATURE**

- Charge: 0°C to 45°C
- Discharge: -20°C to 60°C
- 1 Month at -20°C to 60°C: 80%
- 3 Month at -20°C to 60°C: 60%
- 1 Year at -20°C to 60°C: 40%

**STORAGE TEMPERATURE**

- Capacity Recovery Rate: 1 Year at 20°C to 25°C: 95%

**CONFIGURATIONS**

	33P	33P	33P
Nominal Capacity	1100 mAh	2000 mAh	2000 mAh
Nominal Voltage	3.70 V	3.70 V	3.70 V
Watt-Hour Rating	4.18 Wh	8.36 Wh	16.72 Wh
Charge Temperature	0 to 45°C	0 to 45°C	0 to 45°C
Discharge Temperature	-20 to 60°C	-20 to 60°C	-20 to 60°C
Overcharge Detection	4.3 V ± 20 mV	4.3 V ± 20 mV	4.3 V ± 20 mV
Overdischarge Detection	2.4 V ± 35 mV	2.4 V ± 35 mV	2.4 V ± 35 mV
REC	2.5A - 5.5A	2.5A - 5.5A	2.5A - 5.5A
REC	10A-14.5A	10A-14.5A	10A-14.5A

**ORDER INFO**

Order Reference Number	CPB	CPB	CPB
Technical Handbook BLOX	VARTA Storage GmbH	Page   41	

# Facts and Figures

## LIC 18650-22S3B

### SYSTEM



System	▶ Li-Ion
Recognition	▶ UL 1642 ▶ IEC62133 ed. 2
Nominal Voltage	▶ 3.6 V
Nominal Capacity	▶ 2200 mAh
Minimum Capacity, C	▶ 2150 mAh (at 0.2C and 25±2°C, 3.0V)
Impedance Initial	▶ ≤100 mΩ @ 1kHz at 4.2 V
Life Expectancy	▶ 500 cycles for ≥80 %

### BATTERY

Diameter (d)	▶ 18.4 mm (max.)
Height (h)	▶ 65.05 mm (max.)
Weight, approx.	▶ 47 g

### FUNCTION

Charging Method	▶ Constant Current + Constant Voltage
Charge Voltage	▶ 4.20 V (± 50mV)
Initial Charge Current	▶ Standard Charge: 1075 mA ▶ Rapid Charge: 2150 mA
Charging Cut-Off (a) or (b)	
a) by time	▶ Standard Charge: 3h ▶ Rapid Charge: 2.5h
b) by min. current	▶ 50mA
Discharge Cut-Off voltage	▶ 3.0 V
Max. Continuous Discharge Current	▶ 1075mA (-20°C-5°C) ▶ 4300mA (5°C-45°C) ▶ 3225mA (45-60°C)

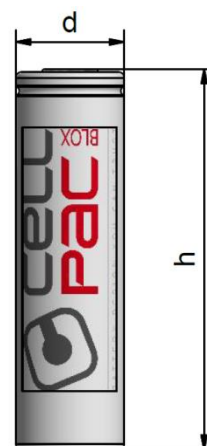

### DATA CONNECTION

Operating Temperature	▶ Charge: 0°C to+ 45°C ▶ Discharge: -20°C to +60°C
Storage Temperature	▶ 1 Month at -20°C to +60°C >80%
Capacity Recovery Rate	▶ 3 Month at -20°C to +45°C >80% ▶ 1 Year at -20°C to +20°C >80%

CONFIGURATIONS	1S1P	1S2P sbs *	2S1P sbs *	1S3P sbs *
<b>Rated Capacity</b>	2200 mAh	4400 mAh	2200 mAh	6600 mAh
<b>Nominal Voltage</b>	3.60 V	3.60 V	7.20 V	3.60 V
<b>Watt-Hour Rating</b>	7.92 Wh	15.84 Wh	15.84 Wh	23.76 Wh
<b>Charge Temperature</b>	0 to +45°C	0 to +45°C	0 to +45°C	0 to +45°C
<b>Discharge Temperature</b>	-20 to +60°C	-20 to +60°C	-20 to +60°C	-20 to +60°C
<b>Overcharge Detection</b>	4.2 V ± 50 mV	4.275 V ± 25 mV	4.35 V ± 25 mV	4.275 V ± 25 mV
<b>Overdischarge Detection</b>	2.4 V ± 35 mV	2.3 V ± 80 mV	2.3 V ± 50 mV	2.3 V ± 80 mV
<b>Overcurrent Detection</b>	6A - 8A	4A - 6.3A	2.6A - 4.6A	4A - 6.3A
<b>NTC</b>	10k B=3435k	10k B=3435k	10k B=3435k	10k B=3435k
<b>MOQ/ MDQ</b>	<b>5.000</b>	<b>5.000</b>	<b>5.000</b>	<b>5.000</b>
<b>Order Reference Number</b>	<b>CPB 1001</b>	<b>CPB 1002</b>	<b>CPB 1003</b>	<b>CPB 1004</b>

\* sbs – denotes cells will be side by side


# Discharge Characteristics

## LIC 18650-22S3B Discharge Profile

### Test Conditions:

- 1 – 3 cycles      Charge 1.0C; tmax = 3h; Imin = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V
- 2 – 1 cycle      Charge 1.0C; tmax = 3h; Imin = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

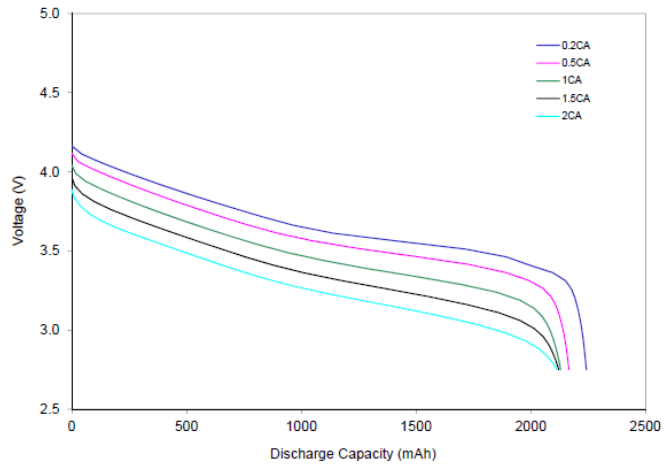

## LIC 18650-22S3B Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C; t = 3h; Imin 0.02C; Umax = 4.2V at room temperature)  
4h rest at the below mentioned temperatures


Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

*Pending*

## LIC 18650-22S3B Cycling at 20°C

### Test Conditions:

- a) Capacity charge (1.0C; t = 3h; Imin 0.02C; Umax = 4.2V) discharge (1.0C; UEOD = 3.0V) Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles
- b) Impedance measurements before and after cycling reference impedance according to specification of cell.
- c) Thickness measurement before and after cycling reference thickness according to specification of cell

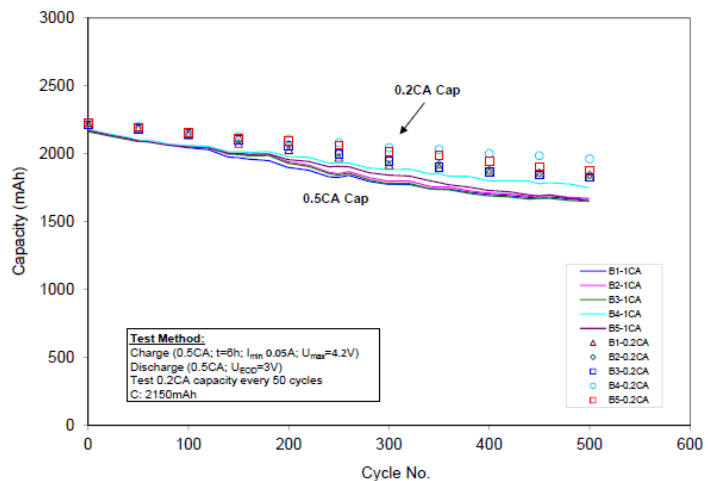

# Facts and Figures

## LIC 18650-29 EC

### SYSTEM



System	▶ Li-Ion
Recognition	▶ UL 1642
Nominal Voltage	▶ 3.65 V
Nominal Capacity, C	▶ 2850 mAh (at 0.2C and 20°C)
Minimum Capacity	▶ 2750 mAh
Impedance Initial	▶ ≤45 mΩ @ 1kHz at 4.2V
Life Expectancy <sup>1)</sup>	▶ 500 cycles for ≥1868 mAh

### BATTERY

Diameter (d)	▶ 18.4 mm (max.)
Height (h)	▶ 65.0 mm (max.)
Weight, approx.	▶ 48.0 g

### FUNCTION

Charging Method	▶ Constant Current + Constant Voltage
Charge Voltage	▶ 4.20V (± 50mV)
Initial Charge Current	▶ Standard Charge: 1375 mA
	▶ Rapid Charge: 2750 mA
Charging Cut-Off (a) or (b)	
a) by time	▶ Standard Charge: 3h
	▶ Rapid Charge: 2.5 h
b) by min. current	▶ 0.02 C
Discharge Cut-Off voltage	▶ 2.5 V
Max. Continuous Discharge Current	▶ 5500 mA

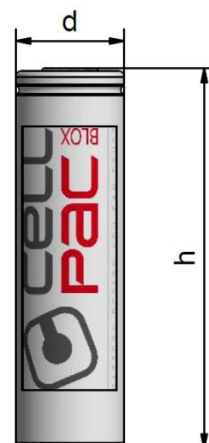

### DATA CONNECTION

Operating Temperature	▶ Charge: 0 °C to + 45 °C
	▶ Discharge: -20 °C to +60 °C
Storage Temperature	▶ 1 Month at -20 °C to +60 °C >80%
Capacity Recovery Rate	▶ 3 Month at -20 °C to +45 °C >80%
	▶ 1 Year at -20 °C to +25 °C >80%

CONFIGURATIONS	1S1P	1S2P sbs *
Minimal Capacity	2850 mAh	5700 mAh
Nominal Voltage	3.65 V	3.65 V
Watt-Hour Rating	10.40 Wh	20.81 Wh
Charge Temperature	0 to +45°C	0 to +45°C
Discharge Temperature	-20 to +60°C	-20 to +60°C
Overcharge Detection	4.3 V ± 25 mV	4.275 V ± 25 mV
Overdischarge Detection	2.4 V ± 35 mV	2.3 V ± 80 mV
Overcurrent Detection	6A - 8A	4A - 6.3A
NTC	10k B=3435k	10k B=3435k
MOQ/ MDQ	<b>30.000</b>	<b>15.000</b>
Order Reference Number	<b>CPB 1011</b>	<b>CPB 1012</b>

\* sbs – denotes cells will be side by side

# Discharge Characteristics


## LIC 18650-29 EC Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C; tmax = 3h; Imin = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C; tmax = 3h; Imin = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

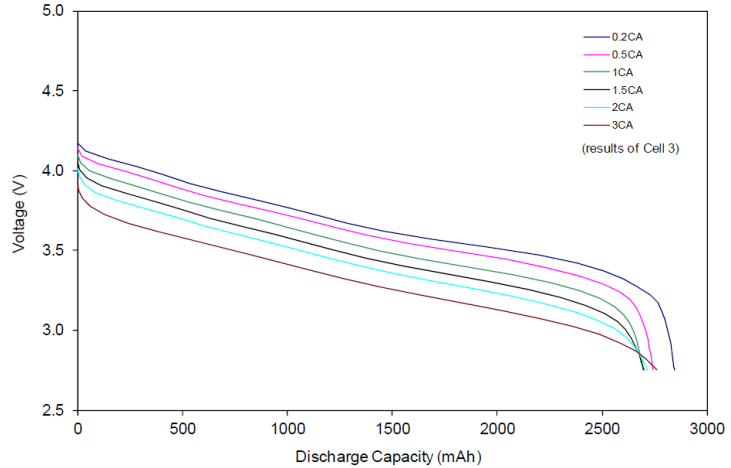


## LIC 18650-29 EC Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C; t = 3h; Imin 0.02C; Umax = 4.2V at room temperature)  
4h rest at the below mentioned temperatures

Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

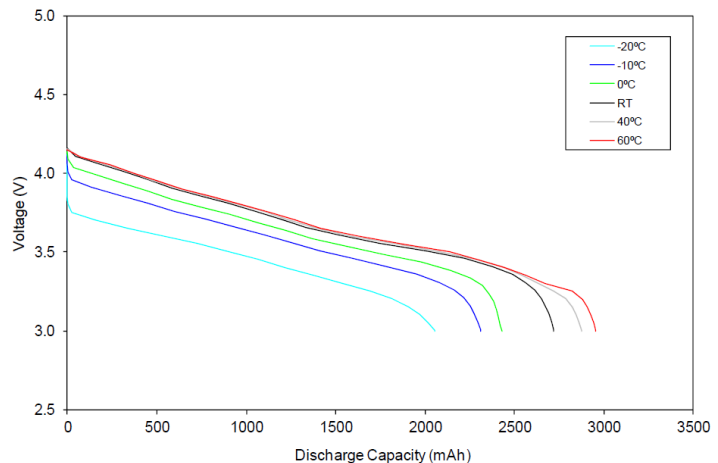


## LIC 18650-29 EC Cycling at 20°C

### Test Conditions:

d) Capacity charge (1.0C; t = 3h; Imin 0.02C; Umax = 4.2V)  
discharge (1.0C; UEOD = 3.0V)  
Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles

e) Impedance measurements before and after cycling reference impedance according to specification of cell.

f) Thickness measurement before and after cycling reference thickness according to specification of cell

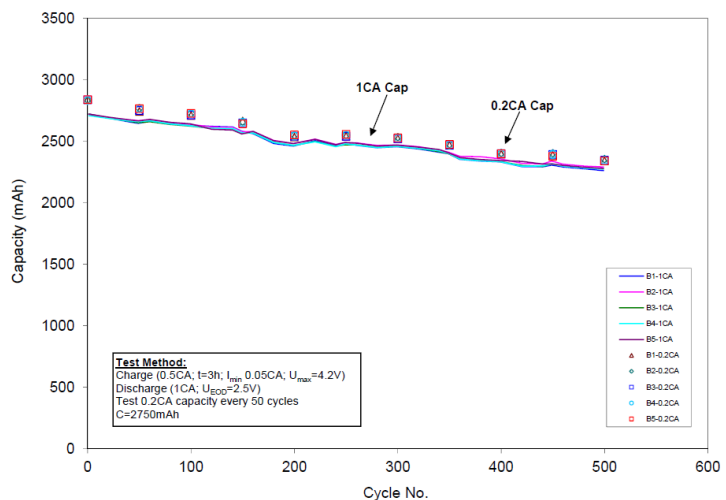

# Facts and Figures

## LPP 402025 CE

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 150 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 140 mAh
- Impedance Initial ▶  $\leq 180 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 400 cycles for  $\geq 105 \text{ mAh}$

### BATTERY


- Length (l) ▶ 25.5 mm (max.)
- Width (w) ▶ 20.5 mm (max.)
- Height (h) ▶ 4.3 mm (max.)
- Weight, approx. ▶ 3.7 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 70 mA
- ▶ Rapid Charge: 140 mA
- Charging Cut-Off (a) or (b)
  - a) by time ▶ Standard Charge: 5 h
  - ▶ Rapid Charge: 2.5 h
  - b) by min. current ▶ 0.05 C
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 280 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C
- ▶ Discharge: -20°C to +60°C
- Storage Temperature ▶ 1 Month at -20°C to +45°C >80%
- Capacity Recovery Rate ▶ 6 Month at -20°C to +35°C >80%

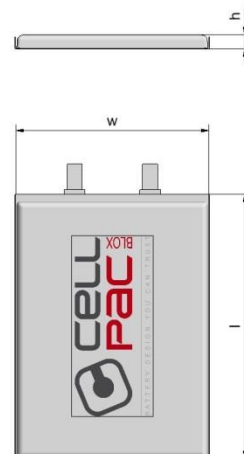

CONFIGURATIONS	1S1P	1S2P stack
Minimal Capacity	150 mAh	300 mAh
Nominal Voltage	3.70 V	3.70 V
Watt-Hour Rating	0.56 Wh	1.11 Wh
Charge Temperature	0 to +45°C	0 to +45°C
Discharge Temperature	-20 to +60°C	-20 to +60°C
Overcharge Detection	4.28 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.8 V $\pm$ 50 mV	2.8 V $\pm$ 50 mV
Overcurrent Detection	1.2A - 4A	1.2A - 4A
NTC	10k B=3435k	10k B=3435k
MOQ/ MDQ	50.000	25.000
Order Reference Number	CPB 3001	CPB 3002

# Discharge Characteristics


## LPP 402025 CE Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C; tmax = 3h; Imin = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C; tmax = 3h; Imin = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

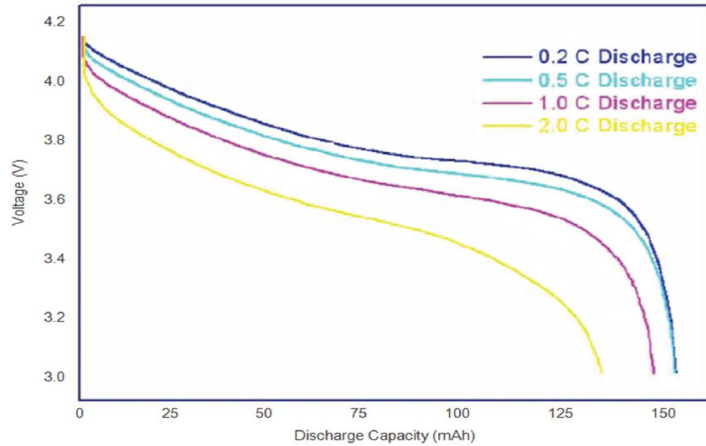


## LPP 402025 CE Temperature Profile @ 1C/0.2C

### Test Conditions:

Charge (1.0C; t = 3h; Imin 0.02C; Umax = 4.2V at room temperature)  
4h rest at the below mentioned temperatures


Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

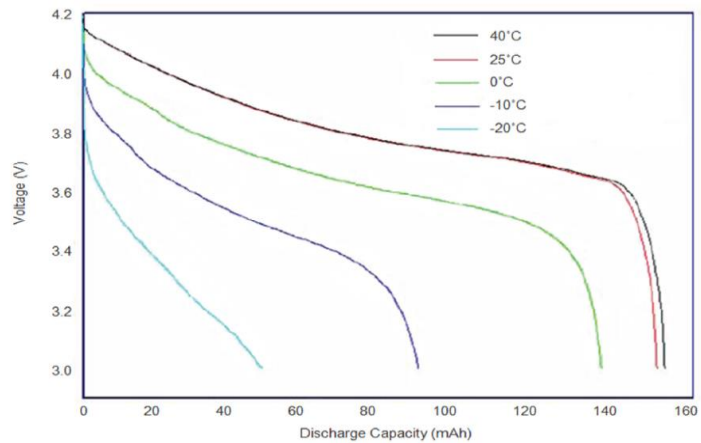

## LPP 402025 CE Cycling at 20°C

### Test Conditions:

- Capacity charge (1.0C; t = 3h; Imin 0.02C; Umax = 4.2V) discharge (1.0C; UEOD = 3.0V) Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles
- Impedance measurements before and after cycling reference impedance according to specification of cell.
- Thickness measurement before and after cycling reference thickness according to specification of cell

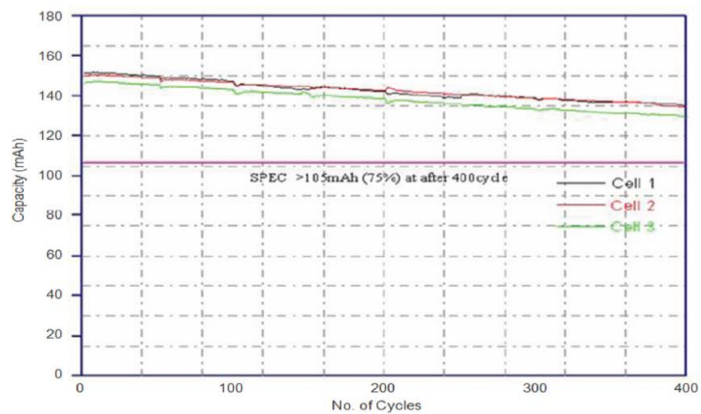


# Facts and Figures

## LPP 423566 BE

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.70 V
- Nominal Capacity, C ▶ 1160 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 1130 mAh
- Impedance Initial ▶  $\leq 80 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 400 cycles for  $\geq 848 \text{ mAh}$

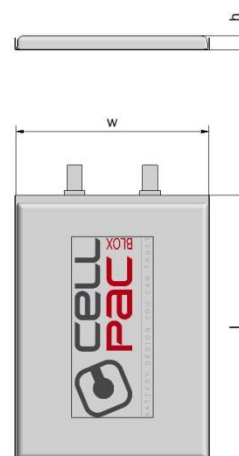

### BATTERY

- Length (l) ▶ 65.4 mm (max.)
- Width (w) ▶ 35.0 mm (max.)
- Height (h) ▶ 4.5 mm (max.)
- Weight, approx. ▶ 25.0 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 565 mA
- ▶ Rapid Charge: 1130 mA
- Charging Cut-Off (a) or (b)
  - a) by time ▶ Standard Charge: 5 h
  - ▶ Rapid Charge: 2.5 h
  - b) by min. current ▶ 0.02 C
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 2260 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C
- ▶ Discharge: -20°C to +60°C
- Storage Temperature ▶ 1 Month at -20°C to +45°C >85%
- ▶ 3 Month at -20°C to +45°C >80%
- Capacity Recovery Rate ▶ 1 Year at -20°C to +35°C >80%

CONFIGURATIONS	1S1P	2S1P stack
Minimal Capacity	1160 mAh	1160 mAh
Nominal Voltage	3.70 V	7.40 V
Watt-Hour Rating	4.29 Wh	8.58 Wh
Charge Temperature	0 to +45°C	0 to +45°C
Discharge Temperature	-20 to +60°C	-20 to +60°C
Overcharge Detection	4.275 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.3 V $\pm$ 58 mV	2.4 V $\pm$ 50 mV
Overcurrent Detection	2A - 4A	2.7A - 5.5A
NTC	10k B=3380k	10k B=3380k
MOQ/ MDQ	50.000	25.000
Order Reference Number	CPB 3005	CPB 3006

# Discharge Characteristics


## LPP 423566 BE Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

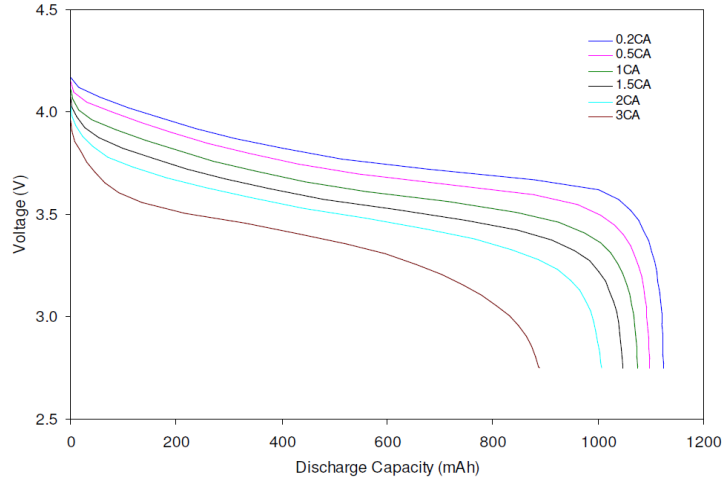


## LPP 423566 BE Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V at room temperature)  
4h rest at the below mentioned temperatures

Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

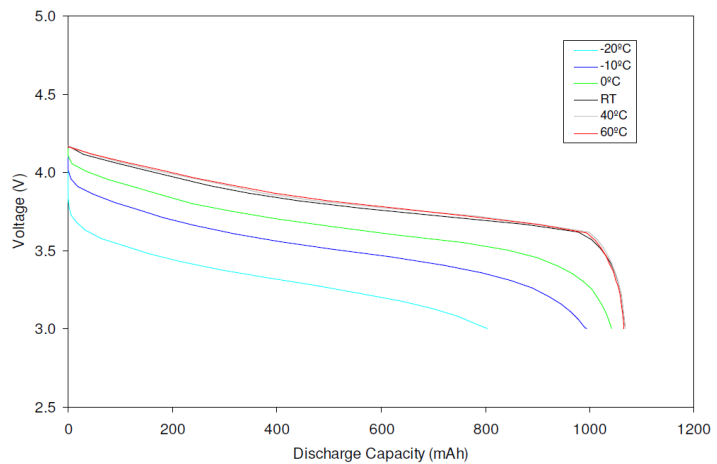


## LPP 423566 BE Cycling at 20°C

### Test Conditions:

a) Capacity charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V) discharge (1.0C; UEOD = 3.0V)  
Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles

b) Impedance measurements before and after cycling reference impedance according to specification of cell.

c) Thickness measurement before and after cycling reference thickness according to specification of cell

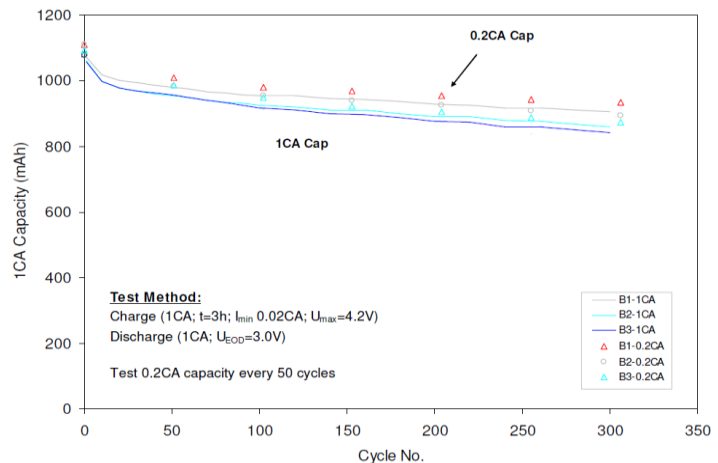

# Facts and Figures

## LPP 443441 S

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 660 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 630 mAh
- Impedance Initial ▶  $\leq 70 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 500 cycles for  $\geq 70 \%$

### BATTERY


- Length (l) ▶ 39.0 mm (max.)
- Width (w) ▶ 34.0 mm (max.)
- Height (h) ▶ 4.5 mm (max.)
- Weight, approx. ▶ 12.8 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 315 mA  
Rapid Charge: 630 mA
- Charging Cut-Off (a) or (b)  
a) by time ▶ Standard Charge: 3.5 h  
Rapid Charge: 2.5 h
- b) by min. current ▶ 6.3 mA
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 1260 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C  
Discharge: -10°C to +60°C
- Storage Temperature ▶ 1 Month at -20°C to +45°C >90%
- Capacity Recovery Rate ▶ 3 Month at -20°C to +45°C >80%
- ▶ 1 Year at -20°C to +30°C >80%

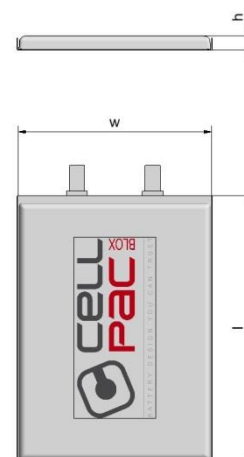

CONFIGURATIONS	1S1P	1S2P sbs *	2S1P sbs *	2S1P stack
Minimal Capacity	660 mAh	1320 mAh	660 mAh	660 mAh
Nominal Voltage	3.70 V	3.70 V	7.40 V	7.40 V
Watt-Hour Rating	2.44 Wh	4.88 Wh	4.88 Wh	4.88 Wh
Charge Temperature	0 to +45°C	0 to +45°C	0 to +45°C	0 to +45°C
Discharge Temperature	-10 to +60°C	-10 to +60°C	-10 to +60°C	-10 to +60°C
Overcharge Detection	4.275 V $\pm$ 25 mV	4.275 V $\pm$ 25 mV	4.325 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.3 V $\pm$ 58 mV	2.3 V $\pm$ 58 mV	2.2 V $\pm$ 50 mV	2.8 V $\pm$ 50 mV
Overcurrent Detection	2A - 4A	2A - 4A	3.5A - 8A	2.7A - 5.5A
NTC	10k B=3380k	10k B=3380k	10k B=3380k	10k B=3380k
MOQ/ MDQ	30.000	15.000	15.000	15.000
Order Reference Number	CPB 3007	CPB 3008	CPB 3009	CPB 3010

\* sbs – denotes cells will be side by side

# Discharge Characteristics


## LPP 443441 S Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

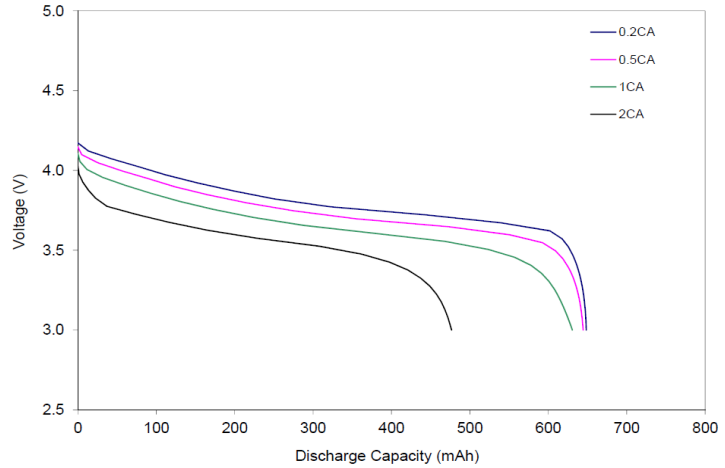


## LPP 443441 S Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V at room temperature)  
4h rest at the below mentioned temperatures

Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

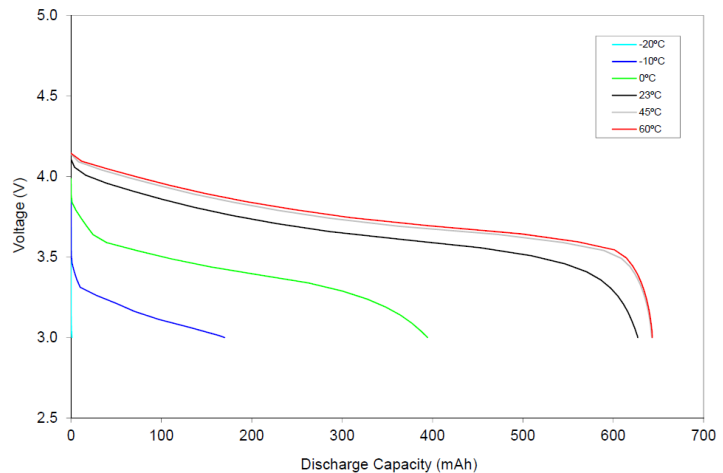


## LPP 443441 S Cycling at 20°C

### Test Conditions:

a) Capacity charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V) discharge (1.0C; UEOD = 3.0V) Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles

b) Impedance measurements before and after cycling reference impedance according to specification of cell.

c) Thickness measurement before and after cycling reference thickness according to specification of cell

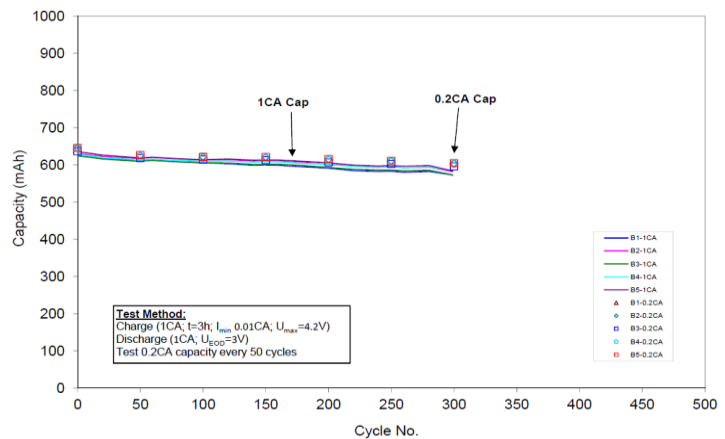

# Facts and Figures

## LPP 454261 8TH

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 1590 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 1530 mAh
- Impedance Initial ▶  $\leq 80 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 500 cycles for  $\geq 1030 \text{ mAh}$

### BATTERY


- Length (l) ▶ 61.5 mm (max.)
- Width (w) ▶ 42.0 mm (max.)
- Height (h) ▶ 4.60 mm (max.)
- Weight, approx. ▶ 27.8 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 1530 mA
- ▶ Rapid Charge: 2290 mA
- Charging Cut-Off (a) or (b)
  - a) by time ▶ Standard Charge: 2.5 h
  - ▶ Rapid Charge: 2.0 h
  - b) by min. current ▶ 50 mA
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 3060 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +50°C
- ▶ Discharge: -10°C to +60°C
- Storage Temperature ▶ 1 Month at -10°C to +45°C >85%
- Capacity Recovery Rate

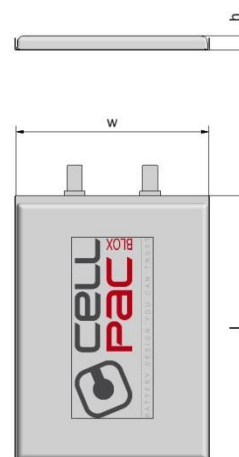

CONFIGURATIONS	1S1P	1S2P sbs *	2S1P sbs *	2S1P stack
Minimal Capacity	1590 mAh	3180 mAh	1590 mAh	1590 mAh
Nominal Voltage	3.70 V	3.70 V	7.40 V	7.40 V
Watt-Hour Rating	5.88 Wh	11.77 Wh	11.77 Wh	11.77 Wh
Charge Temperature	0 to +45°C	0 to +45°C	0 to +45°C	0 to +45°C
Discharge Temperature	-20 to +60°C	-20 to +60°C	-20 to +60°C	-20 to +60°C
Overcharge Detection	4.275 V $\pm$ 25 mV	4.275 V $\pm$ 25 mV	4.325 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.3 V $\pm$ 58 mV	2.3 V $\pm$ 58 mV	2.2 V $\pm$ 50 mV	2.4 V $\pm$ 50 mV
Overcurrent Detection	2A - 4A	2A - 4A	3.5A - 8A	2.7A - 5.5A
NTC	10k B=3380k	10k B=3380k	10k B=3380k	10k B=3380k
MOQ/ MDQ	5.000	5.000	5.000	5.000
Order Reference Number	CPB 3011	CPB 3012	CPB 3013	CPB 3014

\* sbs – denotes cells will be side by side

# Discharge Characteristics


## LPP 454261 8TH Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C;  $t_{max} = 3h$ ;  $I_{min} = 0.02C$ ; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C;  $t_{max} = 3h$ ;  $I_{min} = 0.02C$ ; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

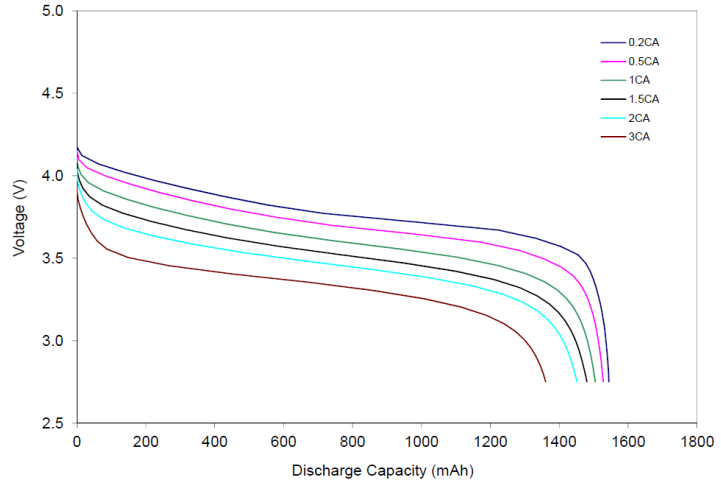


## LPP 454261 8TH Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C;  $t = 3h$ ;  $I_{min} 0.02C$ ;  
 $U_{max} = 4.2V$  at room temperature)  
4h rest at the below mentioned temperatures


Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

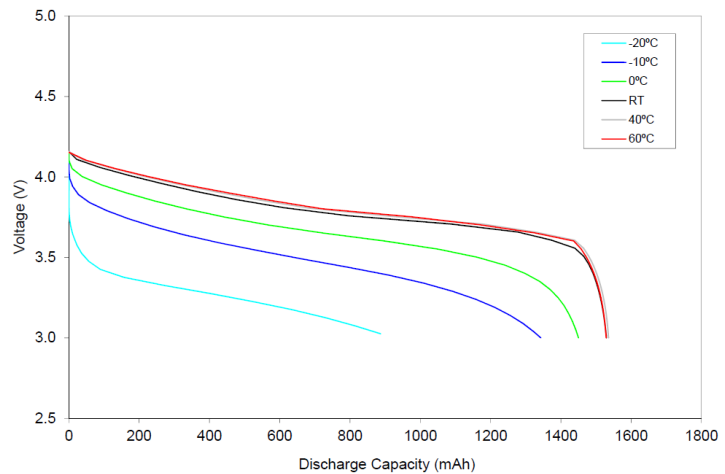

## LPP 454261 8TH Cycling at 20°C

### Test Conditions:

- Capacity  
charge (1.0C;  $t = 3h$ ;  $I_{min} 0.02C$ ;  $U_{max} = 4.2V$ )  
discharge (1.0C; UEOD = 3.0V)  
Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles
- Impedance measurements before and after cycling reference impedance according to specification of cell.
- Thickness measurement before and after cycling reference thickness according to specification of cell

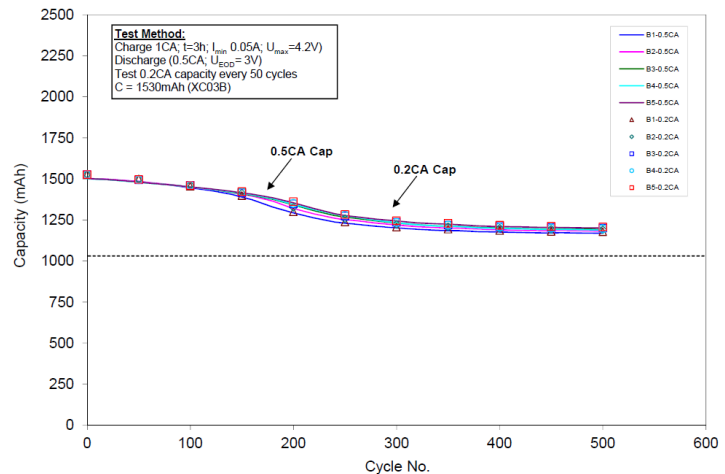

# Facts and Figures

## LPP 463149 S

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 700 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 670 mAh
- Impedance Initial ▶  $\leq 70 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 500 cycles for  $\geq 80 \%$

### BATTERY


- Length (l) ▶ 49.0 mm (max.)
- Width (w) ▶ 31.5 mm (max.)
- Height (h) ▶ 4.5 mm (max.)
- Weight, approx. ▶ 14.0 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 335 mA
- ▶ Rapid Charge: 670 mA
- Charging Cut-Off (a) or (b)
  - a) by time ▶ Standard Charge: 3.5 h
  - ▶ Rapid Charge: 2.5 h
  - b) by min. current ▶ 6.7 mA
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 670 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C
- ▶ Discharge: -20°C to +60°C
- Storage Temperature ▶ 1 Month at -20°C to +45°C >80%
- Capacity Recovery Rate ▶ 3 Month at -20°C to +45°C >80%
- ▶ 1 Year at -20°C to +30°C >80%

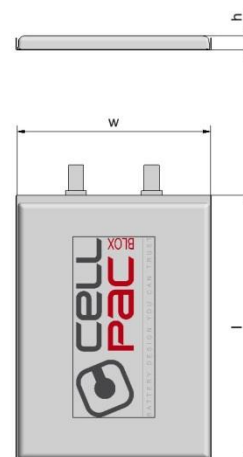

CONFIGURATIONS	1S1P	1S2P sbs *	2S1P sbs *	2S1P stack
Minimal Capacity	700 mAh	1400 mAh	700 mAh	700 mAh
Nominal Voltage	3.70 V	3.70 V	7.40 V	7.40 V
Watt-Hour Rating	2.59 Wh	5.18 Wh	5.18 Wh	5.18 Wh
Charge Temperature	0 to +45°C	0 to +45°C	0 to +45°C	0 to +45°C
Discharge Temperature	-20 to +60°C	-20 to +60°C	-20 to +60°C	-20 to +60°C
Overcharge Detection	4.275 V $\pm$ 25 mV	4.275 V $\pm$ 25 mV	4.325 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.3 V $\pm$ 58 mV	2.3 V $\pm$ 58 mV	2.2 V $\pm$ 50 mV	2.4 V $\pm$ 50 mV
Overcurrent Detection	2A - 4A	2A - 4A	3.5A - 8A	2.7A - 5.5A
NTC	10k B=3380k	10k B=3380k	10k B=3380k	10k B=3380k
MOQ/ MDQ	30.000	15.000	15.000	15.000
Order Reference Number	CPB 3015	CPB 3016	CPB 3017	CPB 3018

\* sbs – denotes cells will be side by side

# Discharge Characteristics


## LPP 463149 S Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

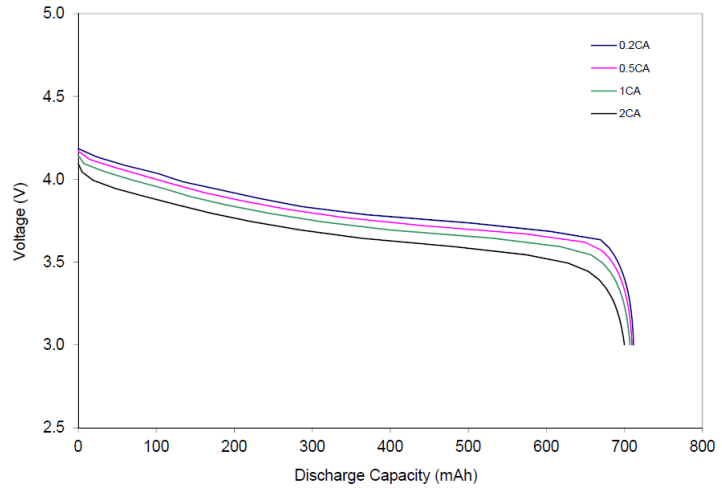


## LPP 463149 S Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V at room temperature)  
4h rest at the below mentioned temperatures

Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

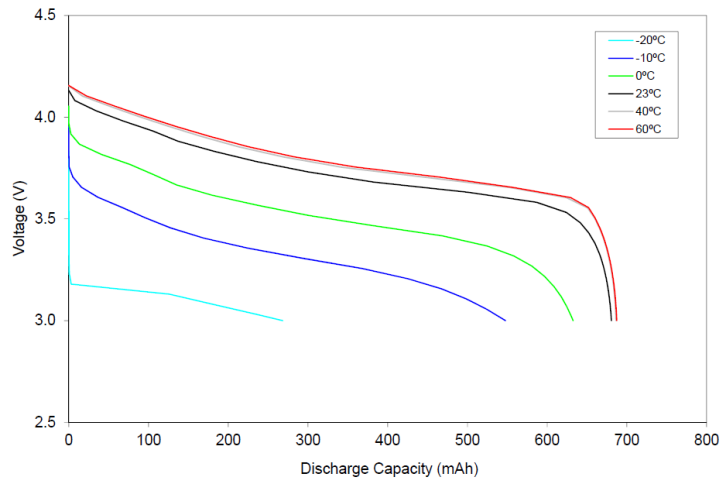


## LPP 463149 S Cycling at 20°C

### Test Conditions:

a) Capacity  
charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V)  
discharge (1.0C; UEOD = 3.0V)  
Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles

b) Impedance measurements before and after cycling reference impedance according to specification of cell.

c) Thickness measurement before and after cycling reference thickness according to specification of cell

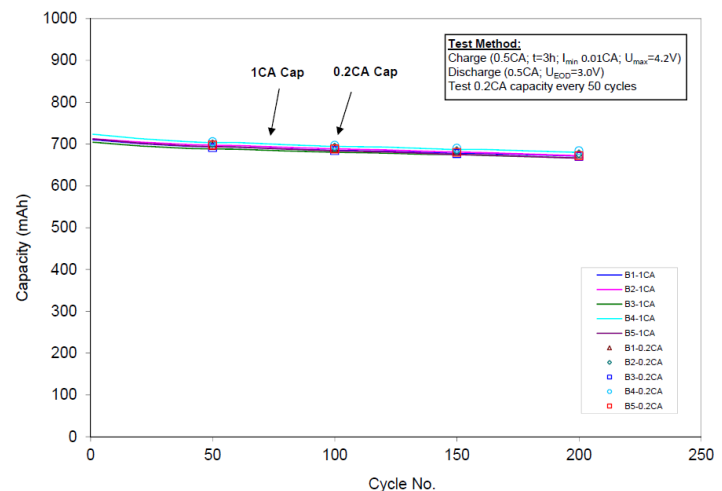

# Facts and Figures

## LPP 503562 S

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 1200 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 1150 mAh
- Impedance Initial ▶  $\leq 55 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 500 cycles for  $\geq 70 \%$

### BATTERY


- Length (l) ▶ 60.0 mm (max.)
- Width (w) ▶ 35.0 mm (max.)
- Height (h) ▶ 4.65 mm (max.)
- Weight, approx. ▶ 22.0 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20 V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 575 mA
- ▶ Rapid Charge: 1150 mA
- Charging Cut-Off (a) or (b)
  - a) by time ▶ Standard Charge: 3.5 h
  - ▶ Rapid Charge: 2.5 h
  - b) by min. current ▶ 11.5 mA
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 2300 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C
- ▶ Discharge: -10°C to +60°C
- Storage Temperature ▶ 1 Month at -20°C to +45°C >90%
- Capacity Recovery Rate ▶ 3 Month at -20°C to +45°C >80%
- ▶ 1 Year at -20°C to +30°C >80%

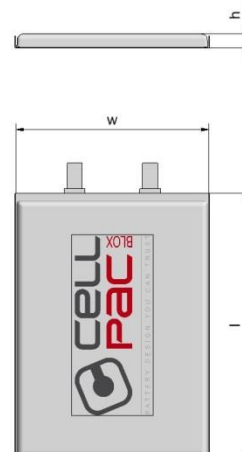

CONFIGURATIONS	1S1P	1S2P sbs *	2S1P sbs *	2S1P stack
Minimal Capacity	1200 mAh	2400 mAh	1200 mAh	1200 mAh
Nominal Voltage	3.70 V	3.70 V	7.40 V	7.40 V
Watt-Hour Rating	4.44 Wh	8.88 Wh	8.88 Wh	8.88 Wh
Charge Temperature	0 to +45°C	0 to +45°C	0 to +45°C	0 to +45°C
Discharge Temperature	-10 to +60°C	-10 to +60°C	-10 to +60°C	-10 to +60°C
Overcharge Detection	4.275 V $\pm$ 25 mV	4.275 V $\pm$ 25 mV	4.325 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.3 V $\pm$ 58 mV	2.3 V $\pm$ 58 mV	2.2 V $\pm$ 50 mV	2.4 V $\pm$ 50 mV
Overcurrent Detection	2A - 4A	2A - 4A	3.5A - 8A	2.7A - 5.5A
NTC	10k B=3380k	10k B=3380k	10k B=3380k	10k B=3380k
MOQ/ MDQ	30.000	15.000	15.000	15.000
Order Reference Number	CPB 3019	CPB 3020	CPB 3021	CPB 3022

\* sbs – denotes cells will be side by side

# Discharge Characteristics


## LPP 503562 S Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C;  $t_{max} = 3h$ ;  $I_{min} = 0.02C$ ; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C;  $t_{max} = 3h$ ;  $I_{min} = 0.02C$ ; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

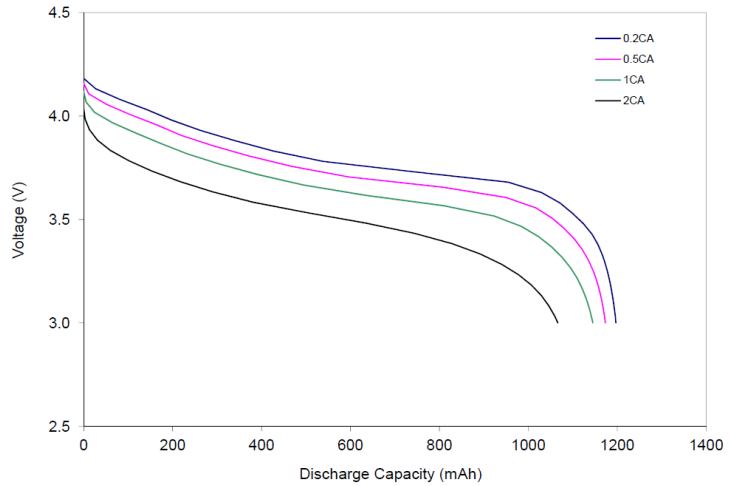


## LPP 503562 S Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C;  $t = 3h$ ;  $I_{min} 0.02C$ ;  
 $U_{max} = 4.2V$  at room temperature)  
4h rest at the below mentioned temperatures

Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

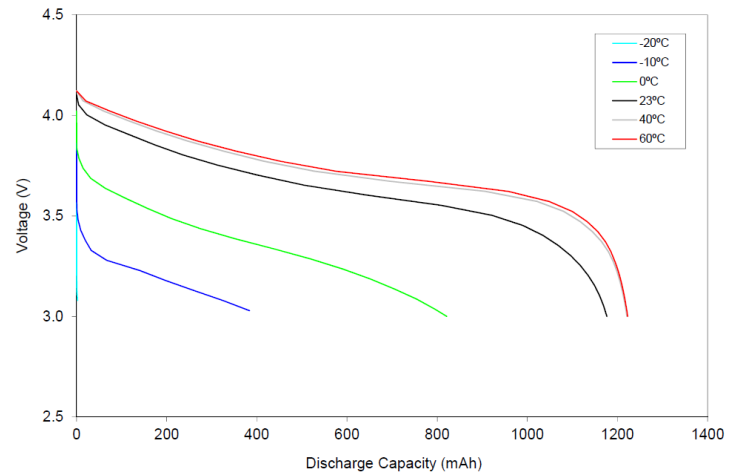


## LPP 503562 S Cycling at 20°C

### Test Conditions:

a) Capacity  
charge (1.0C;  $t = 3h$ ;  $I_{min} 0.02C$ ;  $U_{max} = 4.2V$ )  
discharge (1.0C; UEOD = 3.0V)  
Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles

b) Impedance measurements before and after cycling reference impedance according to specification of cell.

c) Thickness measurement before and after cycling reference thickness according to specification of cell

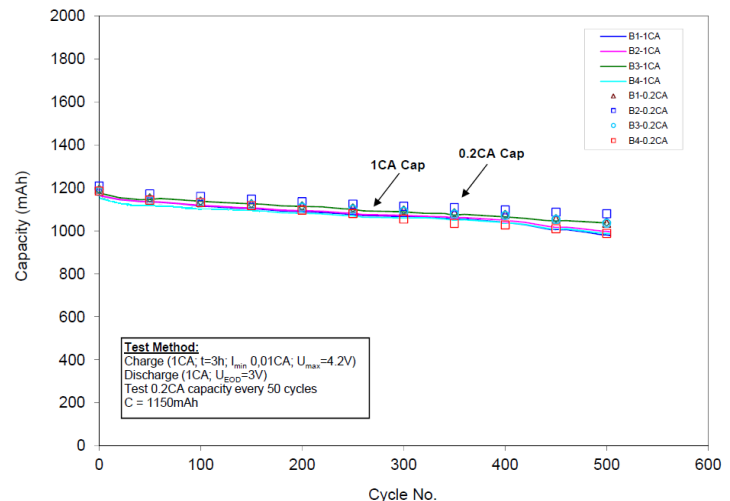

# Facts and Figures

## LPP 503759 8HH

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 1400 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 1320 mAh
- Impedance Initial ▶  $\leq 70 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 500 cycles for  $\geq 80 \%$

### BATTERY


- Length (l) ▶ 59.0 mm (max.)
- Width (w) ▶ 37.0 mm (max.)
- Height (h) ▶ 5.1 mm (max.)
- Weight, approx. ▶ 24.6 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 1320 mA  
Rapid Charge: 1980 mA
- Charging Cut-Off (a) or (b)  
a) by time ▶ Standard Charge: 5 h  
Rapid Charge: 2.5 h
- b) by min. current ▶ 50 mA
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 2640 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C  
Discharge: -20°C to +60°C
- Storage Temperature ▶ 1 Month at -10°C to +45°C >85%
- Capacity Recovery Rate

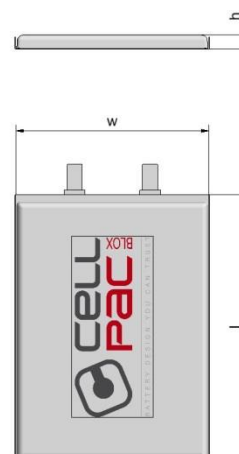

CONFIGURATIONS	1S1P	1S2P sbs *	2S1P sbs *	2S1P stack
Minimal Capacity	1400 mAh	2800 mAh	1400 mAh	1400 mAh
Nominal Voltage	3.70 V	3.70 V	7.40 V	7.40 V
Watt-Hour Rating	5.18 Wh	10.36 Wh	10.36 Wh	10.36 Wh
Charge Temperature	0 to +45°C	0 to +45°C	0 to +45°C	0 to +45°C
Discharge Temperature	-20 to +60°C	-20 to +60°C	-20 to +60°C	-20 to +60°C
Overcharge Detection	4.275 V $\pm$ 25 mV	4.275 V $\pm$ 25 mV	4.325 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.3 V $\pm$ 58 mV	2.3 V $\pm$ 58 mV	2.2 V $\pm$ 50 mV	2.4 V $\pm$ 50 mV
Overcurrent Detection	2A - 4A	2A - 4A	3.5A - 8A	2.7A - 5.5A
NTC	10k B=3380k	10k B=3380k	10k B=3380k	10k B=3380k
MOQ/ MDQ	5.000	5.000	5.000	5.000
Order Reference Number	CPB 3023	CPB 3024	CPB 3025	CPB 3026

\* sbs – denotes cells will be side by side

# Discharge Characteristics


## LPP 503759 8HH Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

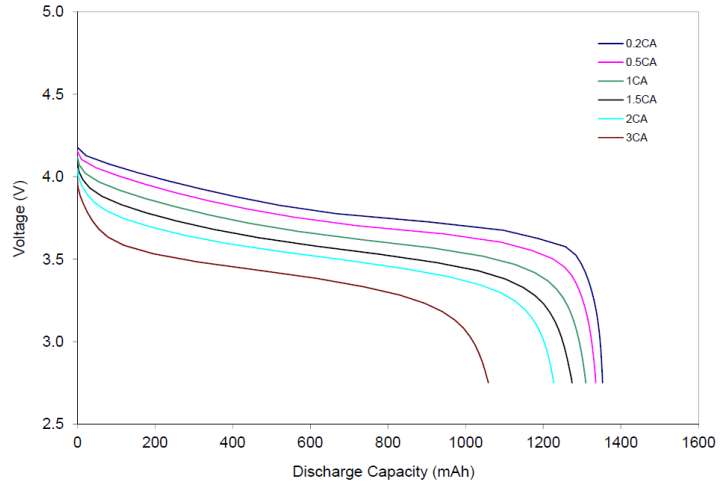


## LPP 503759 8HH Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V at room temperature)  
4h rest at the below mentioned temperatures

Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

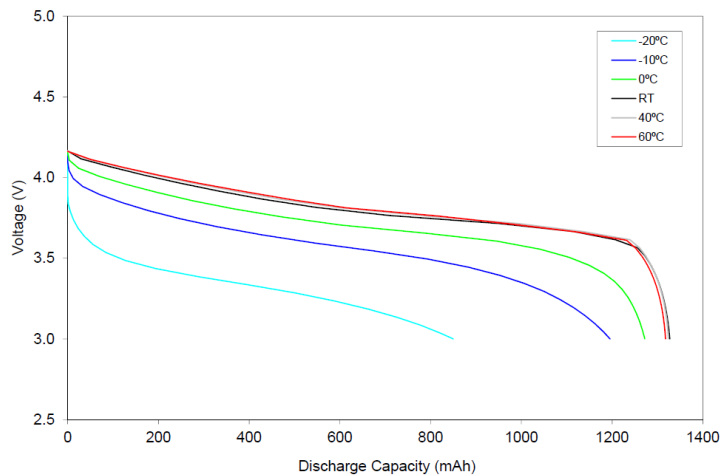


## LPP 503759 8HH Cycling at 20°C

### Test Conditions:

a) Capacity charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V)  
discharge (1.0C; UEOD = 3.0V)  
Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles

b) Impedance measurements before and after cycling reference impedance according to specification of cell.

c) Thickness measurement before and after cycling reference thickness according to specification of cell

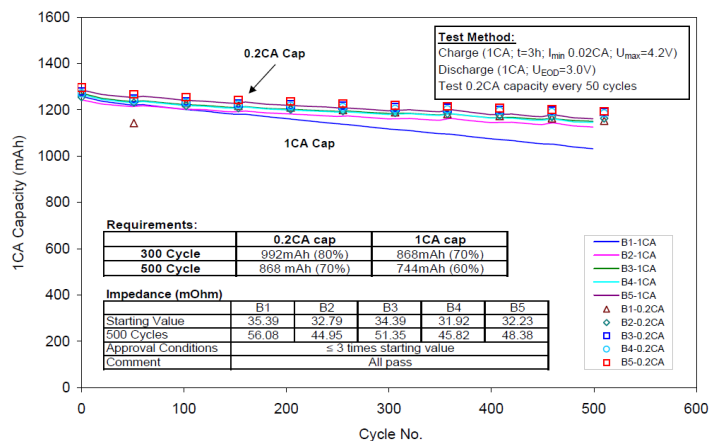


# Facts and Figures

## LPP 523450 S

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 1000 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 950 mAh
- Impedance Initial ▶  $\leq 60 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 500 cycles for  $\geq 80 \%$

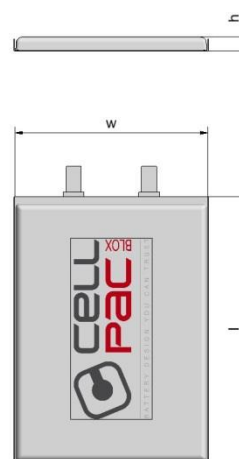

### BATTERY

- Length (l) ▶ 50.5 mm (max.)
- Width (w) ▶ 35.5 mm (max.)
- Height (h) ▶ 5.2 mm (max.)
- Weight, approx. ▶ 19.0 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 500 mA
- ▶ Rapid Charge: 1000 mA
- Charging Cut-Off (a) or (b)
  - a) by time ▶ Standard Charge: 3.5 h
  - ▶ Rapid Charge: 2.0 h
  - b) by min. current ▶ 10 mA
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 2000 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C
- ▶ Discharge: -10°C to +60°C
- Storage Temperature ▶ 1 Month at -20°C to +60°C >80%
- Capacity Recovery Rate ▶ 3 Month at -20°C to +45°C >80%
- ▶ 1 Year at -20°C to +30°C >80%

CONFIGURATIONS	1S1P	1S2P sbs *	2S1P sbs *	2S1P stack
Minimal Capacity	1000 mAh	2000 mAh	1000 mAh	1000 mAh
Nominal Voltage	3.70 V	3.70 V	7.40 V	7.40 V
Watt-Hour Rating	3.70 Wh	7.40 Wh	7.40 Wh	7.40 Wh
Charge Temperature	0 to +45°C	0 to +45°C	0 to +45°C	0 to +45°C
Discharge Temperature	-10 to +60°C	-10 to +60°C	-10 to +60°C	-10 to +60°C
Overcharge Detection	4.275 V $\pm$ 25 mV	4.275 V $\pm$ 25 mV	4.325 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.3 V $\pm$ 58 mV	2.3 V $\pm$ 58 mV	2.2 V $\pm$ 50 mV	2.4 V $\pm$ 50 mV
Overcurrent Detection	2A - 4A	2A - 4A	3.5A - 8A	2.7A - 5.5A
NTC	10k B=3380k	10k B=3380k	10k B=3380k	10k B=3380k
MOQ/ MDQ	<b>30.000</b>	<b>15.000</b>	<b>15.000</b>	<b>15.000</b>
Order Reference Number	<b>CPB 3027</b>	<b>CPB 3028</b>	<b>CPB 3029</b>	<b>CPB 3030</b>

\* sbs – denotes cells will be side by side

# Discharge Characteristics


## LPP 523450 S Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C;  $t_{max} = 3h$ ;  $I_{min} = 0.02C$ ; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C;  $t_{max} = 3h$ ;  $I_{min} = 0.02C$ ; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

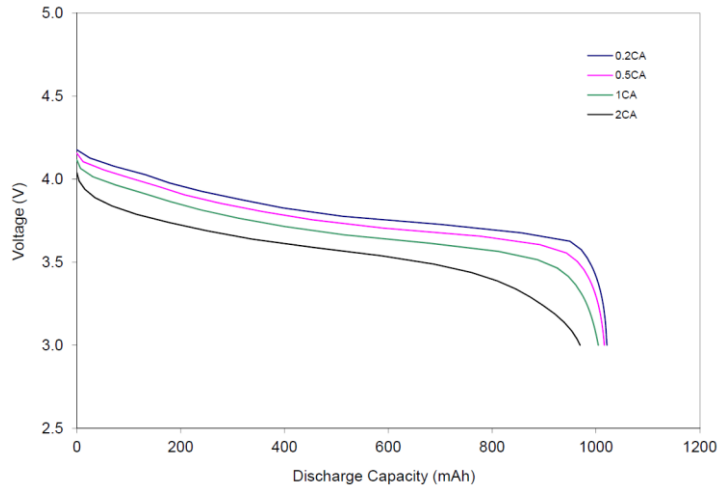


## LPP 523450 S Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C;  $t = 3h$ ;  $I_{min} 0.02C$ ;  
 $U_{max} = 4.2V$  at room temperature)  
4h rest at the below mentioned temperatures


Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

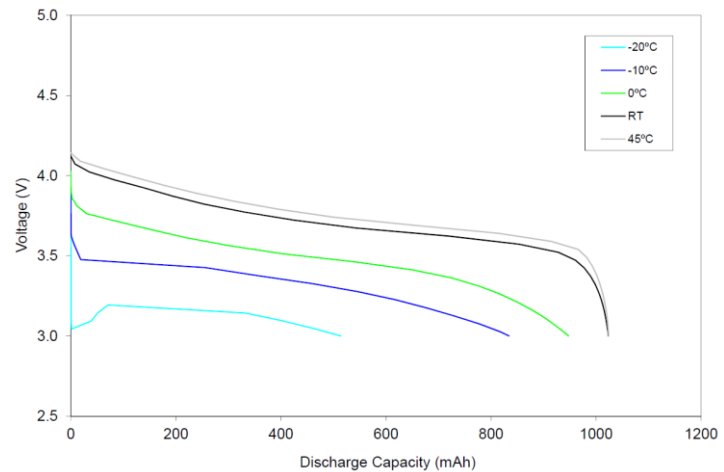

## LPP 523450 S Cycling at 20°C

### Test Conditions:

- Capacity charge (1.0C;  $t = 3h$ ;  $I_{min} 0.02C$ ;  $U_{max} = 4.2V$ )  
discharge (1.0C; UEOD = 3.0V)  
Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles
- Impedance measurements before and after cycling reference impedance according to specification of cell.
- Thickness measurement before and after cycling reference thickness according to specification of cell

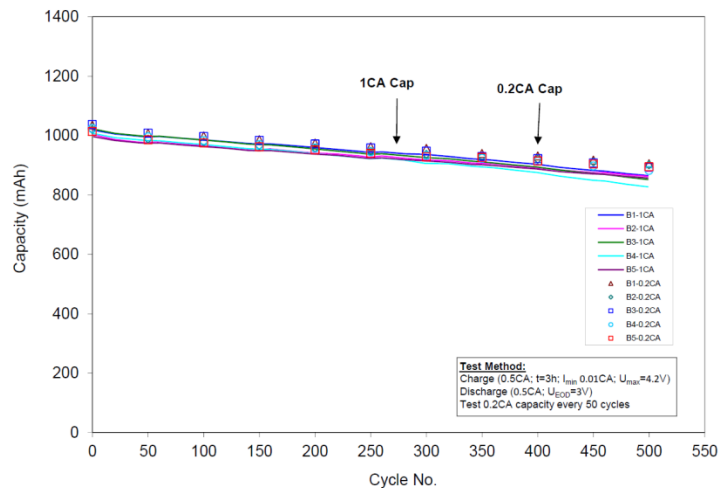

# Facts and Figures

## LPP 683566 BE

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 1880 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 1820 mAh
- Impedance Initial ▶  $\leq 80 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 400 cycles for  $\geq 75 \%$

### BATTERY


- Length (l) ▶ 65.85 mm (max.)
- Width (w) ▶ 35.0 mm (max.)
- Height (h) ▶ 6.8 mm (max.)
- Weight, approx. ▶ 40.0 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 910 mA
- ▶ Rapid Charge: 1820 mA
- Charging Cut-Off (a) or (b)
  - a) by time ▶ Standard Charge: 5 h
  - ▶ Rapid Charge: 2.5 h
  - b) by min. current ▶ 20 mA
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 3640 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C
- ▶ Discharge: -20°C to +60°C
- Storage Temperature ▶ 1 Month at -20°C to +60°C >85%
- Capacity Recovery Rate

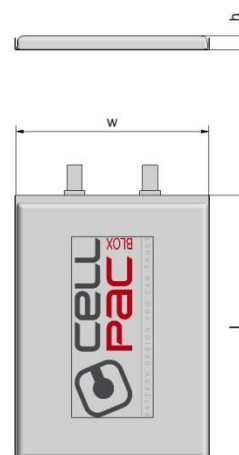

CONFIGURATIONS	1S1P	2S1P stack
Minimal Capacity	1880 mAh	1880 mAh
Nominal Voltage	3.70 V	7.40 V
Watt-Hour Rating	6.96 Wh	13.91 Wh
Charge Temperature	0 to +45°C	0 to +45°C
Discharge Temperature	-20 to +60°C	-20 to +60°C
Overcharge Detection	4.275 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.3 V $\pm$ 58 mV	2.4 V $\pm$ 50 mV
Overcurrent Detection	2A - 4A	2.7A - 5.5A
NTC	10k B=3380k	10k B=3380k
MOQ/ MDQ	<b>50.000</b>	<b>25.000</b>
Order Reference Number	<b>CPB 3031</b>	<b>CPB 3032</b>

# Discharge Characteristics


## LPP 683566 BE Discharge Profile

### Test Conditions:

1 – 3 cycles Charge 1.0C; tmax = 3h; Imin = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle Charge 1.0C; tmax = 3h; Imin = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

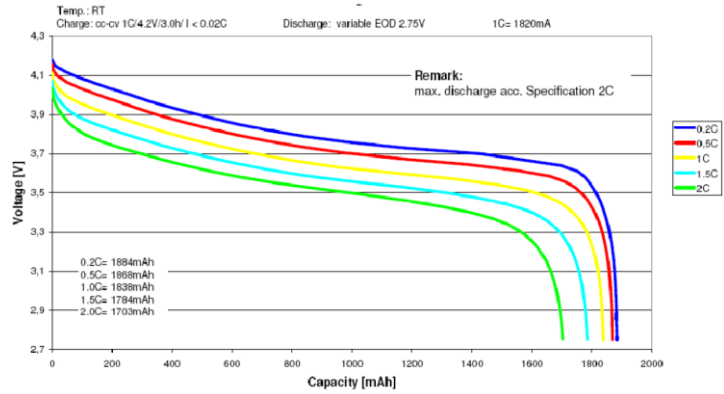


## LPP 683566 BE Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C; t = 3h; Imin 0.02C; Umax = 4.2V at room temperature)  
4h rest at the below mentioned temperatures


Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

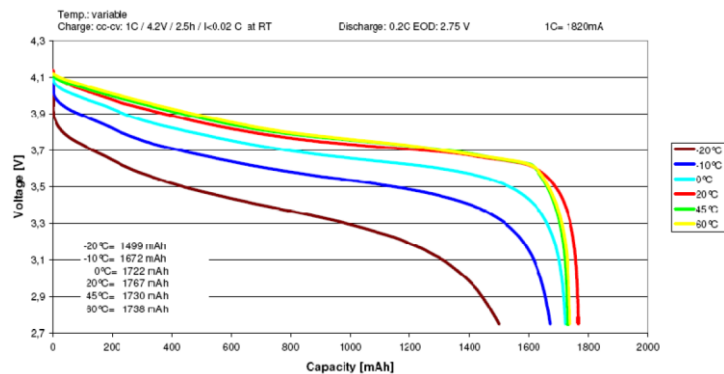

## LPP 683566 BE Cycling at 20°C

### Test Conditions:

- Capacity charge (1.0C; t = 3h; Imin 0.02C; Umax = 4.2V)  
discharge (1.0C; UEOD = 3.0V)  
Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles
- Impedance measurements before and after cycling reference impedance according to specification of cell.
- Thickness measurement before and after cycling reference thickness according to specification of cell

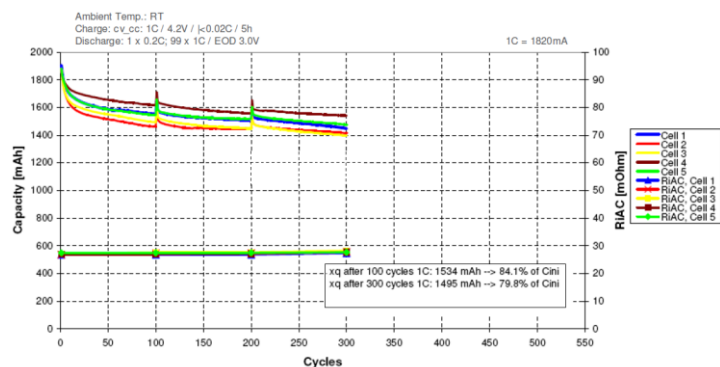

# Facts and Figures

## LPP 702035 S

### SYSTEM

- System ▶ Li-Ion
- Recognition ▶ UL 1642
- Nominal Voltage ▶ 3.7 V
- Nominal Capacity, C ▶ 430 mAh (at 0.2C and 20°C)
- Minimum Capacity ▶ 420 mAh
- Impedance Initial ▶  $\leq 100 \text{ m}\Omega$  @ 1kHz at 4.2V
- Life Expectancy ▶ 500 cycles for  $\geq 80 \%$

### BATTERY


- Length (l) ▶ 33.5 mm (max.)
- Width (w) ▶ 20.5 mm (max.)
- Height (h) ▶ 7.0 mm (max.)
- Weight, approx. ▶ 9.0 g

### FUNCTION

- Charging Method ▶ Constant Current + Constant Voltage
- Charge Voltage ▶ 4.20V ( $\pm 50\text{mV}$ )
- Initial Charge Current ▶ Standard Charge: 210 mA
- ▶ Rapid Charge: 420 mA
- Charging Cut-Off (a) or (b)
  - a) by time ▶ Standard Charge: 3.5 h
  - ▶ Rapid Charge: 2.0 h
  - b) by min. current ▶ 4.2 mA
- Discharge Cut-Off voltage ▶ 3.0 V
- Max. Continuous Discharge Current ▶ 420 mA

### DATA CONNECTION

- Operating Temperature ▶ Charge: 0°C to +45°C
- ▶ Discharge: -10°C to +60°C
- Storage Temperature ▶ 1 Month at -20°C to +60°C >80%
- Capacity Recovery Rate ▶ 3 Month at -20°C to +45°C >80%
- ▶ 1 Year at -20°C to +30°C >80%

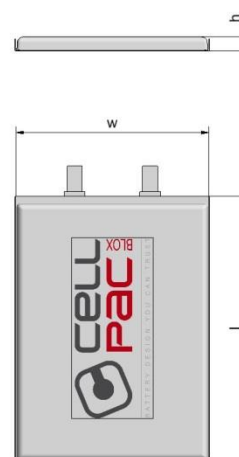

CONFIGURATIONS	1S1P	1S2P stack
Minimal Capacity	430 mAh	860 mAh
Nominal Voltage	3.70 V	3.70 V
Watt-Hour Rating	1.59 Wh	3.18 Wh
Charge Temperature	0 to +45°C	0 to +45°C
Discharge Temperature	-10 to +60°C	-10 to +60°C
Overcharge Detection	4.28 V $\pm$ 25 mV	4.28 V $\pm$ 25 mV
Overdischarge Detection	2.8 V $\pm$ 50 mV	2.8 V $\pm$ 50 mV
Overcurrent Detection	1.2A - 4A	1.2A - 4A
NTC	10k B=3435k	10k B=3435k
MOQ/ MDQ	<b>30.000</b>	<b>15.000</b>
Order Reference Number	<b>CPB 3033</b>	<b>CPB 3034</b>

# Discharge Characteristics


## LPP 702035 S Discharge Profile

### Test Conditions:

1 – 3 cycles    Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 1.0C  
UEOD = 3.0V

2 – 1 cycle    Charge 1.0C; t<sub>max</sub> = 3h; I<sub>min</sub> = 0.02C; 4.2V  
Discharge 0.2C  
UEOD = 3.0V

Maximum Discharge Current taken from the product specification

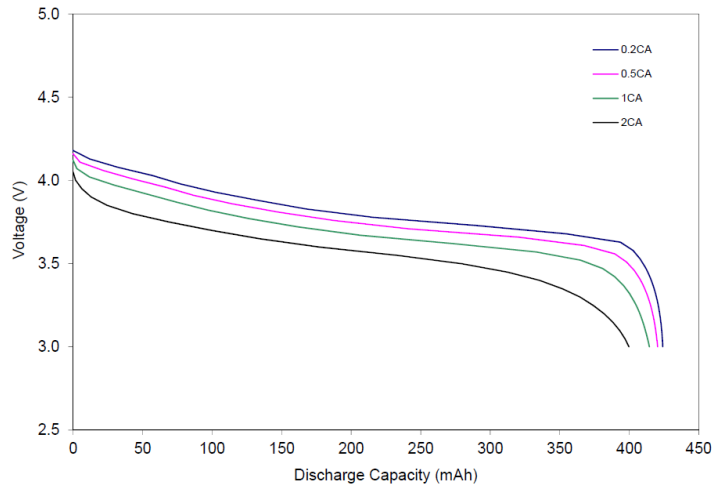


## LPP 702035 S Temperature Profile @ 1C/ 0.2C

### Test Conditions:

Charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V at room temperature)  
4h rest at the below mentioned temperatures

Discharge (0.2C; UEOD = 3.0V) at the following temperatures:  
60°C, 40°C, RT, 0°C, -10°C, -20°C  
Starting with 0.2C at -20°C; always charging at RT after 4h rest time

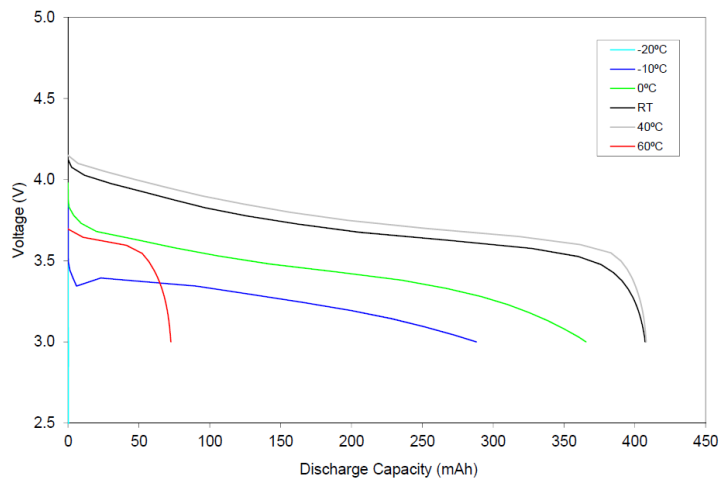


## LPP 702035 S Cycling at 20°C

### Test Conditions:

a) Capacity charge (1.0C; t = 3h; I<sub>min</sub> 0.02C; U<sub>max</sub> = 4.2V) discharge (1.0C; UEOD = 3.0V) Determination of the 0.2C capacity (discharge 0.2C; UEOD = 3.0V) after charging each 50 cycles

b) Impedance measurements before and after cycling reference impedance according to specification of cell.

c) Thickness measurement before and after cycling reference thickness according to specification of cell

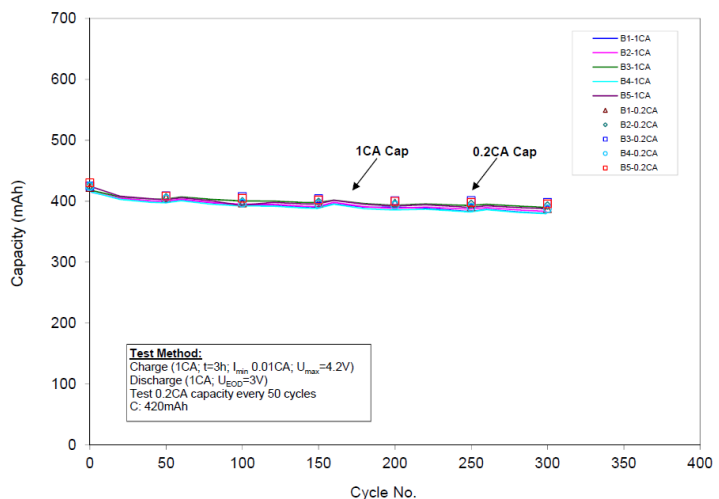

## 6. Design Tips for VARTA CellPac BLOX Battery Packs

In general, we strongly recommend for any design-in to consult the sales engineer of the distributing company. For applications with special requirements or environments which go beyond the specified conditions, CellPac BLOX batteries will not be suitable.

To support your own design-in process, we offer the following tips, to help avoid the most common issues which can occur:

1. A lithium rechargeable battery is a “living” product combining mechanical, electrical and chemical engineering disciplines. Its performance is highly dependent on how it is treated, as shown in the technical data within this handbook. The limitation of our own data is that it is generic and therefore in most cases only indicative of reality. **For CellPac BLOX batteries you will get samples to test its performance specifically for your application before finalizing your design and moving to mass production.**

2. For pouch-cell battery designs, it is important to take good care of the case during handling or installation. The cavity should not contain any protrusions which may dent or pressure the pouch surface and should be big enough to contain the cell with room for a little swelling over lifetime (0.1-0.2mm per cell, unless stated on the Product Information Sheet).

3. To secure pouch cells comfortably, especially in cases of too much space, a suitably-sized adhesive pad secured inside the battery cavity is recommended to a good fit.

4. It's important to be aware of any standby-mode or continuous-drain which your application may put on the battery (e.g. clock, memory or data functions), especially with respect to avoiding over-discharge. Some batteries may have relatively low charge on arrival or at the time of installation to your devices. Long-term storage without re-charging, especially after full discharge of your application, may risk bringing the battery into “deep-discharge” at a very low voltage below 3.0V. This can cause long-term performance problems, swelling and in very extreme cases, lithium plating within the cell. A half-charge is an ideal condition for storage in general, but if your application does drain the battery in standby or “off” modes, the storage lifetime should be calculated and managed.

5. Avoid extreme or tight bending of wires, especially at the connector point or where the wires are soldered to the battery electronics.

6. The safety electronics of the PCM included in the battery are intended as a final safety function. They should not be relied upon within the application design to control the application behaviour. The electronics within the application design and charger design should normally control all functions of the application without any trigger to the battery safety functions. The battery safety functions are intended to intervene in the event of a failure of the normal electronics function of the application and/or charger.


7. For installation of pouch cells, especially designs with no connector, take special care to consider the installation process. Dropping cells directly onto hard surfaces may damage them and cause swelling over time. If cells are dropped before installation, it is generally recommended that they are removed from your production and not installed. Soldering processes should not be done too close to the PCM or pouch to avoid any risk of heat damage. For example, to trim wires down to a very short length would bring the solder point very close to critical components. The safety function of the PCM could be compromised or the cell itself could become damaged.

8. Sharp ribs or corners within the cavity should be avoided where possible. In a scenario where your application may be dropped (a high risk for handheld devices especially), these can cut into the cell during impact.

## Charging

Fast charging (CC/CV charging) can be achieved in a temperature range of 0 ... +45°C. The current of charging needs to be limited to individual specification of the battery selected. Limiting factors may be the PCM, wire connector assembly or the cell itself. In order to avoid overcharging along with damaging the battery or even hazardous situations, the charging voltage has to be limited strictly to 4.2 V per cell, see the individual specification for your battery choice for the most in detail information. It is recommended to terminate the charging either after 3hrs and/or after the charging current falls below 0.02 C.

The charging process is illustrated below showing current and voltage of a LPP 443441 S battery using 1 C I/V – charging.

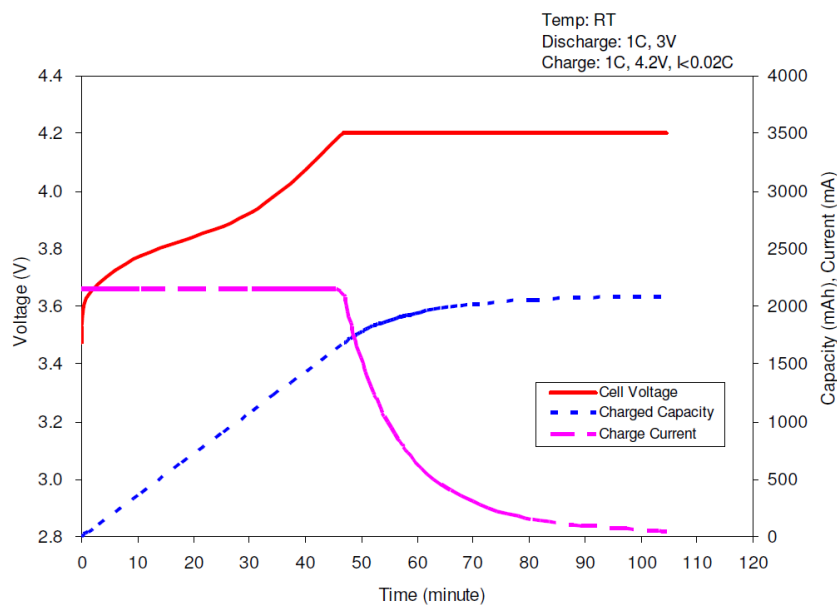


### Cell charging characteristics

## Discharging

Since all CellPac BLOX batteries are delivered with a safety-circuit, the max. current rating established in the specification must be observed. There are two levels of overcurrent protection of which the first one will lead to a reversible interruption of current supply, while exceeding the second level will make the battery unusable permanently.

Please see the individual Product Information sheets for details of the safety parameters built into our modules which are set differently depending on the type designation.

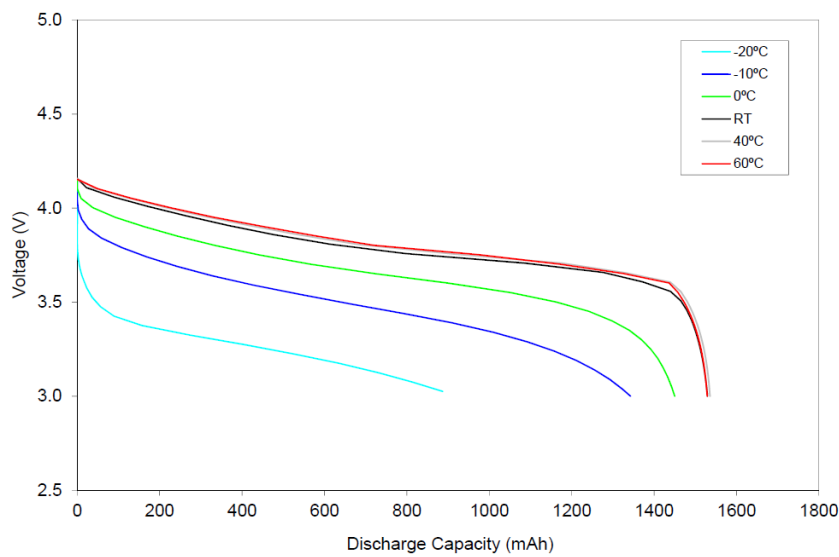


**Typical discharge curves with different temperatures as parameter**

## 7. Reliability and Life Expectancy

VARTA CellPac BLOX batteries combine maximum safety with top-performance and reliability.

Cycle life is expected to be 300-500 cycles with a remaining capacity of 70% - 80%, depending on exact model.

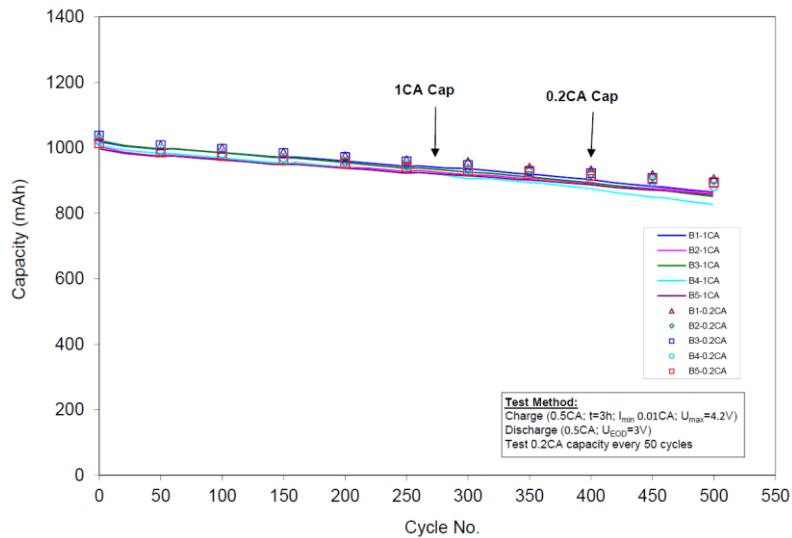

Typical cycle-life at room temperature (20°C) LPP 523450 S

## 8. Safety

All CellPac BLOX batteries are equipped with an electronic module for protection against malfunction of charging and discharging, misuse and abuse. Moreover, cells are selected which provide the best of performance data combined with excellent inherent safety features for usage within reasonable boundaries of specifications. To cope with any foreseeable abuse of our batteries, we have implemented a number of safety criteria which are usually multi-redundant when implemented together with a carefully designed application device and related charging circuitry in particular.

It is VARTA Storage policy to have all new cells tested and listed/recognized by UL (a worldwide acting, non-profit organisation in the field of consumer safety protection), according to the standard UL 1642. Relevant testing requirements, which represent to us the minimum level of safety testing, are given in the following table:

Test	Description	Required results
<b>Abnormal Charging Test</b>	<ul style="list-style-type: none"> <li>▶ Charging Current I: 3 times max. allowed charging current</li> <li>▶ Charging Voltage U: CellPac BLOX cells: 4.8 V</li> <li>▶ Charging Time t: <math>t = 2.5 C / I</math>, (Current in CA) – at open voltage</li> <li>▶ <math>t = 12 \text{ h}</math> – at limited charging voltage (manufacturer specification)</li> <li>▶ If necessary additional safety elements according to UL file</li> </ul> <p><u>Testing Conditions:</u></p> <ul style="list-style-type: none"> <li>▶ Test at RT</li> <li>▶ Cell in discharged state (3.0 V after 1.0 C discharge)</li> <li>▶ An integrated overcurrent or over temperature safety element is not allowed to be activated (the maximum load has to be chosen)</li> <li>▶ The cell will be connected in series with a direct current source and a charging current is applied</li> </ul>	no bursting, no fire
<b>Short Circuit Test</b>	<p><u>Testing Conditions:</u></p> <ul style="list-style-type: none"> <li>▶ Test at RT</li> <li>▶ Cell used in charged state (3 h with 1.0 CA to 4.2 V, <math>I_{\text{min}} 0.02 \text{ C}</math>)</li> <li>▶ Cell is shortened in the test with a maximum resistance of 100 mOhm (to be documented)</li> </ul>	no bursting, no fire Max. temperature 150°C
<b>Voltage Reversal Charge Test</b> (according to UN Manual 38.	<p><u>Testing Conditions:</u></p> <ul style="list-style-type: none"> <li>▶ Test at RT</li> <li>▶ Cell in discharged state (3.0 V after 1.0 C discharge)</li> <li>▶ - 1 C; 12 V until cell temperature is back at RT (<math>t_{\text{max}} = 1 \text{ h}</math>)</li> </ul>	no bursting, no fire Max. temperature 75°C
<b>Heating Test</b>	<p><u>Testing Conditions:</u></p> <ul style="list-style-type: none"> <li>▶ Charge conditions: cell fully charged (according to UL 164</li> <li>▶ 3h / 4.25 V (1 C)</li> <li>▶ Heating of the cell in the temperature box to 130°C (D 5°C/min +/- 2°C)</li> <li>▶ - 10 minutes holding time at 130°C</li> </ul>	no fire, no rupture

## 9. Storage

Where possible, storage under fully charged state (CC/CV 4.2V, 3h) should be avoided to maximize longevity. Trickle charge, common in aqueous battery systems (Ni-Cd, Ni-MH), is strictly forbidden to avoid performance issues and safety concerns.

## 10. Transportation of VARTA CellPac BLOX Batteries

Rechargeable lithium ion batteries manufactured by VARTA Storage are considered to be UN 3480 Lithium Ion Batteries, and are tested according to 38.3 of the “UN Manual of Tests and Criteria” for compliance with the requirements of special provisions ADR 188, IMDG 188, DOT / 49 CFR § 173.102, and the requirements of IATA DGR packing instruction 965. Positive test results as well as other relevant information required for transportation are stated in dedicated “Declarations of Conformity”.

Onward transportation of CellPac BLOX batteries in original VARTA packaging is permitted provided the shipment is made in accordance with the transport rules in force at the time of shipping. Repackaging and onward shipment should only be done by trained personnel in accordance with the latest transportation regulations in force and is the sole responsibility of the shipping party.

## 10. Proper Use and Handling

For proper use and handling please refer to the latest VARTA Handling Precautions supplied with your batteries or under following links:

[Handling Precautions Cylindrical & Prismatic](#)

[Handling Precautions Polymer Pouch](#)