


# Precision Display Socket 2,54 mm

Series

**218**

Product group  
**1**




Rated current	3,0 A
Rated voltage	150 VRMS / VDC
Withstand voltage	1000 VRMS for one minute
Material contact	Copper alloy
Material clip	BeCu
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-55°C to +125°C
Max. soldering temper.	260°C for 10 seconds

pitch	<b>2,54</b>
termination	
mating pin size	ø <b>0,40-0,56</b> □ <b>0,25x0,45</b>
max. pincount	<b>040</b>

All dimensions in mm.

## Variation

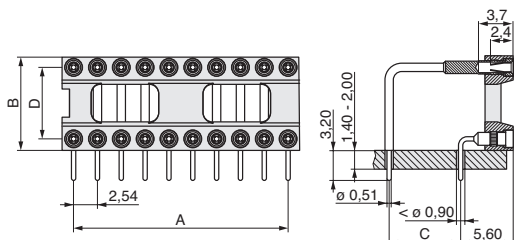


1

	no. of contacts	row distance (code)	row distance (mm)	see figure left	see figure left	see figure left
	n		D	A	B	C
006	3		7,62	7,54	10,08	7,62
008	3		7,62	10,08	10,08	7,62
010	2		5,08	12,62	7,60	5,08
010	3		7,62	12,62	10,08	7,62
014	3		7,62	17,70	10,08	7,62
016	3		7,62	20,24	10,08	7,62
018	3		7,62	22,78	10,08	7,62
020	3		7,62	25,32	10,08	7,62
024	3		7,62	30,40	10,08	7,62
024	6		15,24	30,40	17,70	7,62
028	6		15,24	35,48	17,70	7,62
032	6		15,24	40,56	17,70	7,62
040	6		15,24	50,72	17,70	7,62

Clip style:  
S = 4 finger clip

Plating:  
T = Sn  
F = Au  
H = Au 0,75 μ

Packaging:  
T = Tube

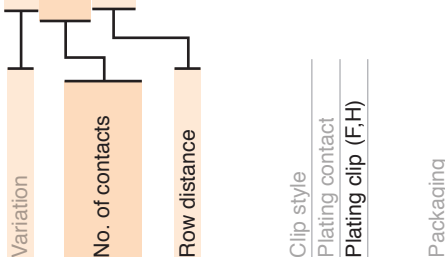

Order code:

**218-1-1-??-?-X0ST?-XT0**

MPE-Garry GmbH • Schafflerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de