
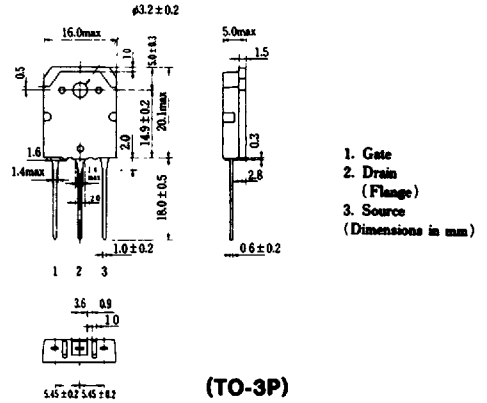


## SILICON N-CANNEL MOS FET

### HIGH SPEED POWER SWITCHING

#### FEATURES

- Low On-Resistance
- High Speed Switching
- Low Drive Current
- No Secondary Breakdown
- Suitable for Switching Regulator and DC-DC Converter




(TO-3P)

#### ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

Item	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DSS}$	900	V
Gate-Source Voltage	$V_{GSS}$	$\pm 20$	V
Drain Current	$I_D$	3	A
Drain Peak Current	$I_{D(pulse)}$ *	7	A
Body-Drain Diode Reverse Drain Current	$I_{DR}$	3	A
Channel Dissipation	$P_{ch}$ **	80	W
Channel Temperature	$T_{ch}$	150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	$-55 \sim +150$	$^\circ\text{C}$

\*  $PW \leq 10\mu\text{s}$ , duty cycle  $\leq 1\%$   
\*\* Value at  $T_c=25^\circ\text{C}$

#### POWER VS. TEMPERATURE DERATING

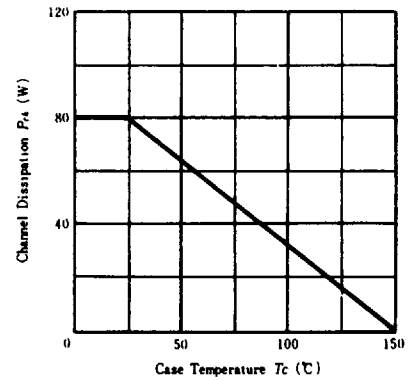


#### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

Item	Symbol	Test Condition	min.	typ.	max.	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D=10\text{mA}$ , $V_{GS}=0$	900	—	—	V
Gate-Source Breakdown Voltage	$V_{(BR)GSS}$	$I_G=\pm 100\mu\text{A}$ , $V_{DS}=0$	$\pm 20$	—	—	V
Gate-Source Leak Current	$I_{GSS}$	$V_{GS}=\pm 16\text{V}$ , $V_{DS}=0$	—	—	$\pm 10$	$\mu\text{A}$
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=720\text{V}$ , $V_{GS}=0$	—	—	250	$\mu\text{A}$
Gate-Source Cutoff Voltage	$V_{GS(off)}$	$I_D=1\text{mA}$ , $V_{DS}=10\text{V}$	2.0	—	4.0	V
Static Drain-Source on State Resistance	$R_{DS(on)}$	$I_D=1.5\text{A}$ , $V_{GS}=10\text{V}^*$	—	5.0	7.0	$\Omega$
Forward Transfer Admittance	$ y_{fs} $	$I_D=2\text{A}$ , $V_{DS}=20\text{V}^*$	0.85	1.4	—	S
Input Capacitance	$C_{iss}$	$V_{DS}=10\text{V}$ , $V_{GS}=0$ , $f=1\text{MHz}$	—	490	—	pF
Output Capacitance	$C_{oss}$		—	260	—	pF
Reverse Transfer Capacitance	$C_{rss}$		—	190	—	pF
Turn-On Delay Time	$t_{d(on)}$	$I_D=2\text{A}$ , $V_{GS}=10\text{V}$ , $R_L=15\Omega$	—	10	—	ns
Rise Time	$t_r$		—	70	—	ns
Turn-Off Delay Time	$t_{d(off)}$		—	60	—	ns
Fall Time	$t_f$		—	60	—	ns
Body-Drain Diode Forward Voltage	$V_{DF}$	$I_F=3\text{A}$ , $V_{GS}=0$	—	0.95	—	V
Body-Drain Diode Reverse Recovery Time	$t_{rr}$	$I_F=3\text{A}$ , $V_{GS}=0$ , $di_F/dt=100\text{A}/\mu\text{s}$	—	900	—	ns


\* Pulse Test

HITACHI/(OPTOELECTRONICS)


MAXIMUM SAFE OPERATION AREA

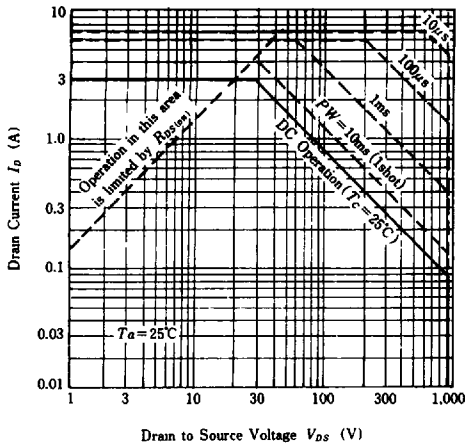


TYPICAL OUTPUT CHARACTERISTICS

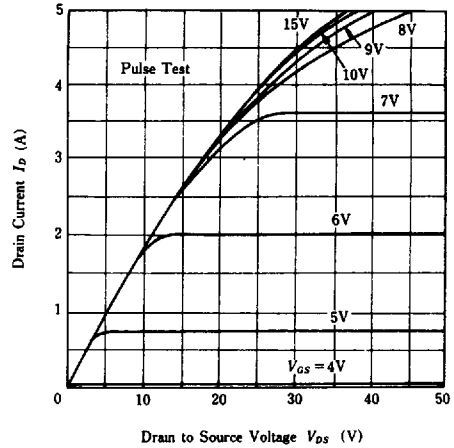


TYPICAL TRANSFER CHARACTERISTICS

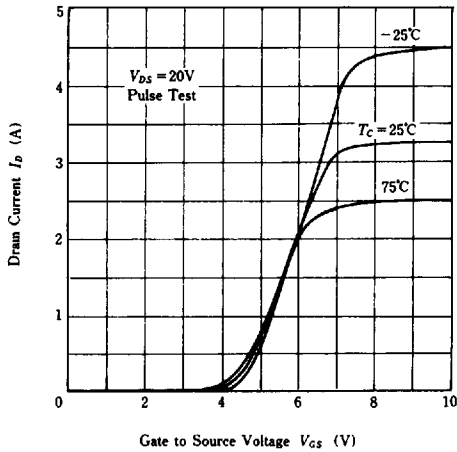


DRAIN-SOURCE SATURATION VOLTAGE VS. GATE-SOURCE VOLTAGE

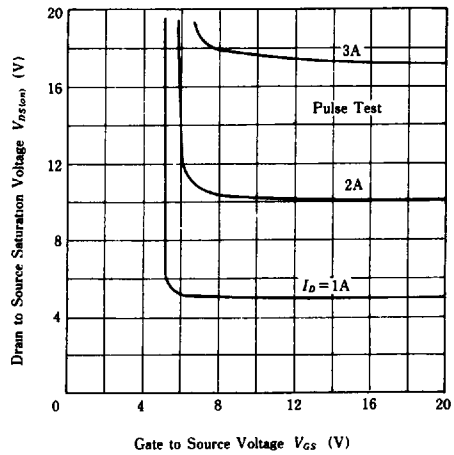

STATIC DRAIN-SOURCE ON STATE RESISTANCE VS. DRAIN CURRENT

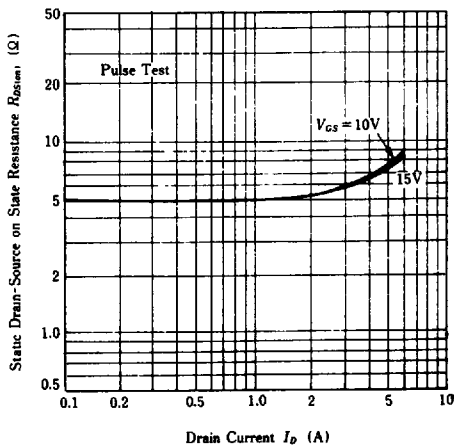


STATIC DRAIN-SOURCE ON STATE RESISTANCE VS. TEMPERATURE

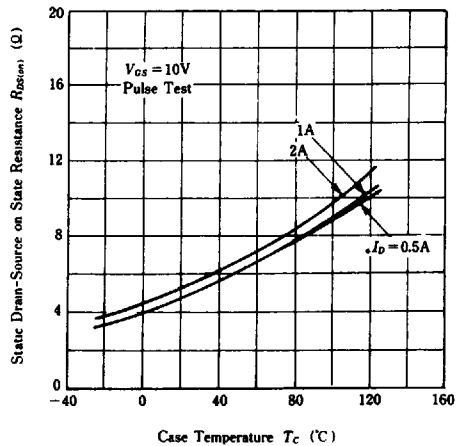


HITACHI/(OPTOELECTRONICS)


FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT

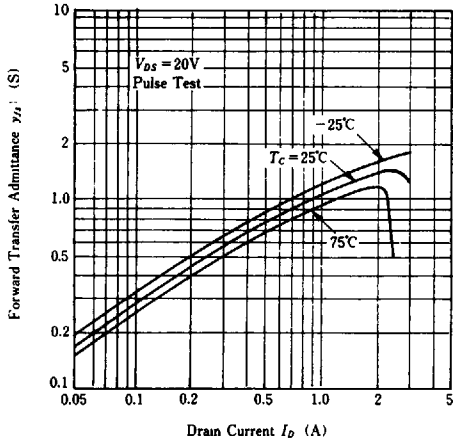


BODY-DRAIN DIODE REVERSE RECOVERY TIME

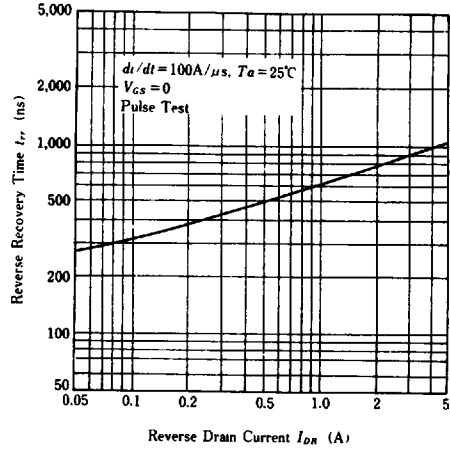


TYPICAL CAPACITANCE VS. DRAIN-SOURCE VOLTAGE

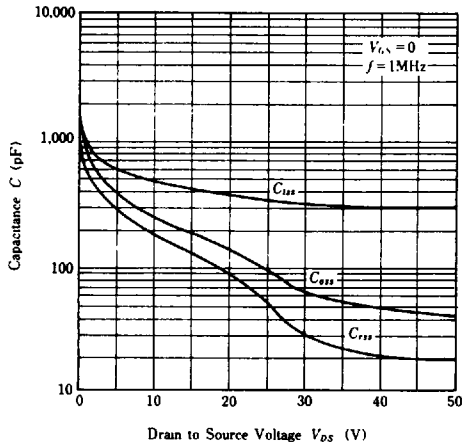


DYNAMIC INPUT CHARACTERISTICS

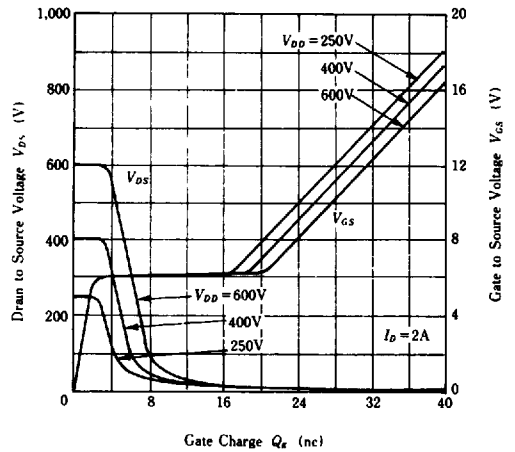


SWITCHING CHARACTERISTICS

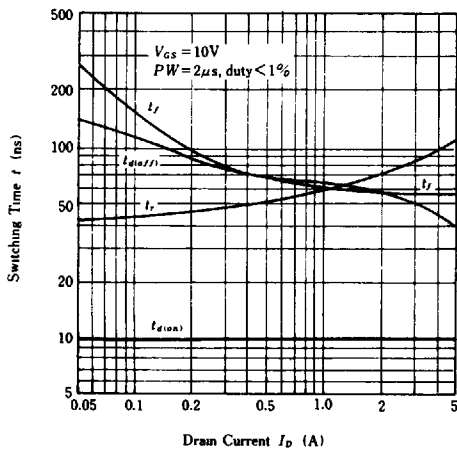


REVERSE DRAIN CURRENT VS. SOURCE TO DRAIN VOLTAGE

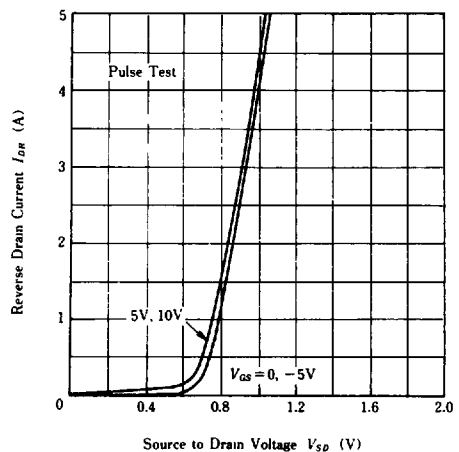

NORMALIZED TRANSIENT THERMAL IMPEDANCE VS. PULSE WIDTH

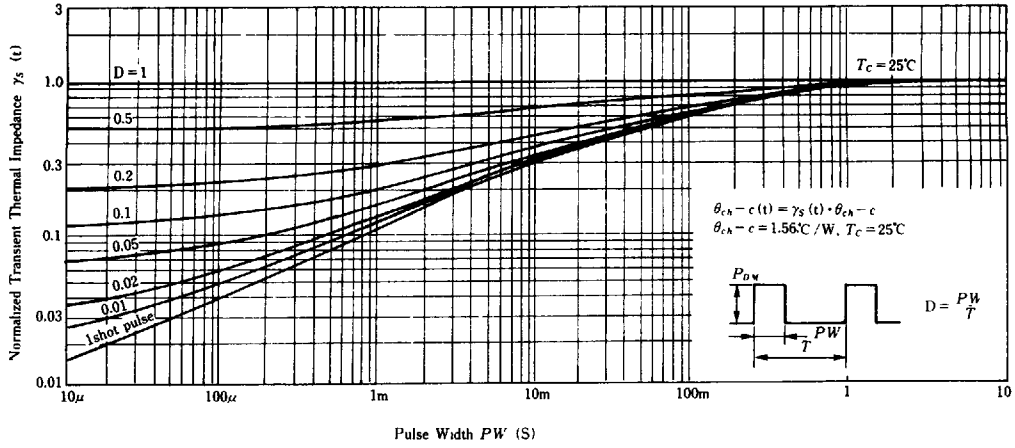

SWITCHING TIME TEST CIRCUIT

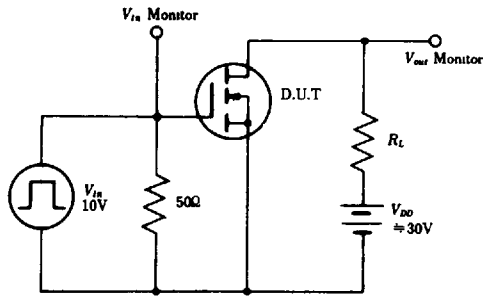

WAVEFORMS

