

66356

**SINGLE CHANNEL,
HIGH VOLTAGE OPTOCOUPLER**



04/02/2014

Features:

- 12 kV Isolation Voltage
- 850 nm Emitters
- 8 kV Output Blocking Voltage

Applications

- High Voltage Power Supplies
- High Voltage Instruments
- Voltage Level Shifting
- Space Instrumentation

DESCRIPTION

The **66356** is a single channel High Voltage Optocoupler using 850 nm Infrared Light Emitting Diodes optically coupled to a series of high voltage Silicon Photodiodes. The High Voltage Opto-coupler is mounted into a non hermetic 4 Pin custom package designed to withstand high isolation voltage and is available as a commercial device or screened according to methods of MIL-PRF-38534 (where applicable). **This device is not compliant to MIL-PRF-38534.**

ABSOLUTE MAXIMUM RATINGS ($t_A = 25^\circ\text{C}$ unless otherwise noted)

Operating Free-Air Temperature Range	-40°C to +100°C
Storage Temperature	-55°C to +125°C
Lead Soldering Temperature (1.6 mm from case for 5 seconds)	240°C
Input to output Isolation Voltage (Note 1)	12 kVDC

Input Diode:

Reverse Voltage (at 25°C case temperature)	7 VDC
Peak Forward Current (1µs pulse width, 300 pps)	1 A
Forward Current-Continuous at 25°C case temperature	100 mA
Input Power Dissipation (Note 2)	550 mW


Output Photodetector:

Output Reverse Breakdown Voltage	8 kVDC
Continuous Detector Current (V_{OUT} or P_{OUT} dependent) @ 2.5 kV	600 µA
Power Dissipation at 25°C case temperature (Note 3)	1.5 W


NOTES:

1. Measured with input leads shorted together and output leads shorted together.
2. Derate linearly at the rate of 15 mW/°C above 65°C case.
3. Derate linearly at the rate of 40 mW/°C above 65°C case.

Package Dimensions

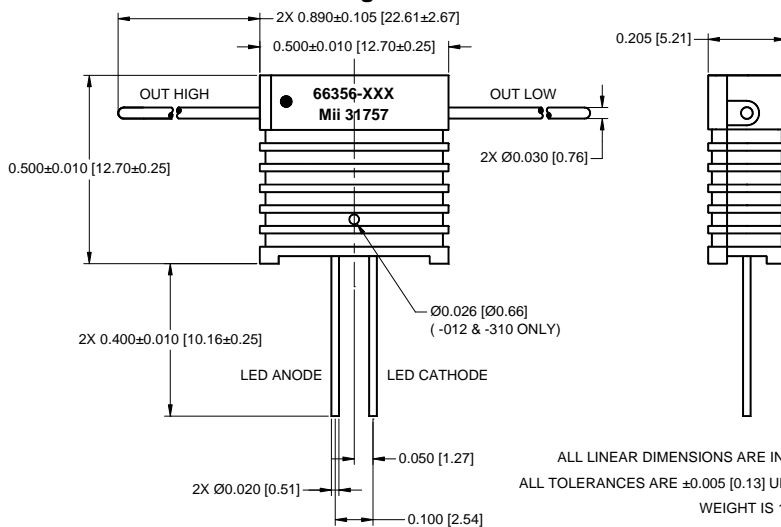

Schematic Diagram

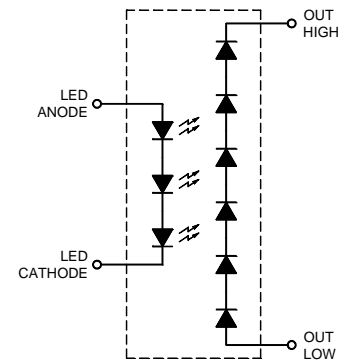

Micropac Industries cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement. Micropac reserves the right to make changes at any time in order to improve design and to supply the best product possible.

ELECTRICAL CHARACTERISTICST_A = 25°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Input Characteristic							
Input Forward Voltage	V _{F(IN)}	3.8		5.0	V	I _F = 20 mA	
		4.3		6.0		I _F = 100 mA	
Input Reverse Current	I _R			100	μA	V _R = 3 V	
Output Characteristic							
Output Forward Voltage	V _{F(OUT)}	3.8		5.0	V	I _F = 20 mA	
		4.3		6.0		I _F = 100 mA	
Dark Current	I _D			100	nA	I _F = 0 mA, V _{OUT} = 6.0 kV	
				250		I _F = 0 mA, V _{OUT} = 8.0 kV	
Coupled Characteristic							
Input-Output Isolation Current	I _{IO}			10	μA	V _{IO} = 12 kV	
Current Transfer Ratio	CTR	0.6			%	I _F = 20 mA, V _{OUT} = 0 V	
		1.2				I _F = 20 mA, V _{OUT} = 2.5 kV	
		1.4				I _F = 20 mA, V _{OUT} = 5.0 kV	

ELECTRICAL CHARACTERISTICST_A = 100°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Input Characteristic							
Input Forward Voltage	V _{F(IN)}	3.6		4.2	V	I _F = 20 mA	
		4.1		5.0		I _F = 100 mA	
Input Reverse Current	I _R			100	μA	V _R = 3 V	
Output Characteristic							
Output Forward Voltage	V _{F(OUT)}	2.8		3.8	V	I _F = 20 mA	
		3.5		4.3		I _F = 100 mA	
Dark Current	I _D			2.5	μA	I _F = 0 mA, V _{OUT} = 6 kV	
				7.5		I _F = 0 mA, V _{OUT} = 8 kV	
Coupled Characteristic							
Current Transfer Ratio	CTR	0.6			%	I _F = 20 mA, V _{OUT} = 0 V	
		1.0				I _F = 20 mA, V _{OUT} = 2.5 kV	
		1.2				I _F = 20 mA, V _{OUT} = 5 kV	

Micropac Industries cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement.
Micropac reserves the right to make changes at any time in order to improve design and to supply the best product possible.

66356

SINGLE CHANNEL, HIGH VOLTAGE OPTOCOUPLER


04/02/2014

ELECTRICAL CHARACTERISTICS

T_A = -40°C unless otherwise specified.



PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Input Characteristic							
Input Forward Voltage	V _{F(IN)}	4.0		4.8	V	I _F = 20 mA	
		4.5		5.4		I _F = 100 mA	
Input Reverse Current	I _R			100	μA	V _R = 3 V	
Output Characteristic							
Output Forward Voltage	V _{F(OUT)}	4.3		5.1	V	I _F = 20 mA	
		4.8		6.0		I _F = 100 mA	
Dark Current	I _D			5	nA	I _F = 0 mA, V _{OUT} = 6 kV	
				10		I _F = 0 mA, V _{OUT} = 8 kV	
Coupled Characteristic							
Current Transfer Ratio	CTR	0.6			%	I _F = 20 mA, V _{OUT} = 0 V	
		1.0				I _F = 20 mA, V _{OUT} = 2.5 kV	
		1.2				I _F = 20 mA, V _{OUT} = 5 kV	

Typical Characteristics:

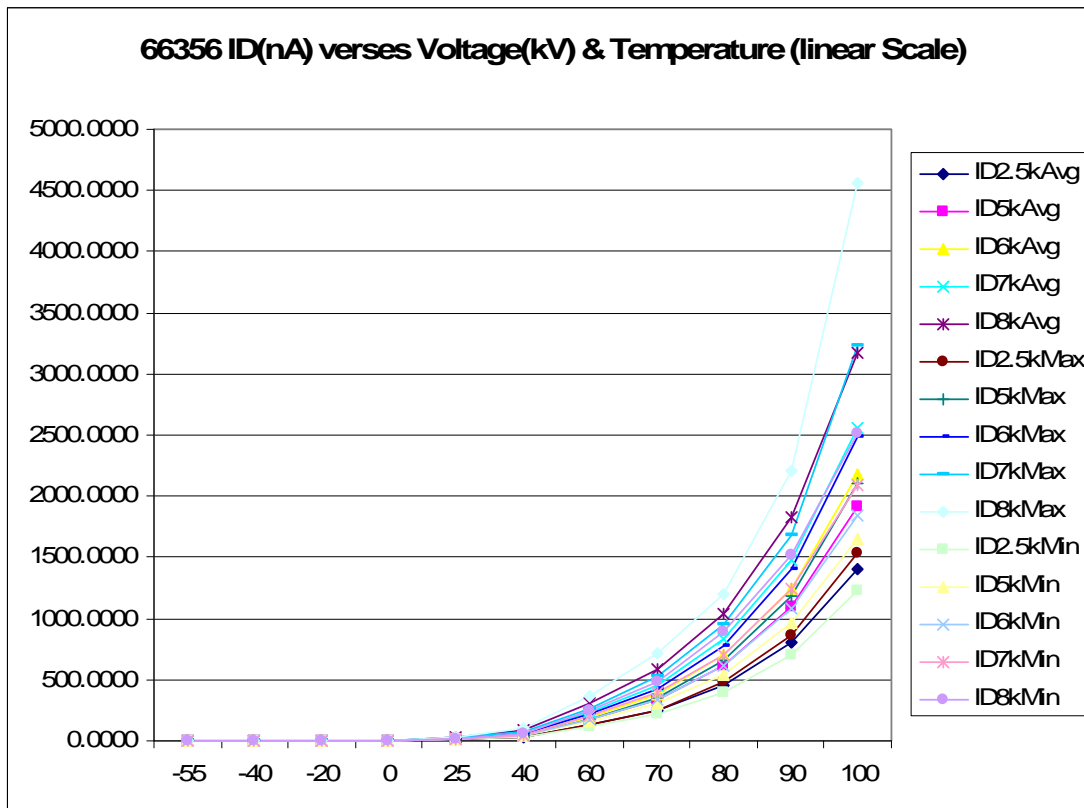


Micropac Industries cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement. Micropac reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Typical Characteristics:

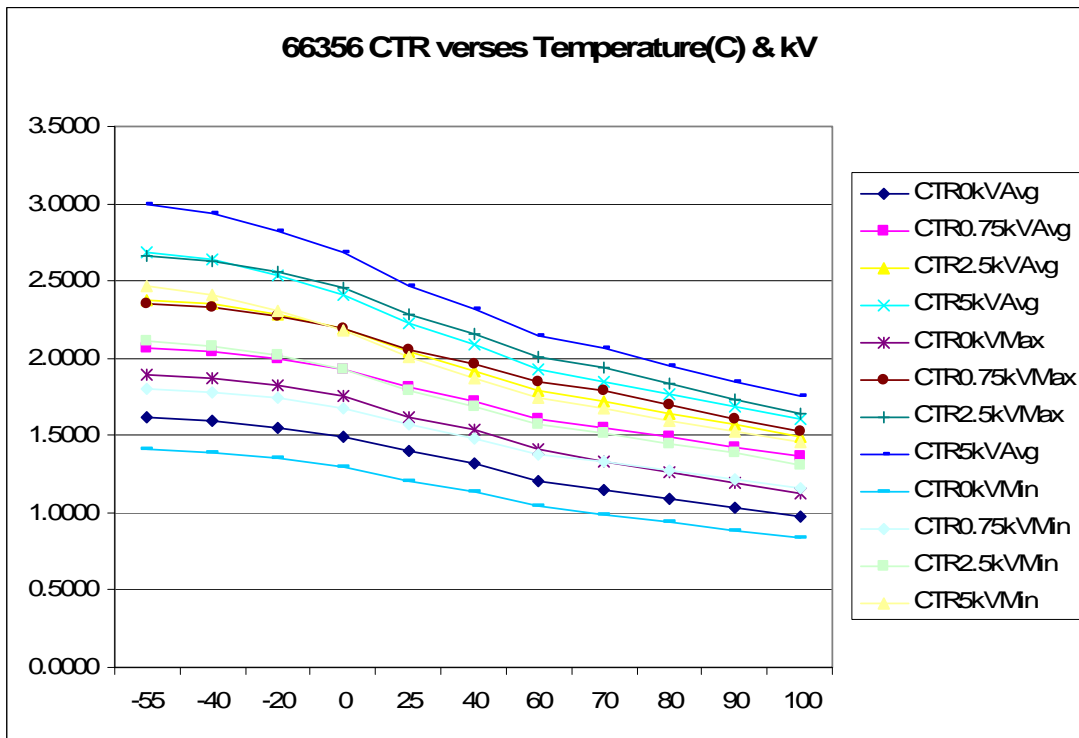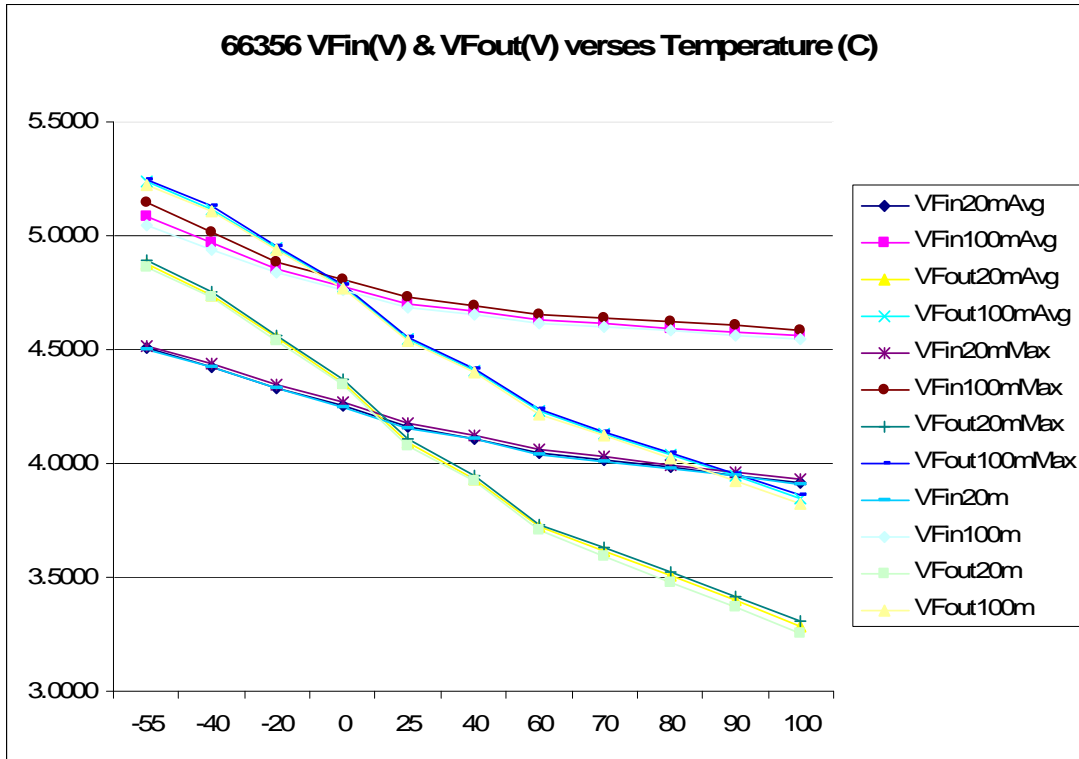

Micropac Industries cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement. Micropac reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Typical Characteristics:

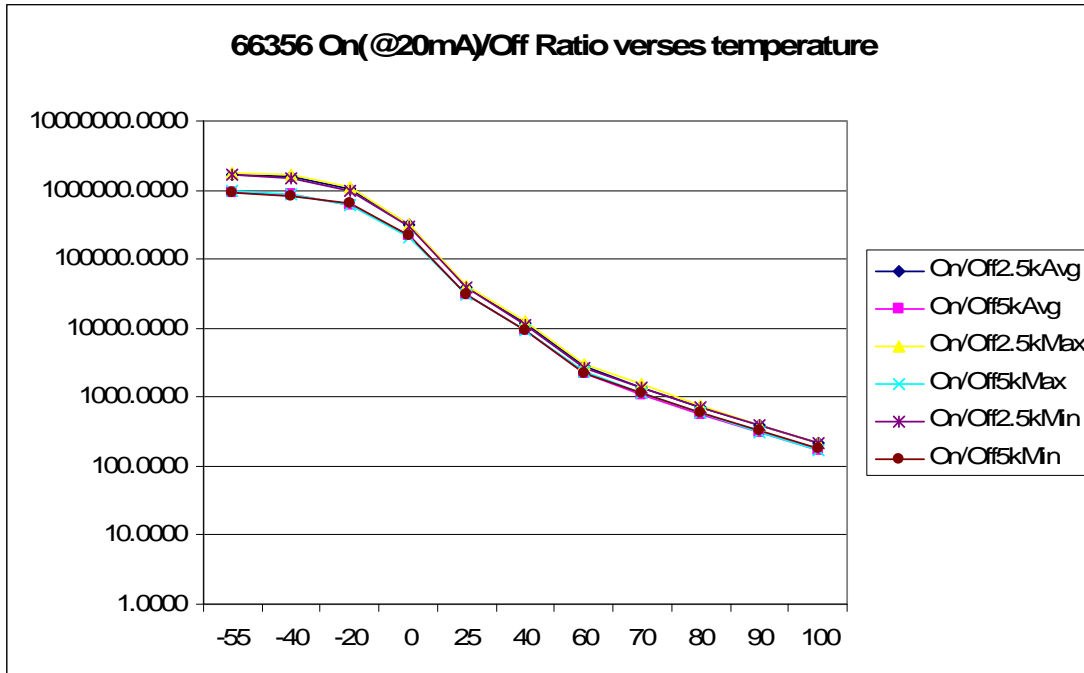

RECOMMENDED OPERATING CONDITIONS:

PARAMETER	SYMBOL	MIN	MAX	UNITS
Forward Current	I_F		20	mA
Operating Temperature	T_A	-40	100	°C

SELECTION GUIDE

PART NUMBER	PART DESCRIPTION
66356-002	Commercial, non-vented case
66356-012	Commercial, vented case
66356-300	Screened to space level, modified MIL-PRF-38534, non-vented case
66356-310	Screened to space level, modified MIL-PRF-38534, vented case

Micropac Industries cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement. Micropac reserves the right to make changes at any time in order to improve design and to supply the best product possible.