REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

- FERRULE CRIMPING TOOLS P/N
  227-944(M22520/5.01)
  227-1221-13
  (M22520/5.13) HEX: 6.47 L=10.16
- INNER CONTACT CRIMPING TOOL P/N
  413 SP 00 ADJUST TO 6
- PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE
- CONNECTOR ACCORDING TO NF C 93-570, DIN 47-295, CEI 169-13, UTEC 93-570



RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
MOUNTING HOLE

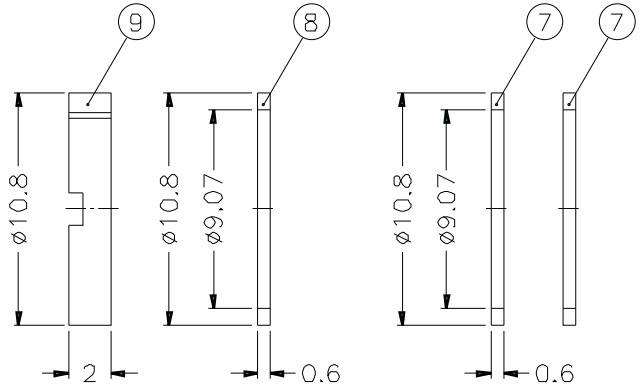

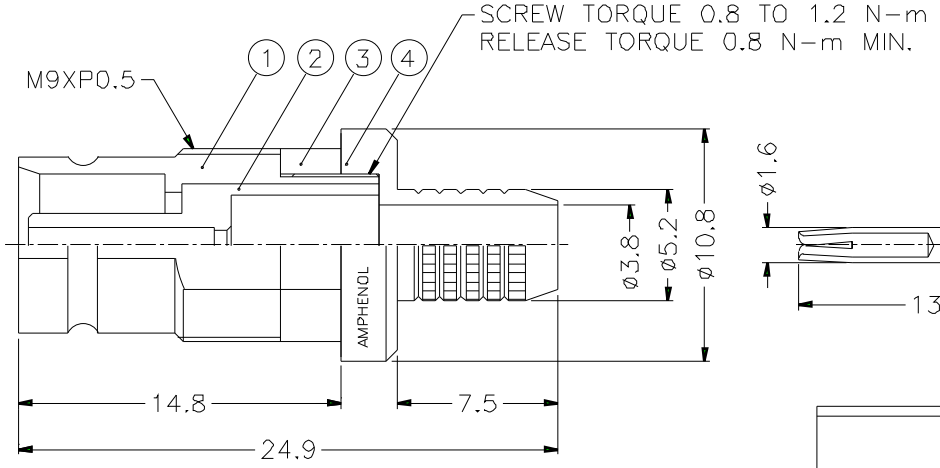

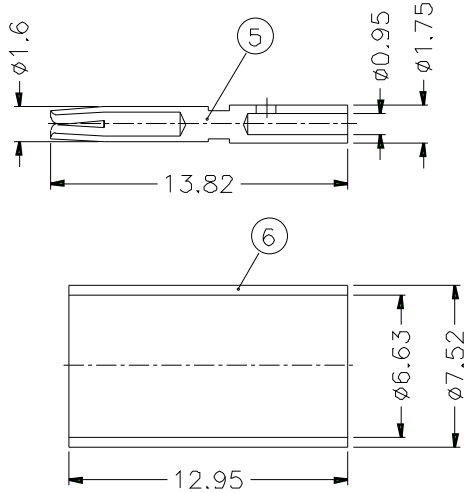

PANEL THICKNESS:
1. 1.2mm(GROUNDED OR ISOLATED)
2. 3mm(ONLY GROUNDED, WITHOUT WASHERS ⑦ AND ⑧)

CABLES: L910/12
L910/13

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
9	NUT	BRASS	NICKEL	1	
8	WASHER	BRASS	NICKEL	1	
7	ISOLATING WASHER	EPOXY GLASS -FR4 TYPE	NATURAL	2	
6	FERRULE	COPPER	NICKEL	1	
5	CONTACT PIN	BECU	GOLD	1	
4	BARREL	BRASS	NICKEL	1	
3	RING	PSU,20% GF	GREEN	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	BODY	BRASS	GOLD	1	

DIMENSIONS ARE IN MILLIMETERS

SCALE 3/1 ISSUE A

FILE NO.

PART NO. 156 931 03

APPROVED	DATE 10-11-01'
CHECKED	DATE 10-11-01'
DRAWN	DATE 10-11-01'

Amphenol

TITLE
1.6/5.6 75Ω BULKHEAD MOUNT JACK

DRAWING NO.

ITEM NO.