
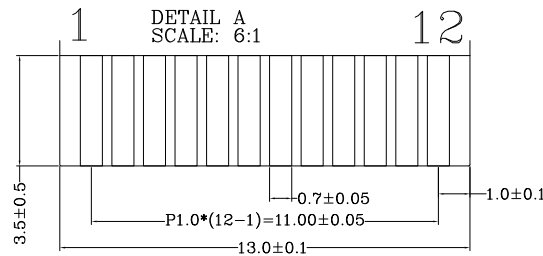


FPC Interface

1	BL_ANODE
2	BL_CATHODE
3	VG
4	XV0
5	V0
6	VSS
7	VDD
8	SDA
9	SCLK
10	A0
11	RSTB
12	CSB



NOTES:

1. GENERAL TOLERANCE: ±0.2
2. ROHS COMPLIANT.

Display Type	FSTN
	Positive
	Transmissive
Viewing Angle	6 O'Clock
LCD Driver IC	ST7567
Operating Voltage	VDD=3.3V
Operating Temp. Range With Good Visibility	-20°C TO 70°C
Operating Temp. Range Without Damage (LCD module functions are not guaranteed)	-40°C TO 85°C
Storage Temperature	-40°C TO 85°C
Interface	4-Line SPI
Backlight	White LED
Surface luminance	---
White X/Y	---

CUSTOMER APVL	CUSTOMER	DATE	2013-09-02
DRAWN	JACK	SCALE	TITLE
DFTG CHK		UNIT	MI9664E-G
ENGR CHK		mm	MODEL
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.			DWG NO 02 PAGE 1/2

	130902	Modify Module Display Mode
	130312	Modify Module Dimension