

GP750 PROGRAMMABLE INSTRUMENT

MULTI-CHANNEL ATTENUATOR PLUG-IN MODULE

DiCon's Attenuator Plug-In Module provides the capability to add a controlled amount of loss to an optical path. Each Plug-In Module is designed for easy integration into DiCon's GP750 modular system. All plug-in modules require no configuration and are hot swappable, providing true plug-and-play functionality.



FEATURES

- Precise repeatability
- Fast response time
- MEMS durability and reliability

APPLICATIONS

- Power Equalization
- OSNR Measurements
- Input Power Adjustment for EDFAs



GP750 PROGRAMMABLE INSTRUMENT


MULTI-CHANNEL ATTENUATOR PLUG-IN

OPTICAL SPECIFICATIONS^{1,8}

PARAMETER		RATING	
Excess Loss ²		0.8 dB max.	
WDL	Broad Band Application	0 to 15 dB ³	0.4 dB max.
		15 to 20 dB ⁴	0.7 dB max.
WDL	Narrow Band Application ⁵	0 to 20 dB ⁴	0.2 dB max.
PDL ⁶	0 to 15 dB	0.15 dB max.	
	15 to 20 dB	0.2 dB max.	
Back Reflection		-50 dB max.	
Tuning Resolution		0.1 dB max.	
Optical Power		500 mW max.	
Repeatability ⁷		0.1 dB max.	
Durability		1 x 10 ⁹ cycles min.	
Fiber Type		9/125 single mode fiber	

- All Specifications at room temperature, without connectors
- Operation from 1290 - 1330nm adds 0.2dB
- Operation from 1290 - 1330nm adds 0.4dB
- Operation from 1290 - 1330nm adds 0.3dB
- Maximum change of each 2 nm segment within the operating range
- Operation from 1290 - 1330nm adds 0.1dB
- Repeatability is defined after 100 cycles
- DiCon recommends use of external detectors or a dynamic power equalizer module for applications requiring absolute attenuation accuracy.

MECHANICAL DIMENSIONS (Units: mm)

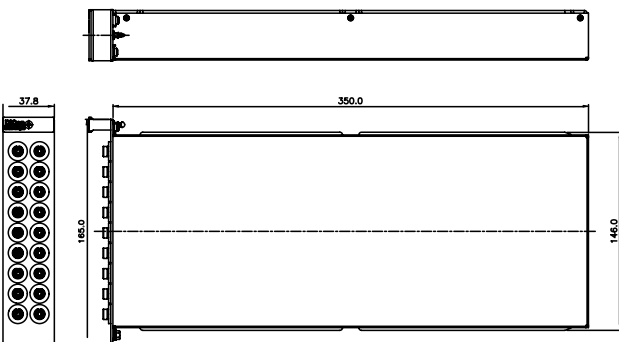

ORDERING INFORMATION

GPA- 1S - □ - □ - □ - □ - □ - 9 - □

Product Code

GPA Attenuator

Slot Width

1S 1-Slot Module

Number of Components

N Number of Components
(Specify 1 < N ≤ 8)

Attenuator Type

T Transparent
O Opaque

Attenuator Range

20 20 dB min.
X Specify X dB min.
(x ≤ 40)

Ripple Type

S Slow Ripple (Broad Band)
F Fast Ripple (Narrow Band)

Wavelength Range

13 1290 - 1330 nm
15 1528 - 1563 nm
16 1570 - 1610 nm
13/15¹ 1290 - 1330 nm & 1528 - 1563 nm
15/16¹ 1528 - 1563 nm & 1570 - 1610 nm

¹ Each wavelength band will have its own attenuation curve and only one curve can be used at a time.

Fiber and Jacket Type

9 Corning SMF-28 9µm fiber
Or other equivalent 9µm Singlemode fiber

Connector Type

FC/SPC FC/SPC
FC/APC FC/APC
N NONE

Also Available: SC, SC/UPC, SC/APC, ST, ST/UPC, LC