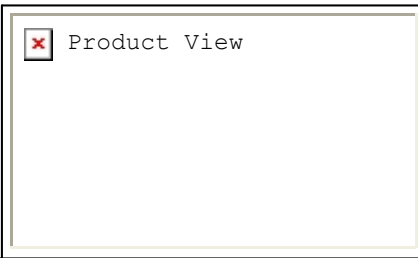


CBB0300 Product Details

 [Live Product Chat](#)

NEMA Terminal Blocks

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- CBB Series Block Series
- Terminal Block
- Block Type = Circuit Breaker
- In-Line Circuit Protection Application
- Contact Type = Strap Clamp

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

CBB0300

(1-1437398-5)

TE Internal Number: 1-1437398-5

**Obsolete**[Contact Product Information Center](#)
[Add to My Part List](#)
 [Request Sample](#)
 [Find Similar Products](#)
 [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Line Drawing](#)
- [Typical Assembly View](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Terminal Block
- Screw Size = 8-32 Pan Head W/Clamp

Electrical Characteristics:

- Voltage Rating (VAC) = 250
- Amperes (Amps.) = 3.0

Body Related Features:

- [Block Series](#) = CBB Series
- [Block Type](#) = Circuit Breaker
- Mount Style = Channel Mount (Dovetail Base)
- [Wire Range \(Solid and Stranded\)\[MCM\] \(AWG\)](#) = 18-12
- [Blown Fuse Indicator](#) = Without
- [Blown Fuse Indicator Type](#) = None
- Wire Strip Length (mm [in]) = 12.70 [0.500]

Contact Related Features:

- Contact Type = Strap Clamp

Housing Related Features:

- [Housing Material](#) = Nylon

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Temperature, Max. (?C) = 125

Operation/Application:

- Application = In-Line Circuit Protection

Other:

- Brand = Buchanan