

TOSHIBA Photo Darlington Transistor Silicon NPN Epitaxial Planar

TPS605, TPS605(LB)

Home Electric Equipment Such As Audio, Vcr, Etc.

OA Equipment Such As Copying Machine, Printer, Etc.

Optical Switch

- Micro-package (epoxy resin package)
Double end type: TPS605
DIP type: TPS605(LB)
- Mountable at a 2.5mm pitch
- High sensitivity: $I_L = 0.2\text{mA}$ (min.)
- Half value angle: $\theta_{1/2} = \pm 20^\circ$ (typ.)
- Maximum distance when used as an optical switch
TLN104 at DC drive $\approx 100\text{mm}$ at TPS605 $I_L \approx 500\mu\text{A}$


Maximum Ratings ($T_a = 25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-emitter voltage	V_{CEO}	30	V
Emitter-collector voltage	V_{ECO}	5	V
Collector current	I_C	40	mA
Collector power dissipation	P_C	75	mW
Collector power dissipation derating ($T_a > 25^\circ\text{C}$)	$\Delta P_C / ^\circ\text{C}$	-1	mW/ $^\circ\text{C}$
Operating temperature range	T_{opr}	$-25 \sim 85$	$^\circ\text{C}$
Storage temperature range	T_{stg}	$-30 \sim 100$	$^\circ\text{C}$
Soldering temperature (3s)	T_{sol}	260	$^\circ\text{C}$


Recommended Operating Conditions

Characteristic	Symbol	Min.	Typ.	Max	Unit
Supply voltage	V_{CC}	—	5	16	V
Operating temperature	T_{opr}	0	—	70	$^\circ\text{C}$

Pin Connection



Unit in mm

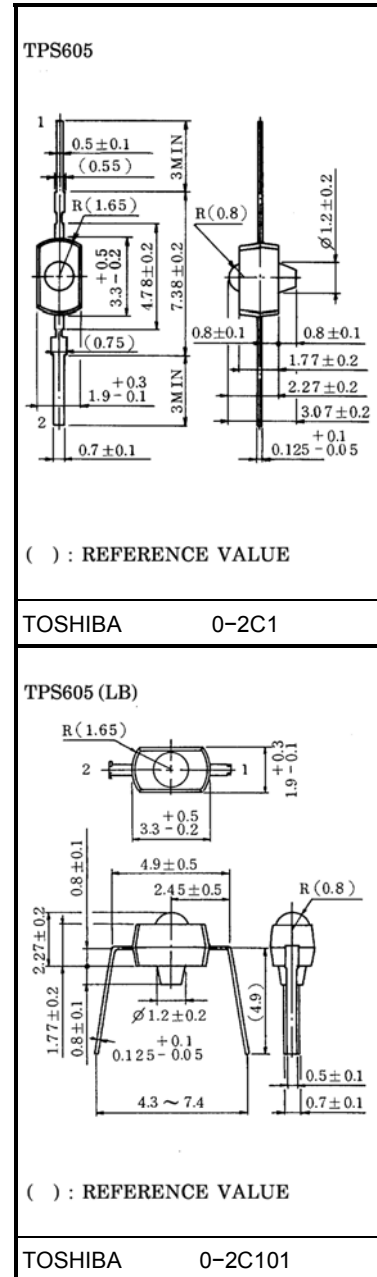

Weight: 0.08 g (typ.)



Opto-Electrical Characteristics (Ta = 25°C)

Characteristic		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Dark current		I_D (I_{CEO})	$V_{CE} = 16\text{ V}$, $E = 0$	—	0.03	0.25	μA
Light current (Note 1)		I_L	$V_{CE} = 3\text{ V}$, $E = 0.01\text{mW/cm}^2$ (Note 2)	0.2	1	—	mA
Collector-emitter saturation Voltage		$V_{CE(sat)}$	$I_C = 0.08\text{ mA}$, $E = 0.01\text{mW/cm}^2$	—	0.9	12	V
Peak sensitivity wavelength		λ_P	—	—	720	—	nm
Half vaule angle		$\theta \frac{1}{2}$	—	—	± 20	—	°
Switching time	Rise time	t_r	$V_{CC} = 5\text{ V}$, $I_C = 10\text{ mA}$ $R_L = 100\ \Omega$ (Note 3)	—	200	—	μs
	Fall time	t_f		—	150	—	

Note 1. I_L Classification A: 0.2 ~ 1.2 mA, B: 0.8 ~ 4.8 mA

2. Color temperature = 2870K, standard tungsten lamp



3. Switching time test circuit

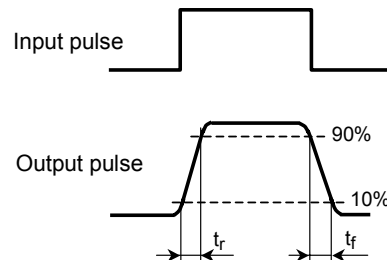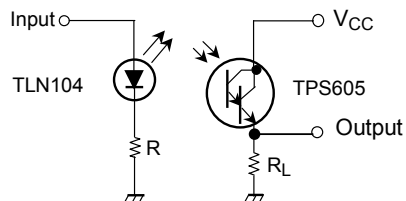





Precaution

Please be careful of the followings.


1. If the lead is formed, the lead should be formed at a distance of 0.8mm from the body of the device. Soldering shall be performed after lead forming. However, in case of TPS605 (LB), no lead forming shall be performed.
2. Soldering shall be performed within the range show below.




Area 2mm away from
The package ends

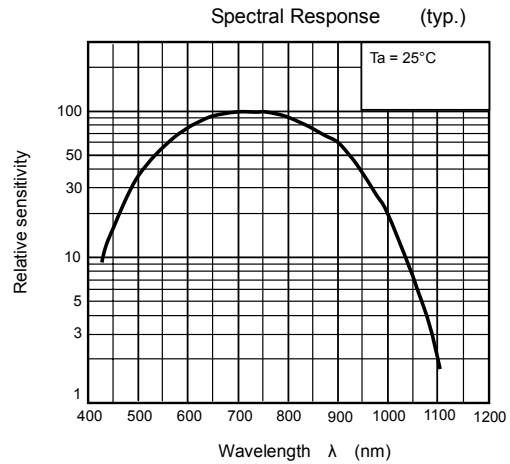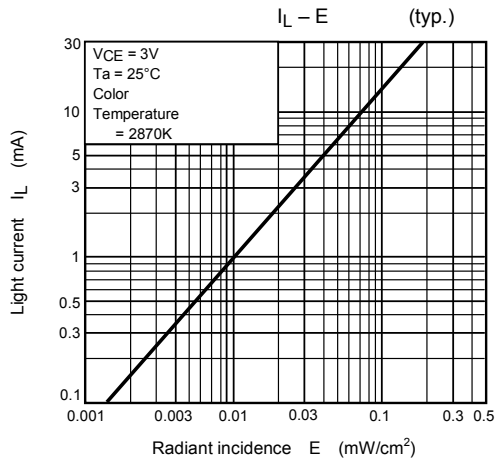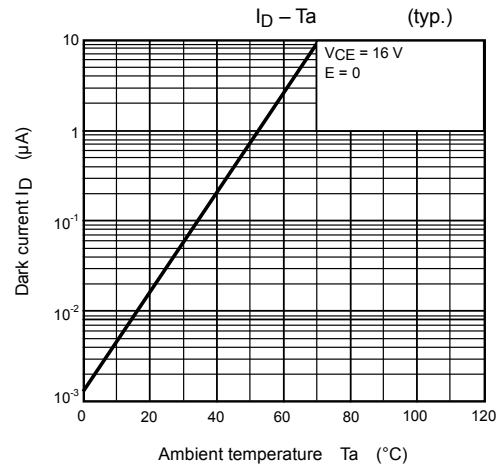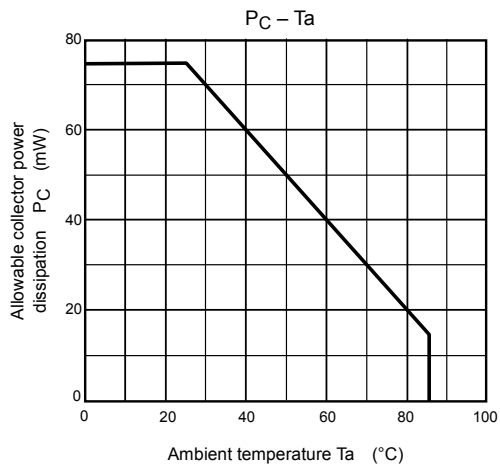


Switching Characteristics(non Saturated Operation) (typ.)

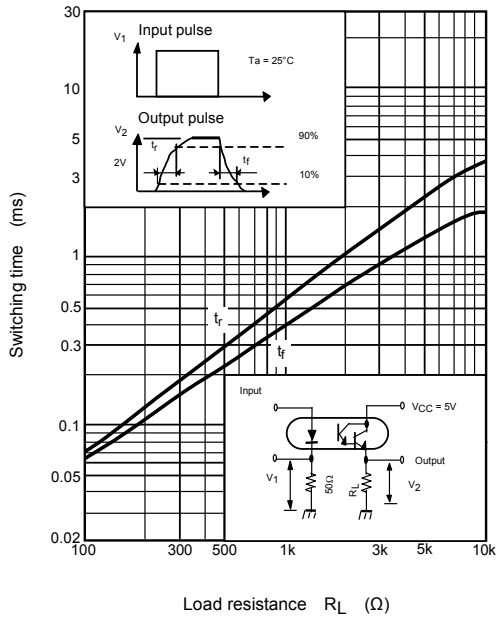


Switching Characteristics (saturated operation) (typ.)

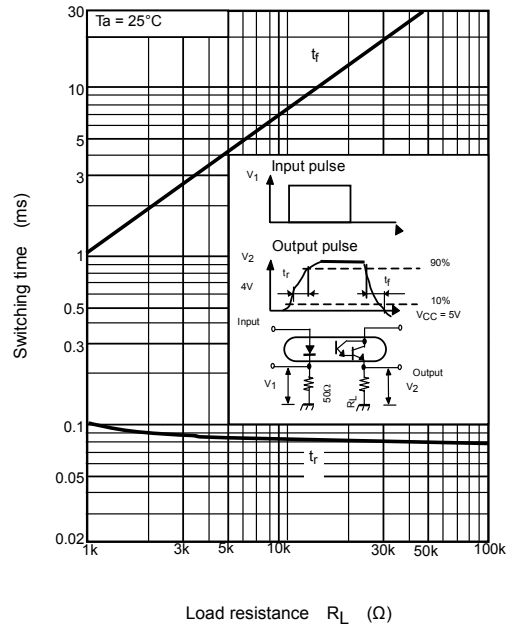

Directional Sensitivity Characteristic (typ.) (Ta = 25°C)

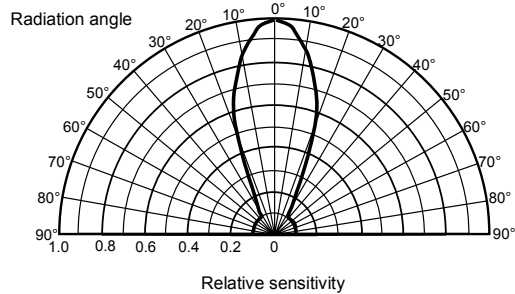

Relative I_L - T_a (typ.)

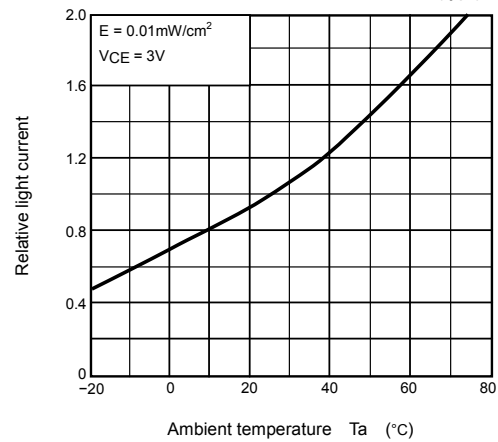

RESTRICTIONS ON PRODUCT USE

030619EBA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.