

Specification Status: Released

Electrical Rating

Voltage: 16V MAX
Current: 60A MAX

Chip Size: 5 X 12mm

Leads: Nickel 1/4H
0.125mm nominal thickness


Tape: Polyester (White)
13mm Width

Solder: Lead-free

Lot Marking Ink Color (Green)

Marking:

- Manufacturer's Mark
- ✕ W27 — Part Identification
- — Lot Identification

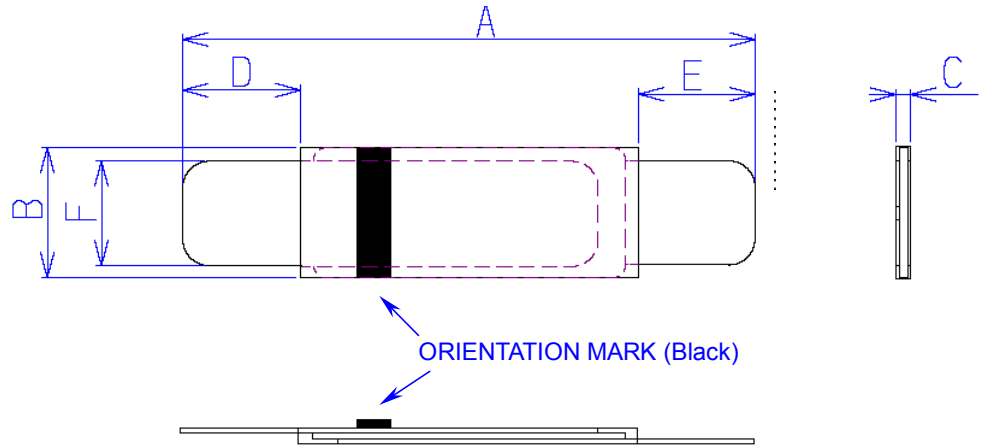

ORIENTATION MARK (Black)

TABLE I. DIMENSIONS:

	A		B		C		D		E		F		G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	20.9	23.1	4.9	5.3	0.6	0.8	4.1	5.8	4.1	5.8	3.9	4.1		
in*:	(0.82)	(0.92)	(0.19)	(0.21)	(0.02)	(0.03)	(0.16)	(0.23)	(0.16)	(0.23)	(0.15)	(0.16)		

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Muller Kelvin Clips Model BU-75K.

I HOLD	CURRENT TRIP LIMITS									TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION					
	AMPS AT 0°C		AMPS AT 25°C		AMPS AT 60°C		AMPS AT --°C		SECONDS AT 25°C, 13.5A					OHMS AT 25°C		WATTS AT 25°C, 16V		
HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	TYP	MAX	MIN	MAX	MIN	MAX	TYP	MAX
2.7	4.0	8.9	2.7	6.5	1.4	3.8	--	--	--	5	0.012	0.018	0.012	0.036	--	2.5		

Agency Recognitions: UL, TUV, CSA
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.