




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

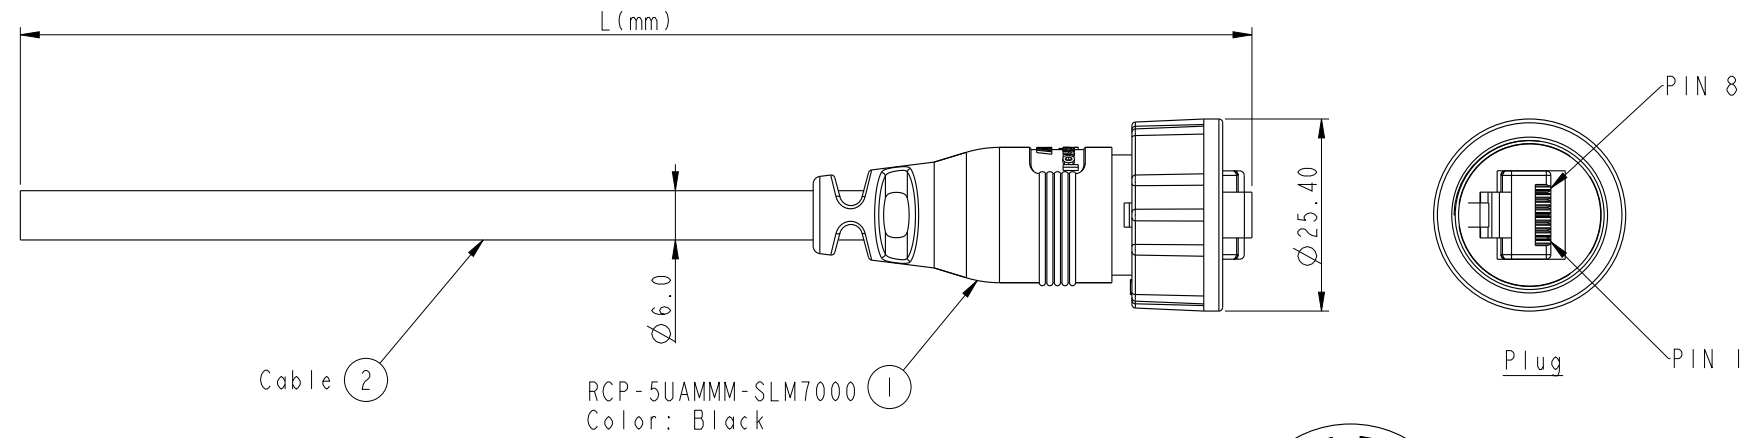

Pin Out		Plug
Wire Color	Plug	
Drain Wire	接地	
Brown	棕	8
Brown/white	棕/白	7
Green	綠	6
Blue/white	藍/白	5
Blue	藍	4
Green/white	綠/白	3
Orange	橙	2
Orange/white	橙/白	1

RCP-5UAMMM-SLM7AXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters
 Cable Length(L):01~99Meters
 X:
 (A)CAT5E UTP

Note:
 * (C) Important Dimension
 * Waterproof Rate:IP67.
 * Plug:PC,UL94V-2,Gold Plated,
 * Screw Nut:Nylon+GF,Black.
 * Gasket:EPDM,Black.
 * Cable: (A)CAT5E UTP,OD Max.:Ø6.0,Black.
 * Cable Length Tolerance: 01M:±40mm
 02~05M:±60mm
 06~10M:±100mm
 11~30M:±200mm
 30~99M:±500mm

UNIT:mm		TITLE	RJ45,C SIZE		ITEM NO	DRAWN BY	DATE
		CABLE 3P_LOCK 5E M CONN M PIN		Amphenol LTW	RCP-5UAMMM-SLM7AXX	Laurence_zang	2013-04-19
TOLERANCE		SCALE	SIZE	SHEET	OF	CHECKED BY	DATE
.X ±0.25		1:1	A4	1	1	RAISON	2013-04-19
.XX ±0.1		REV.	WC-REV.	QC: Inspection item		APPROVED BY	DATE
.XXX ±0.05		A	A.16	安費諾亮泰企業股份有限公司		VICTOR	2013-04-19
ANGLES ±1°							