

# HD74LV157

## Quad. 2-line to 1-line Data Selectors / Multiplexers

### Description

The HD74LV157 features a common strobe ( $\overline{G}$ ) input. When the strobe is high, all outputs are low. When the strobe is low, a 4-bit word is selected from one of two sources and is routed to the four outputs. The device provides true data. Low voltage and high impedance operation is suitable at the battery drive product (note type personal computer) and low power consumption extends the life of a battery for long time operation.

### Features

- $V_{CC} = 2.0 \text{ V}$  to  $5.5 \text{ V}$
- All inputs  $V_{IH} (\text{Max}) = 5.5 \text{ V}$  ( $@V_{CC} = 0 \text{ V}$  to  $5.5 \text{ V}$ )
- Typical  $V_{OL}$  ground bounce  $< 0.8 \text{ V}$  ( $@V_{CC} = 3.3 \text{ V}$ ,  $T_a = 25^\circ\text{C}$ )
- Typical  $V_{OH}$  undershoot  $> 2.0 \text{ V}$  ( $@V_{CC} = 3.3 \text{ V}$ ,  $T_a = 25^\circ\text{C}$ )
- Output current  
 $\pm 6 \text{ mA}$  ( $@V_{CC} = 3.0 \text{ V}$  to  $3.6 \text{ V}$ )  
 $\pm 12 \text{ mA}$  ( $@V_{CC} = 4.5 \text{ V}$  to  $5.5 \text{ V}$ )

### Function Table


Inputs				Output Y
$\overline{G}$	$\overline{A} / B$	A	B	
H	X	X	X	L
L	L	L	X	L
L	L	H	X	H
L	H	X	L	L
L	H	X	H	H

H : High level

L : Low level

X : Immaterial

Pin Arrangement

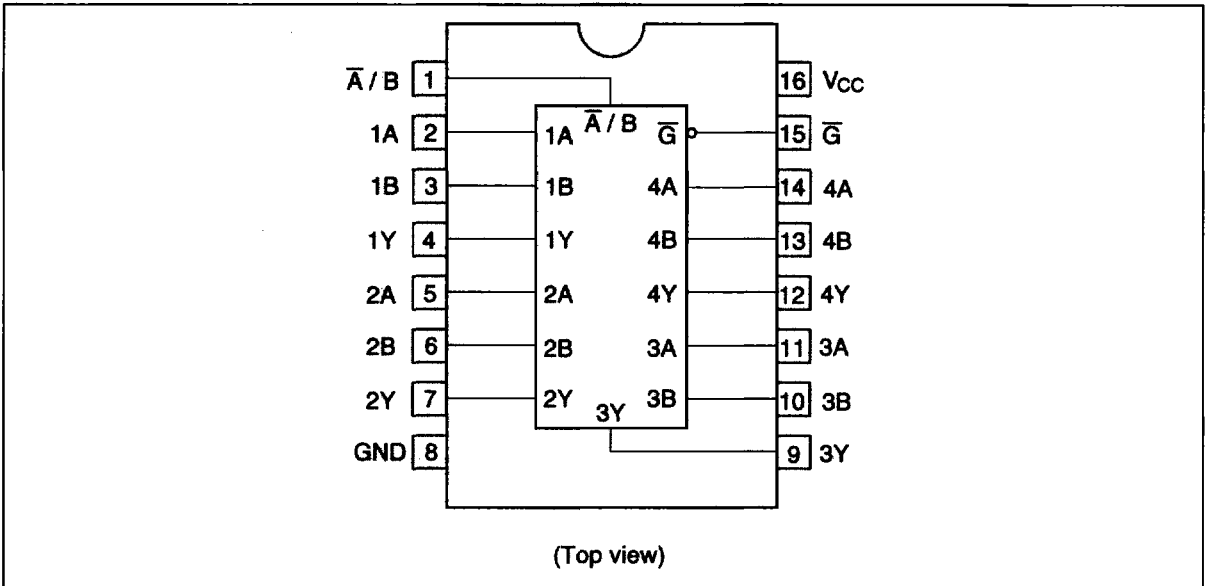

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit	Conditions
Supply voltage	$V_{CC}$	-0.5 to 7.0	V	
Input diode current	$I_{IK}$	-20	mA	$V_i = -0.5\text{ V}$
Input voltage	$V_i$	-0.5 to 7.0	V	
Output diode current	$I_{OK}$	-50	mA	$V_o = -0.5\text{ V}$
		50		$V_o = V_{CC} + 0.5\text{ V}$
Output voltage	$V_o$	-0.5 to $V_{CC} + 0.5$	V	
Output current	$I_o$	$\pm 25$	mA	
$V_{CC}$ , GND current / pin	$I_{CC}$ or $I_{GND}$	50	mA	
Storage temperature	$T_{stg}$	-65 to 150	$^{\circ}\text{C}$	

Note: The absolute maximum ratings are values which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.

# HD74LV157

## Recommended Operating Conditions

Item	Symbol	Ratings	Unit	Conditions
Supply voltage	$V_{CC}$	2.0 to 5.5	V	
Input / output voltage	$V_I$	0 to 5.5	V	$\overline{G}, \overline{A} / B, A, B$
	$V_O$	0 to $V_{CC}$		Y
Operating temperature	$T_a$	-40 to 85	°C	
Output current	$I_{OH}$	-6	mA	$V_{CC} = 3.0$ to 3.6 V
		-12 <sup>2</sup>		$V_{CC} = 4.5$ to 5.5 V
	$I_{OL}$	6		$V_{CC} = 3.0$ to 3.6 V
		12 <sup>2</sup>		$V_{CC} = 4.5$ to 5.5 V
Input rise / fall time <sup>1</sup>	$t_r, t_f$	50	ns / V	$V_{CC} = 5.5$ V
		100		$V_{CC} = 3.6$ V

Notes: 1. This item guarantees maximum limit when one input switches.

Waveform : Refer to test circuit of switching characteristics.

2. duty cycle  $\leq$  50%


## Electrical Characteristics ( $T_a = -40$ to 85°C)

Item	Symbol	$V_{CC}$ (V)	Min	Max	Unit	Test Conditions
Input voltage	$V_{IH}$	2.7 to 3.6	2.0	—	V	
		4.5 to 5.5	$V_{CC} \times 0.7$	—		
	$V_{IL}$	2.7 to 3.6	—	0.8		
		4.5 to 5.5	—	$V_{CC} \times 0.3$		
Output voltage	$V_{OH}$	2.7 to 5.5	$V_{CC} - 0.2$	—	V	$I_{OH} = -100 \mu A$
		3.0	2.4	—		$I_{OH} = -6 \text{ mA}$
		4.5	3.6	—		$I_{OH} = -12 \text{ mA}$
	$V_{OL}$	2.7 to 5.5	—	0.2		$I_{OL} = 100 \mu A$
		3.0	—	0.4		$I_{OL} = 6 \text{ mA}$
		4.5	—	0.5		$I_{OL} = 12 \text{ mA}$
Input current	$I_{IN}$	0 to 5.5	—	$\pm 1.0$	$\mu A$	$V_{IN} = 5.5 \text{ V}$ or GND
Quiescent supply current	$I_{CC}$	5.5	—	20	$\mu A$	$V_{IN} = V_{CC}$ or GND
	$\Delta I_{CC}$	3.0 to 3.6	—	500		$V_{IN} =$ one input at $(V_{CC} - 0.6) \text{ V}$ , other inputs at $V_{CC}$ or GND

Switching Characteristics

Item	Symbol	V <sub>CC</sub> (V)	Ta = 25°C			Ta = -40 to 85°C			Unit	From (Input)	To (Output)
			Min	Typ	Max	Min	Typ	Max			
Propagation delay time	t <sub>PLH</sub>	2.7	—	18.0	21.0	1.0	—	23.0	ns	A, B	Y
		3.3±0.3	—	15.5	18.5	1.0	—	20.5			
		5.0±0.5	—	11.5	15.5	1.0	—	17.0			
	t <sub>PHL</sub>	2.7	—	20.0	25.0	1.0	—	27.5	ns	A / B	Y
		3.3±0.3	—	18.0	22.5	1.0	—	25.0			
		5.0±0.5	—	13.0	19.0	1.0	—	21.0			
	t <sub>PHL</sub>	2.7	—	20.0	23.0	1.0	—	25.5	ns	G	Y
		3.3±0.3	—	18.0	20.5	1.0	—	22.5			
		5.0±0.5	—	13.5	18.0	1.0	—	20.0			
Input capacitance	C <sub>IN</sub>	3.3±0.3	—	—	—	—	2.5	—	pF		


• Test Circuit

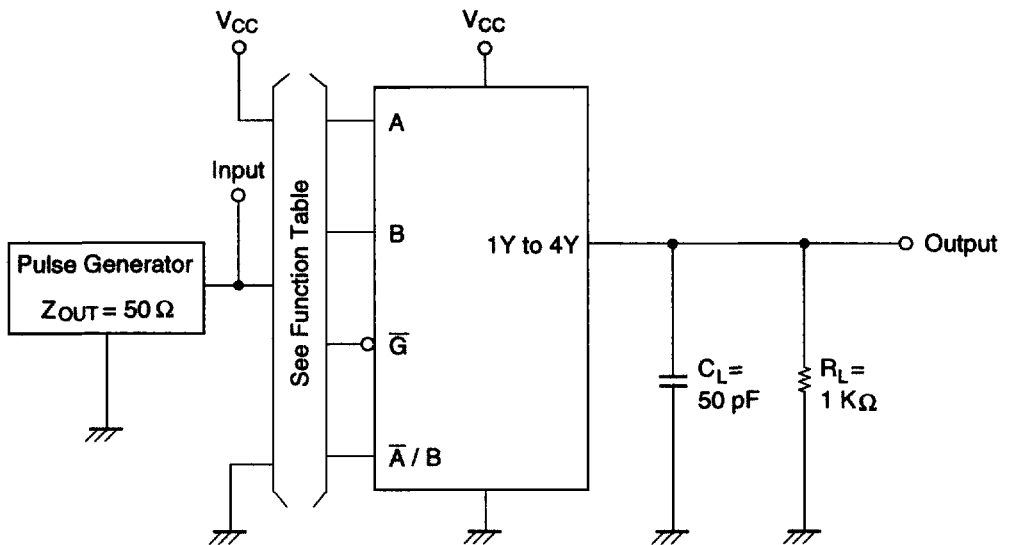

Note: 1. C<sub>L</sub> includes probe and jig capacitance.

# HD74LV157

## • Waveforms

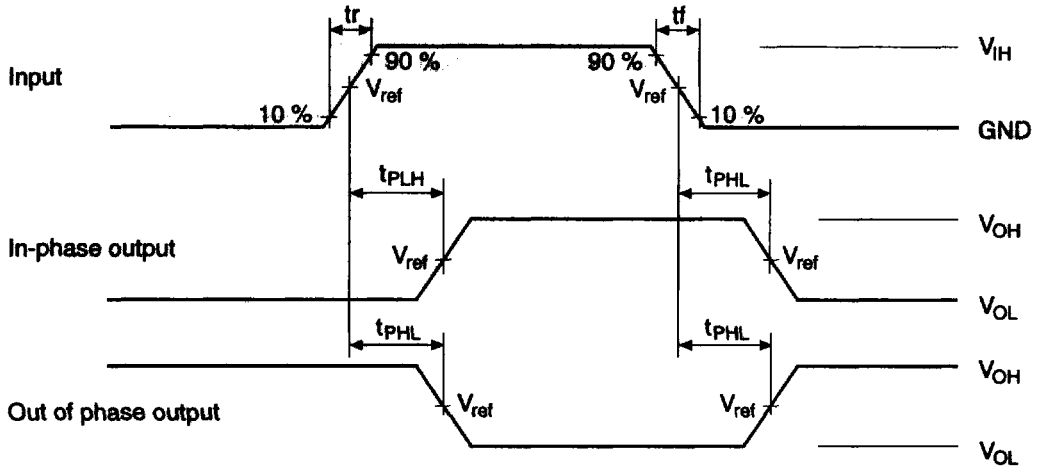

Symbol	$V_{CC} = 2.7\text{ V},$ $3.3 \pm 0.3\text{ V}$	$V_{CC} = 5.0 \pm 0.5\text{ V}$
$V_{IH}$	2.7 V	$V_{CC}$
$V_{ref}$	1.5 V	50% $V_{CC}$

- Notes: 1.  $t_r = 2.5\text{ ns}, t_f = 2.5\text{ ns}$   
 2. Input waveform : PRR = 10 MHz, duty cycle 50%