

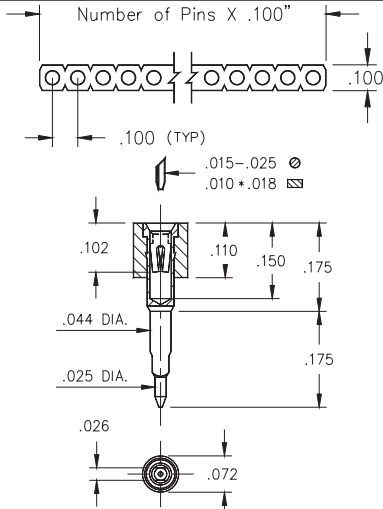


Fig. 1

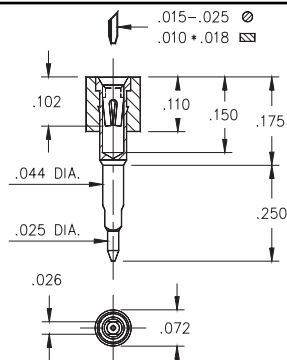


Fig. 2

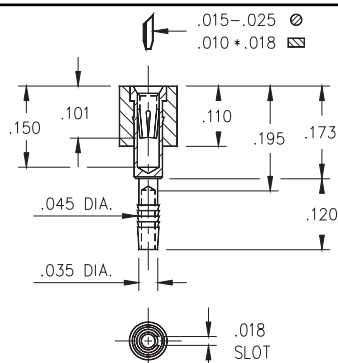


Fig. 3

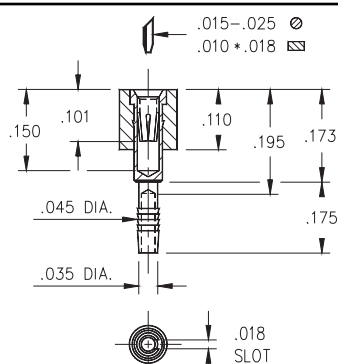


Fig. 4

- Unique compliant tail pins conform to the plated thru-hole without stressing the inner layers of a multilayer board.
- Recommended plated thru-hole for 304 series: .036"-.041" use a 1.1mm drill prior to plating. Using M-M# 0477 & 0478 pins.
- For 346 series: .040"±.003" finished plated thru-hole. using M-M# 4612 & 4613 pins. Patent No. 4,799,904.
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.



Ordering Information

Series 304...770

SOLDERLESS PRESS-FIT

Fig. 1

(For .062" Thick Boards)

304-13-1__-41-770

Specify # of pins

01-64

Series 304...780

SOLDERLESS PRESS-FIT

Fig. 2

(For .125" Thick Boards)

304-13-1__-41-780

Specify # of pins

01-64

Series 304...770 and 304...780 are available in plating code 13 only.

Series 346...012

COMPLIANT SOLDERLESS PRESS-FIT

Fig. 3

(For .060-.100" Thick Boards)

346-XX-1__-41-012

Specify # of pins

01-64

Series 346...013

COMPLIANT SOLDERLESS PRESS-FIT

Fig. 4

(For .090-.130" Thick Boards)

346-XX-1__-41-013

Specify # of pins

01-64

XX= Plating Code
See Below

SPECIFY PLATING CODE XX=	13	93	99
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)	30μ" Au	30μ" Au	200μ" Sn/Pb