



P.C.B. Layout

SPECIFICATION:

Current Rating : 1 A
 Dielectric Withstanding Voltage : 500VAC RMS
 Insulation Resistance: 500Megohms Min At 500V DC
 Contact Resistance : 30 Milliohms Max.
 Operating Temperature : -55°C To +105°C
 Contact : Phosphor Bronze, Gold Flashed
 Insulator : Nylon 46, LCP, UL 94V-0
 Shell : Copper Alloy, Tin Plated

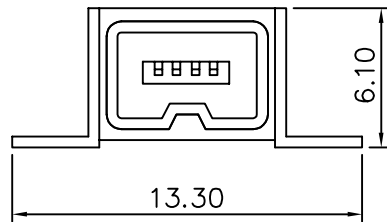

AUK A NUMBER OF AUK GROUP
太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 FW1X04SW

APPROVED BY
 MEI
 CHECKED BY
 RAN
 DRAWING BY
 HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX

SCALE NONE REV. A UNIT mm



AREA REVISIONS CHK DATE