

RED INDICATES ORIGINAL

P2 CONN TYPE	FIG NO	P1 CONN TYPE													
		PL30							PL330						
		SCHEMATICS													
		D1	D2	D3	D4	D5	D6	D7	D1	D2	D3	D4	D5	D6	D7
		DASH NUMBERS													
BJ26	1A	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11	-12	-13	-14
UBJ26	1A	-15	-16	-17	-18	-19	-20	-21	-22	-23	-24	-25	-26	-27	-28
BJ29	2A	-29	-30	-31	-32	-33	-34	-35	-36	-37	-38	-39	-40	-41	-42
UBJ29	2A	-43	-44	-45	-46	-47	-48	-49	-50	-51	-52	-53	-54	-55	-56
BJ46	1B	-57	-58	-59	-60	-61	-62	-63	-64	-65	-66	-67	-68	-69	-70
UBJ46	1B	-71	-72	-73	-74	-75	-76	-77	-78	-79	-80	-81	-82	-83	-84
BJ49	2B	-85	-86	-87	-88	-89	-90	-91	-92	-93	-94	-95	-96	-97	-98
UBJ49	2B	-99	-100	-101	-102	-103	-104	-105	-106	-107	-108	-109	-110	-111	-112
CJ20	3A	-113	-114	-115	-116	-117	-118	-119	-120	-121	-122	-123	-124	-125	-126
UCJ20	3A	-127	-128	-129	-130	-131	-132	-133	-134	-135	-136	-137	-138	-139	-140
CJ40	3B	-141	-142	-143	-144	-145	-146	-147	-148	-149	-150	-151	-152	-153	-154
UCJ40	3B	-155	-156	-157	-158	-159	-160	-161	-162	-163	-164	-165	-166	-167	-168
PL20	4A	-169	-170	-171	-172	-173	-174	-175	-176	-177	-178	-179	-180	-181	-182
UPL20	4A	-183	-184	-185	-186	-187	-188	-189	-190	-191	-192	-193	-194	-195	-196
PL40	4B	-197	-198	-199	-200	-201	-202	-203	-204	-205	-206	-207	-208	-209	-210
UPL40	4B	-211	-212	-213	-214	-215	-216	-217	-218	-219	-220	-221	-222	-223	-224
PL122	5A	-225	-226	-227	-228	-229	-230	-231	-232	-233	-234	-235	-236	-237	-238
UPL122	5A	-239	-240	-241	-242	-243	-244	-245	-246	-247	-248	-249	-250	-251	-252
PL123	5B	-253	-254	-255	-256	-257	-258	-259	-260	-261	-262	-263	-264	-265	-266
UPL123	5B	-267	-268	-269	-270	-271	-272	-273	-274	-275	-276	-277	-278	-279	-280

INCH	MM	INCH	MM
.005	0.13	.505	12.83
.030	0.76	.510	12.95
.143	3.63	.570	14.48
.187	4.75	.594	15.09
.218	5.54	.630	16.00
.221	5.61	.635	16.13
.281	7.14	.810	20.57
.284	7.21	2.106	53.49
.436	11.07	2.131	54.13
.440	11.18	2.160	54.86
.475	12.07	2.183	55.45
.480	12.19	2.184	55.47
		2.186	55.52
		2.215	56.26

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS				22-15		SH 1
REV	EO	DESCRIPTION	DWN	APPROVED	DATE	
A	7311	REV NOTE 4	FZ	2.10.86	12-16-86	

FIG 3A (P1)
-114 SHOWN
FIG 3B (P1)
-144 SHOWN

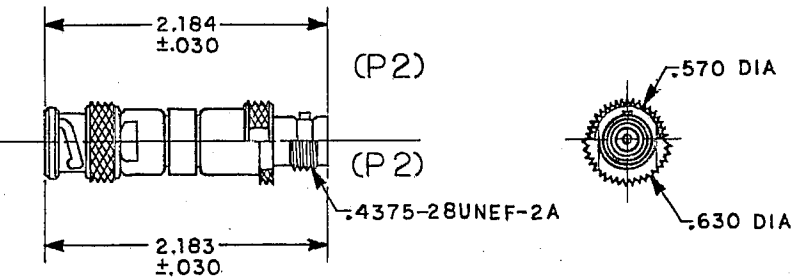


FIG 1A (P1)
-1 SHOWN
FIG 1B (P1)
-57 SHOWN

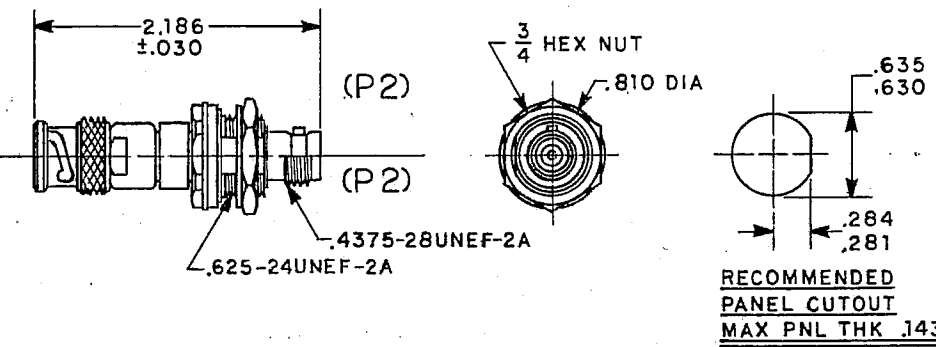


FIG 4A (P1)
-169 SHOWN
FIG 4B (P1)
-197 SHOWN

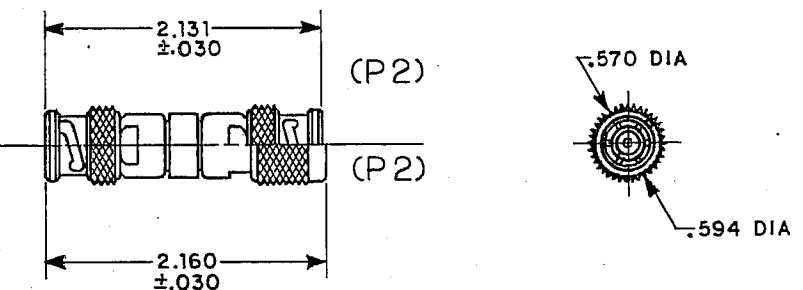


FIG 2A (P1)
-36 SHOWN
FIG 2B (P1)
-94 SHOWN


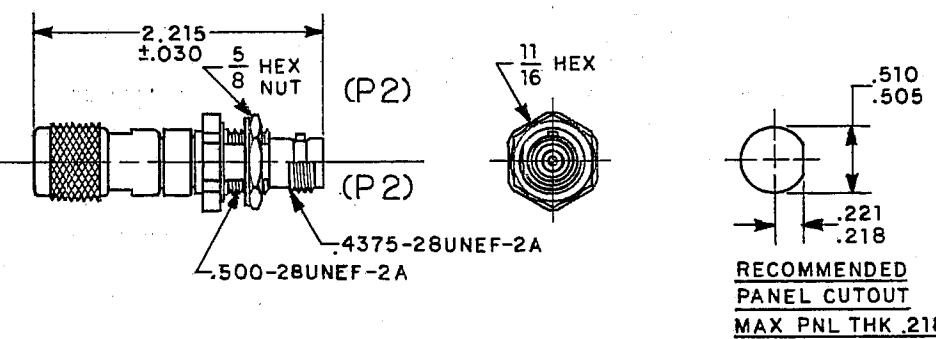


FIG 5A (P1)
-232 SHOWN
FIG 5B (P1)
-260 SHOWN

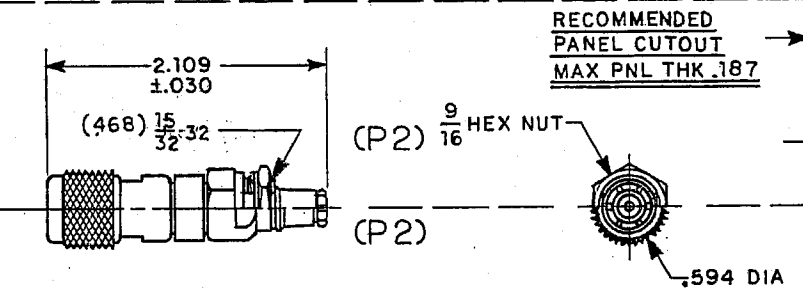

5. EXAMPLE OF COMPLETE MODEL NO:

AD-PL30-D1-BJ26
ADAPTER CONN P1 CONN P2 SCHEMATIC

4. EXAMPLE OF COMPLETE PART NO:

22-15-X
BASIC NO DASH NO

3. BETWEEN SERIES ADAPTER; TWBNC,TWTNC
POLARIZED TWO PIN TWINAXIAL PLUG TO 50 & 75 OHM
COAXIAL BNC/TNC PLUG/JACK, INSULATED & NONINSULATED
BULKHEAD MOUNT JACK, PUSH ON PLUG & PUSH ON BULKHEAD
MOUNT JACK

2. TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES

SCHEMATICS

D1

D2

D3

D4

D5

D6

D7

QTY	DESCRIPTION				PART NUMBER		ITEM		
TOL UNLESS SPECIFIED				TROMPETER					
.XX ±				ELECTRONICS, INC.					
.XXX ± .005				ADAPTERS; MALE TWO-PIN					
.XXXX ±				SERIES TO COMPLETE					
ANGLES ±				BNC/TNC SERIES					
DWN	DKC	7-23-86	MATERIAL	CODE IDENT	DRAWING NO.		REV		
CHK	FZ	7-27-86		14949	22-15		A		
ENGR	8-21-86								
APPR	8-23-86								
NEXT ASSY			SCALE 1 / 1	DATE 8-25-86	SHEET 1 OF 2				