SPECIFICATIONS

1.IMPEDANCE : 50 OHMS
2.FREQUENCY RANGE:0-4GHz
3.VOLTAGE RATING:335 VRMS
4.INSERTION LOSS:0.6 dB Max
5.INSULATION RESISTANCE: 1,000 Mega Ohms
6.GOLD FINISH :3 microinches OVER BRASS
7.GOLD FINISH :30 microinches OVER BRASS





RECOMMANDED
MOUNTING HOLE

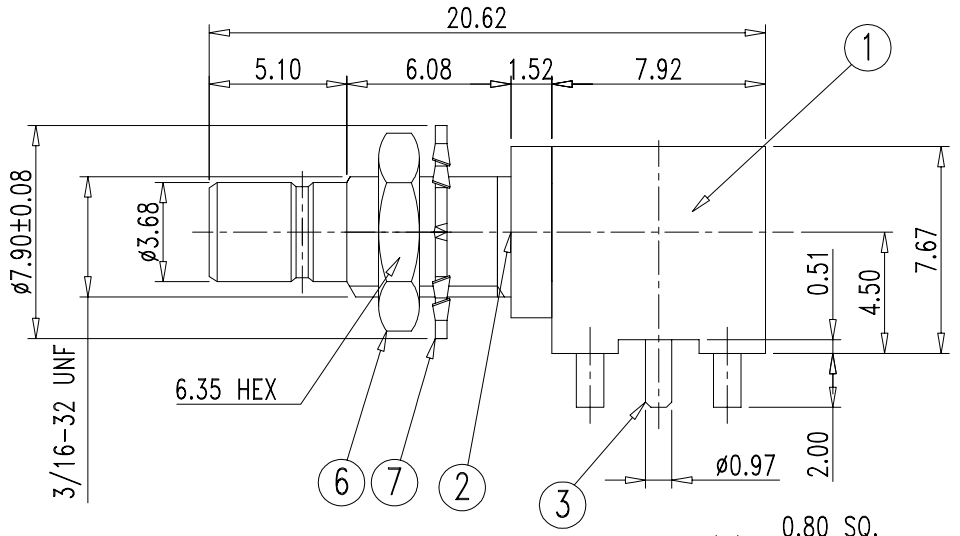

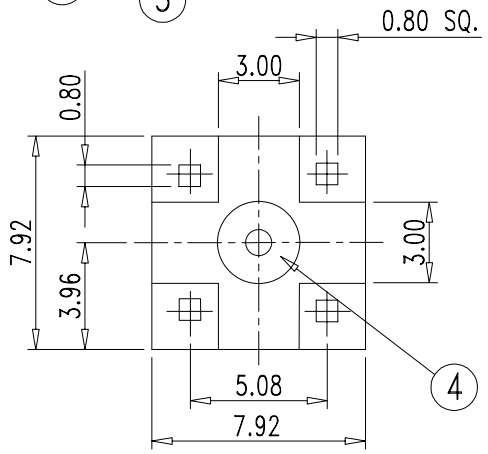

SMB-JRPB-50-LF
LEADFREE

RoHS Compliant

ITEM	DESCRIPTION	PART NUMBER	QTY	MATERIAL	FINISH
7	washer		1	BRASS	GOLD
6	nut		1	BRASS	GOLD
5	dielectric		1	PTFE	NONE
4	dielectric		1	PTFE	NONE
3	contact		1	BRASS	GOLD
2	body		1	BRASS	GOLD
1	body		1	BRASS	GOLD

MORETHANALL CONNECTORS ASSEMBLIES
煜倫股份有限公司

PART NO. SMB-JRPB-50			TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: SMB BULKHEAD JACK for PCB
DWG NO. SMB-JRPB-50	CHECKED BY CY			
FILE NO.	DRAWING BY			AREA / REVISIONS / HK / DATE
UNIT / mm	SCALE 1 : 1	PROJECTION		