



ZR16

- 2 Connections

Technical Data






Wire sizes		Insulating Material	
Solid min	1.5 mm ²	Material	PA 6.6
Solid max	16.0 mm ²	Flammability Class	UL 94 V-0
Stranded (flexible) min	1.5mm ²	Temperatures	
Stranded (flexible) max	25.0 mm ²	Working Temperature	-40 - 120 °C
Stranded (flexible) min	1.5mm ²	Dimensions	
Stranded (flexible) max	16.0 mm ²	Width	12.1 mm
Stranded with Ferrule min	1.5 mm ²	Length	81.5 mm
Stranded with Ferrule max	16.0 mm ²	Height TS35 x 7.5	51.5 mm

Electrical Data


General

Cross Connection Channels	2
Test Pick off	2

Colours

	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015
	ORANGE, similar RAL 2003
	GREEN, similar RAL 6018
	RED, similar RAL 3001

Connection Diagram

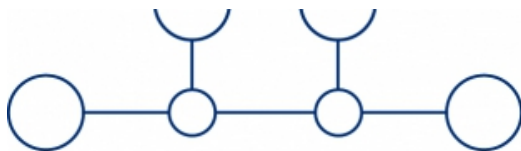

Order Data

Article Designation	Article Number	PU
ZR16-BEIGE	43636.2	50
ZR16-BLUE	43636.5	50
ZR16-ORANGE	43636.3	50

Accessoires

Article Designation	Article Number	PU
End Plate ZAP16/2A	493799.2	20
Cross-Connection insulated ZQ16/2	493800.8	20
Four-Way Covers ZAD16/4/B	493801.0	20
End Stopn ZES35	493748.2	50
Test Adapter ZTA16	493810.2	10
Quick Labelling PSB8/40	499323.7	400

Ratings

Ratings	CSA	CSAus	IEC
Rated Voltage	1.000 V	1000 V	1.000 V
Rated Current	65 A	65 A	76 A
Rated Wire Size	AWG 14-4	AWG 14-4	16.0 mm ²
Rated Impulse Voltage			8 V
Pollution Degree			3