REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



RECOMMENDED
MOUNTING HOLE

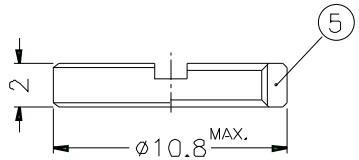



RECOMMENDED
CABLE STRIPPING DIM'S

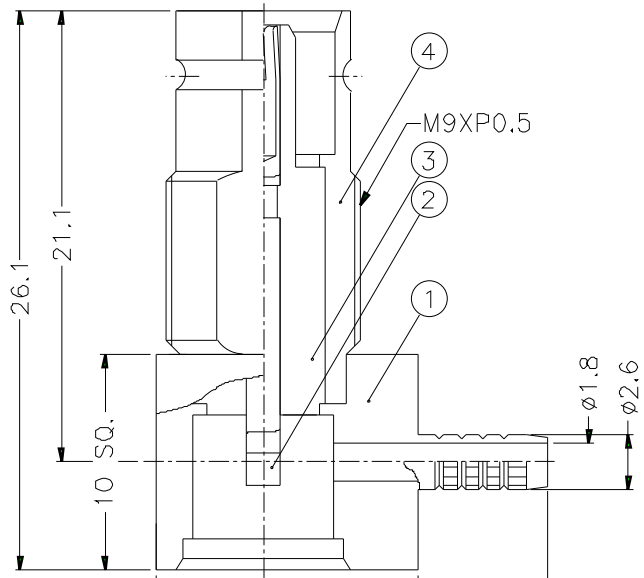



CABLES: – RG-179
– L910/22
– KX 22
– KX 3
– FLEX 2

– FERRULE CRIMPING TOOLS P/N
227-944 (M22520/5-01)
227-1221-03A (M22520/5-03A) HEX: 3.25, L=8.25
– INNER CONTACT TO SOLDER
– CONNECTOR ACCORDING TO: NFC 93-570
DIN 47-295, CEI 169-13
– PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE
PANEL THICKNESS: 6 MAX. mm



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	COVER	BRASS	NICKEL	1	
6	FERRULE	COPPER	NICKEL	1	
5	NUT	BRASS	NICKEL	1	
4	BODY	BRASS	GOLD	1	
3	INSULATOR	TEFLON	NATURAL	1	
2	CONTACT PIN	BECU	GOLD	1	
1	HOUSING	BRASS	NICKEL	1	

DIMENSIONS ARE IN MILLIMETERS

SCALE 3/1 ISSUE A

PART NO. 156 660 06

APPROVED DATE 10-11-01'

CHECKED DATE 10-11-01'

DRAWN DATE 10-11-01'

FILE NO.

Amphenol

TITLE
1.6/5.6 R/A CRIMP JACK

DRAWING NO.

ITEM NO.