

Transmissive Optical Sensor with Schmitt-Trigger Logic Output

Description


The TCSS1100 and TCSS2100 are transmissive sensors which include an infrared emitter and Photo Schmitt-Trigger with digital output interface, located face-to-face on the optical axes, in a leaded package which blocks visible light.

Features



- Package type: Leaded
- Detector type: Photo Schmitt-Trigger
- Dimensions TCSS2100:
L 24.5 mm x W 6 mm x H 10.8 mm
- Dimensions TCSS1100:
L 11.9 mm x W 6 mm x H 10.8 mm
- Gap: 3.1 mm
- Aperture: 1 mm
- Typical output current under test: $I_C = 16$ mA
- Output voltage level is LOW, if I_R beam is not interrupted
- Output device TTL compliant, open collector
- Daylight blocking filter
- Emitter wavelength: 950 nm
- Lead (Pb)-free soldering released
- Lead (Pb)-free component in accordance with RoHS 2002/95/EC and WEEE 2002/96/EC
- Minimum order quantity: 1020 pcs, 85 pcs/bulk



TCSS1100



TCSS2100



19157

Applications

- Detection of opaque material, documents etc.
- Paper position sensor in copy machines
- Position sensor for shaft encoder

Handling Precaution

Connect a capacitor of more than 100 nF between V_{S1} and ground in order to stabilize power supply voltage!

Order Instructions

Part Number	Remarks	Resolution, Aperture	Minimum Order Quantity
TCSS1100	Without mounting flange	0.6 mm, 1 mm	1020 pcs, 85 pcs/tube
TCSS2100	With mounting flange	0.6 mm, 1 mm	1020 pcs, 85 pcs/tube

Absolute Maximum Ratings

Coupler

Parameter	Test condition	Symbol	Value	Unit
Total power dissipation	$T_{amb} \leq 25$ °C	P_{tot}	250	mW
Ambient temperature range		T_{amb}	- 25 to + 85	°C
Storage temperature range		T_{stg}	- 40 to + 100	°C
Soldering temperature	Distance to package: 2 mm, $t \leq 5$ s	T_{sd}	260	°C

Input (Emitter)

Parameter	Test condition	Symbol	Value	Unit
Reverse voltage		V_R	6	V
Forward current		I_F	60	mA
Forward surge current	$t_p \leq 10 \mu s$	I_{FSM}	3	A
Power dissipation	$T_{amb} \leq 25^\circ C$	P_V	100	mW
Junction temperature		T_j	100	$^\circ C$

Output (Detector)

Parameter	Test condition	Symbol	Value	Unit
Supply voltages		V_{S1}	6.5	V
		V_{S2}	18	V
Output current		I_O	20	mA
Power dissipation	$T_{amb} \leq 25^\circ C$	P_V	250	mW
Junction temperature		T_j	100	$^\circ C$

Electrical Characteristics

Coupler

$T_{amb} = 25^\circ C$, unless otherwise specified

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Supply current	$V_{S1} = 16 V$	I_{S1}		3	5	mA
Output current	$V_{S1} = V_{S2} = 16 V, I_F = 0$	I_{OH}			1	μA
Input threshold current	$V_{S1} = 5 V$	I_{FT}		5	10	mA
Hysteresis	$V_{S1} = 5 V$	I_{Foff}/I_{Fon}		80		%
Output voltage	$I_{OL} = 16 mA, I_F \geq I_{FT}, V_{S1} = 5 V$	V_{OL}		0.15	0.4	V
Switching frequency	$I_F = 3 \times I_{FT}, V_{S1} = V_{S2} = 5 V, R_L = 1 k\Omega$	f_{sw}		200		kHz

Input (Emitter)

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Forward voltage	$I_F = 50 mA$	V_F		1.25	1.6	V
Junction capacitance	$V_R = 0, f = 1 MHz$	C_j		50		pF

Output (Detector)

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Supply voltage range		V_{S1}	4.75		5.25	V
		V_{S2}	4.0		16	V

Switching Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Rise time	$V_{S1} = V_{S2} = 5\text{ V}$, $I_F = 3 \times I_{FT}$, $R_L = 1\text{ k}\Omega$ (see figure 1)	t_r		50.0		ns
Turn-on time	$V_{S1} = V_{S2} = 5\text{ V}$, $I_F = 3 \times I_{FT}$, $R_L = 1\text{ k}\Omega$ (see figure 1)	t_{on}		1.0		μs
Fall time	$V_{S1} = V_{S2} = 5\text{ V}$, $I_F = 3 \times I_{FT}$, $R_L = 1\text{ k}\Omega$ (see figure 1)	t_f		20.0		ns
Turn-off time	$V_{S1} = V_{S2} = 5\text{ V}$, $I_F = 3 \times I_{FT}$, $R_L = 1\text{ k}\Omega$ (see figure 1)	t_{off}		3.0		μs

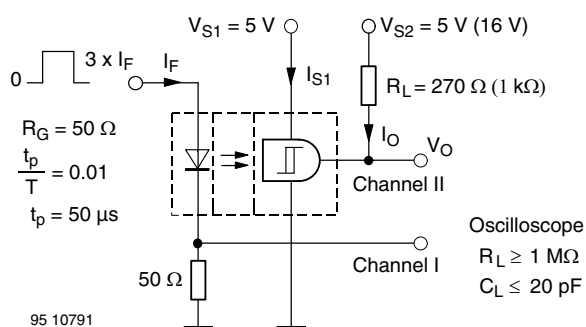


Figure 1. Test circuit for: t_r , t_{on} , t_f , t_{off}

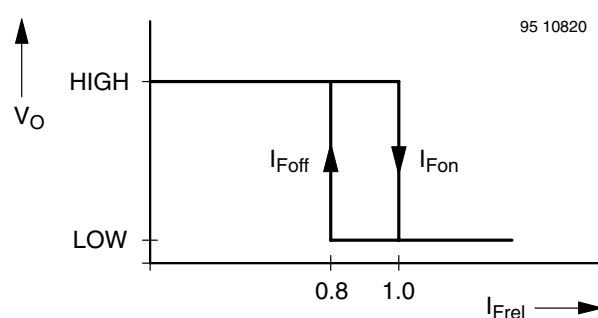


Figure 3. Hysteresis

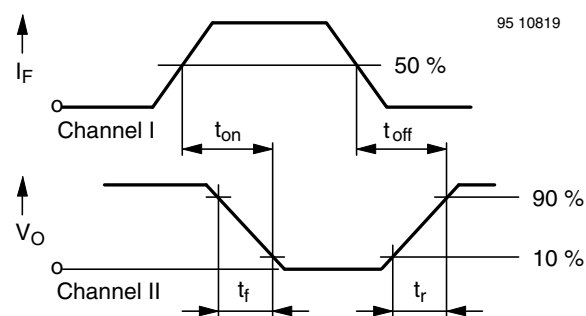


Figure 2. Pulse Diagram

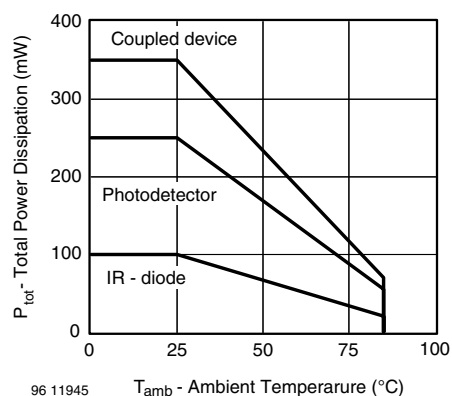


Figure 4. Power Dissipation Limit vs. Ambient Temperature

Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

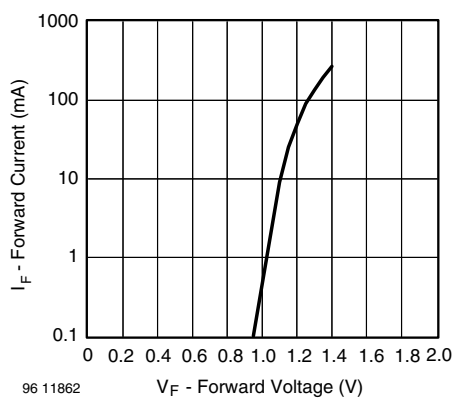


Figure 5. Forward Current vs. Forward Voltage

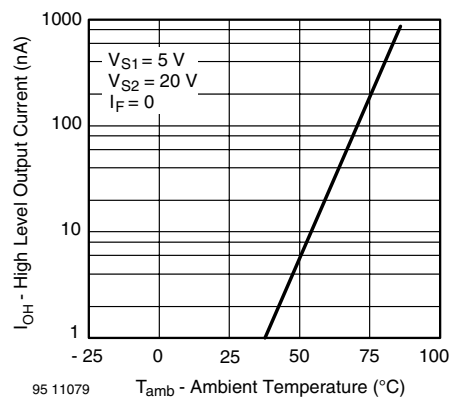


Figure 8. High Level Output Current vs. Ambient Temperature

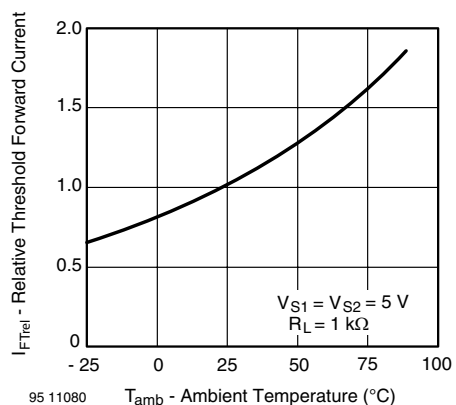


Figure 6. Relative Threshold Forward Current vs. Ambient Temperature





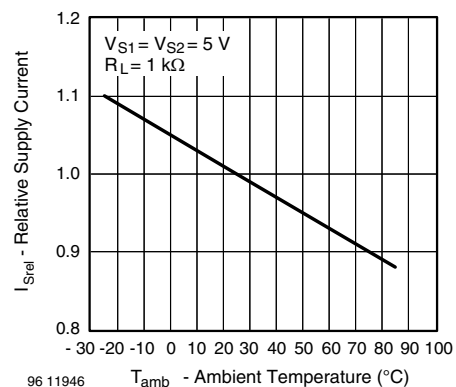


Figure 7. Rel. Supply Current vs. Ambient Temperature




Package Dimensions in mm

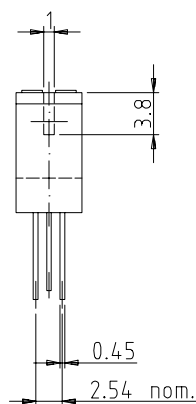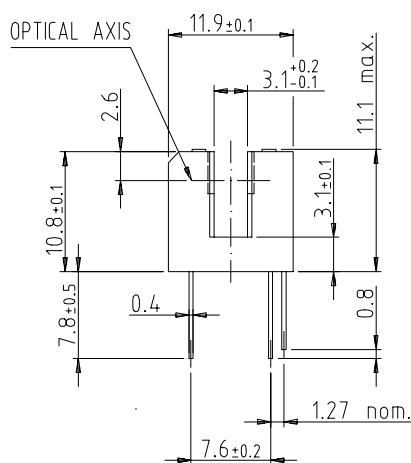


weight: ca. 0.80g



96 12096

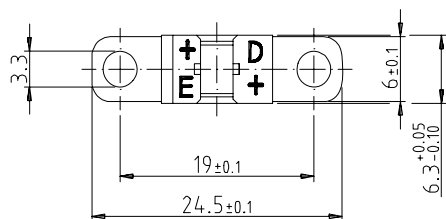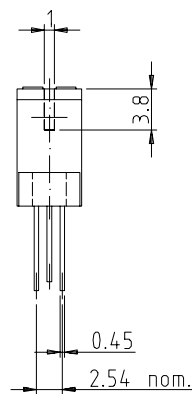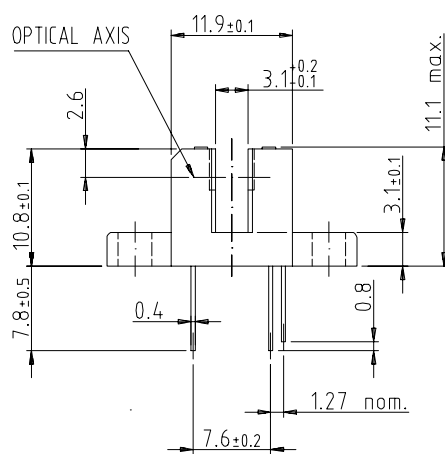


weight: ca. 0.90g



96 12097

Tube Dimensions

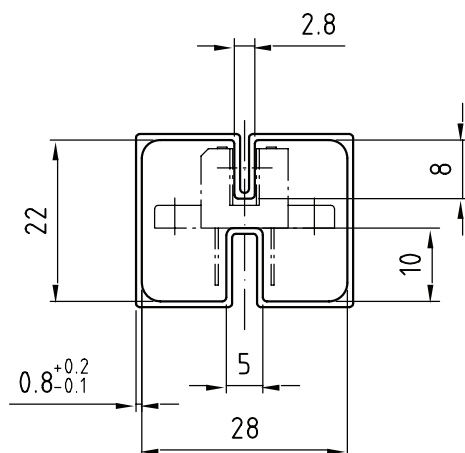

With rubber stopper

Tolerance: ± 0.5 mm

Length: 575 ± 1 mm

All dimensions in mm

Drawing-No.: 9.700-5100.01-4

Issue: 1; 25.02.00

20252



Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.