



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

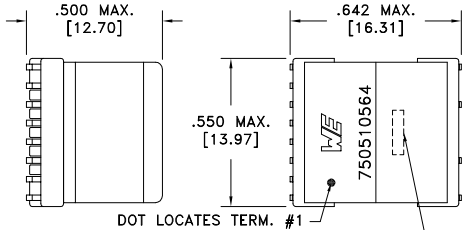


TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1

LOT CODE & DATE CODE

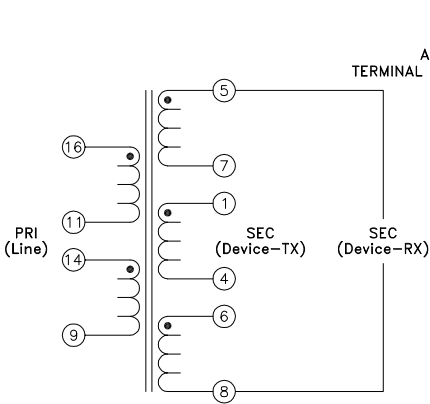

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

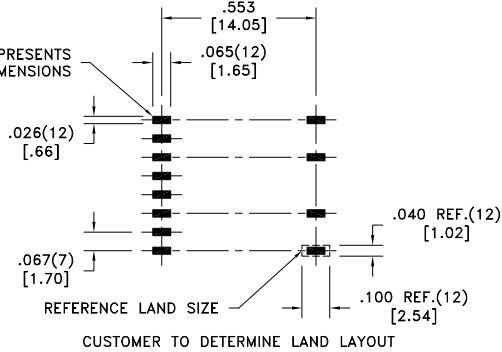

CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	16-9	tie(11+14), @20°C
D.C. RESISTANCE	1-4	@20°C
D.C. RESISTANCE	5-8	tie(6+7), @20°C
INDUCTANCE	16-9	tie(11+14), 100kHz, 100mVAC, Ls
LEAKAGE INDUCTANCE	16-9	tie(11+14, 1+4+5+6+7+8), 1MHz, 100mVAC, Ls
INTERWINDING CAPACITANCE	16-1	tie(9+11+14+16, 1+4+5+6+7+8), 100kHz, 100mVAC, Cs
DIELECTRIC	16-1	tie(11+14, 1+7, 4+6), 1875VAC, 1 second
URNS RATIO		(16-9):(1-4), tie(11+14)
URNS RATIO		(16-9):(5-8), tie(11+14, 1+7, 4+6)
TOTAL HARMONIC DISTORTION		30kHz, 1.4Vrms across SEC, (Device-Tx, 1-4), 18 ohm load on transmit, 100 ohm input, tie(11+14)

GENERAL SPECIFICATIONS:


OPERATING TEMPERATURE RANGE: -40°C to +85°C.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:
 - Basic insulation for a primary circuit at a working voltage of 250Vrms.

Designed to meet K.21, 6kV (10x700usec) surge test between primary and secondary.

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0739 www.we-online.com/midcom	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$ Decimals: $\pm .005$ [.13] Footprint: $\pm .005$ [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750510564
6A	6/14	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750510564	SPECIFICATION SHEET 1 OF 1

