


Typ ST06..

- 5,08 mm pin spacing
- 2 .. 24-poles single mold
- vertical header
- selective loading possible
- not to be connected or disconnected under electrical load
- closed end

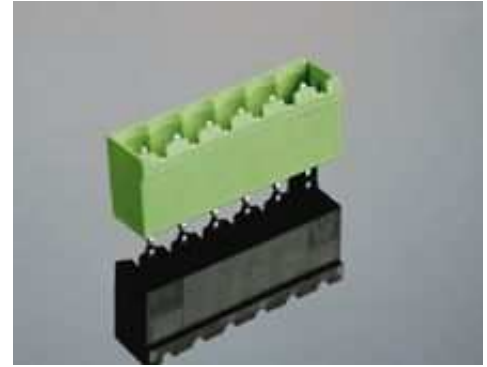

Rated voltage	cULus 300 V	VDE 250 V
Rated current	15 A	12 A
Rated impulse voltage		4 kV
Pollution degree		3
Dimensions	Spacing PCB hole diameter	5,08 mm 1,4 mm
Materials	Insulating material Flammability class Temperature range	PA UL 94 V-0 -30°C/+105°C
Colour	Contact pin RAL 6018	Cu green

Dimensions

