

PIN	CONNECTION
1	Freq adjustment
7	Ground
8	Output
14	Supply

Scale 1:1

## Features

- ▶ **Compact 14-pin DIL package (SMD optional)**
- ▶ **12.0V supply voltage**
- ▶ **HCMOS compatible output**
- ▶ **Very fast warmup**
- ▶ **Low power consumption**
- ▶ **Wide temperature range available**

## Standard Frequencies

Frequencies in MHz	
10.00000	20.00000
12.80000	26.00000
16.00000	40.00000
16.38400	50.00000
19.44000	52.00000

## Specifications

Parameters	Product	Option Codes
	MCOCXO	
<b>Frequency range:</b> 10.0kHz ~ 54.0MHz	■	
<b>Frequency stability:</b> ±0.7ppm max first year ±4ppm max in 10 years ±0.1ppm over $V_{DD} \pm 0.5V$ ±0.01ppm over 10% change in load	■ ■ ■ ■	
<b>Short term stability:</b> $5 \times 10^{-10}$ , 0.1 to 30s $5 \times 10^{-11}$ over 1s typ	■ ■	
<b>Temperature stability:</b> ±0.2ppm max, 0 to +60°C ±0.05ppm max, 0 to +60°C ±0.3ppm max, -20 to +70°C ±0.1ppm max, -20 to +70°C ±0.5ppm max, -40 to +85°C ±0.2ppm max, -40 to +85°C	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	A TA B TB C TC
<b>Operable temperature range:</b> -40 to +85°C	■	
<b>Storage temperature range:</b> -65 to +125°C	■	
<b>Output waveform:</b> HCMOS compatible '0' = +0.4V max, '1' = 4.5V min 40:60 max	■ ■ ■	
<b>Rise / fall times:</b> 7ns / 7ns max	■	
<b>Frequency adjustment:</b> Control voltage (pin 1) ±4ppm min, 2.5V ±2.5V Variable resistor (pins 1 to 7) ±4ppm min, 0 ~ 10kΩ	<input type="checkbox"/> <input type="checkbox"/>	V5 R1
<b>Supply voltage (<math>V_{DD}</math>):</b> +12.0V (±0.5V)	■	
<b>Input current:</b> 30mA max @ +30°C 45mA max @ -20°C	■ ■	
<b>Warm up:</b> within spec after 30s @ 0°C current 250mA max during 10s	■ ■	
<b>Phase noise (typ @ 10MHz):</b> -90dBc/Hz @ 10Hz -120dBc/Hz @ 100Hz -130dBc/Hz @ 1kHz -135dBc/Hz @ 10kHz	■ ■ ■ ■	
<b>Shock &amp; vibration:</b> 2,000G, 0.3ms ½-sine 10.0 ~ 2,000Hz, 10G	■ ■	
<b>Package:</b> Through hole 14 pin DIL 25x22mm SMD carrier PCB Formed leads SMD	■ <input type="checkbox"/> <input type="checkbox"/>	D1 D2

■ Standard. □ Optional - Please specify required code(s) when ordering

## Ordering Information


Product name + option codes + frequency

eg: **MCOCXO-AR1 10.0MHz**


**MCOCXO-BV5 16.0MHz**

Option code X (eg MCOCXO/X) denotes a custom spec.

## Option D1

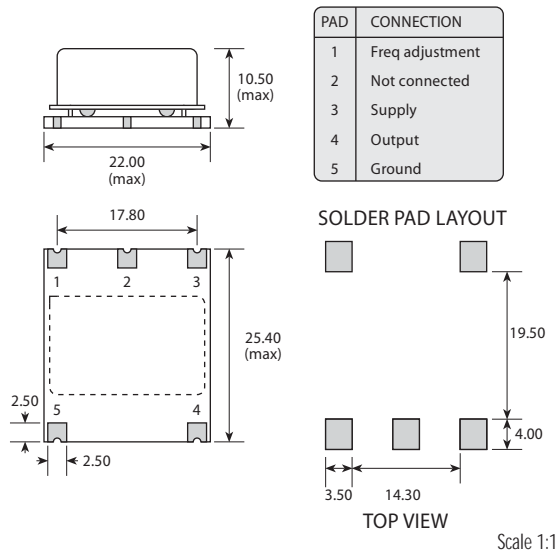

## Option D2

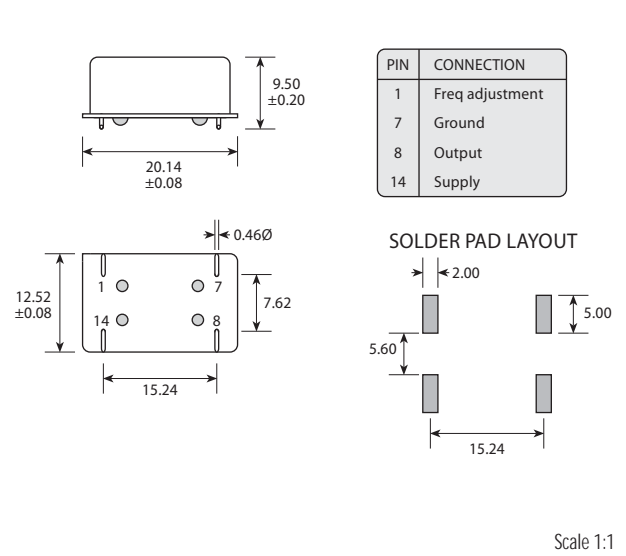

## Soldering Profile

