


### DIN 41622

Plug connectors according to DIN 41622 with solder contacts for wire or PCB termination.


Tripple row version

No of contacts 30  
 Leading contacts ---  
 Contact type DIN 41622/41618


F - Angled into spacing

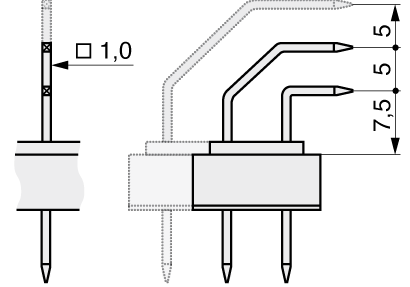


Material contact	Copper alloy
Plating contact	Au 0,8 μ
Material insulator	Thermoplast UL94V-0
Rated current	10,0 A
Withstand voltage	875 V <sub>RMS</sub> for 1 minute
Operating temperature	-20°C to +85°C
Max. processing temper.	230°C for 5 seconds
Packaging	Standard
A	83,00
B	65,00
C	74,00
D	74,00
E	66,00

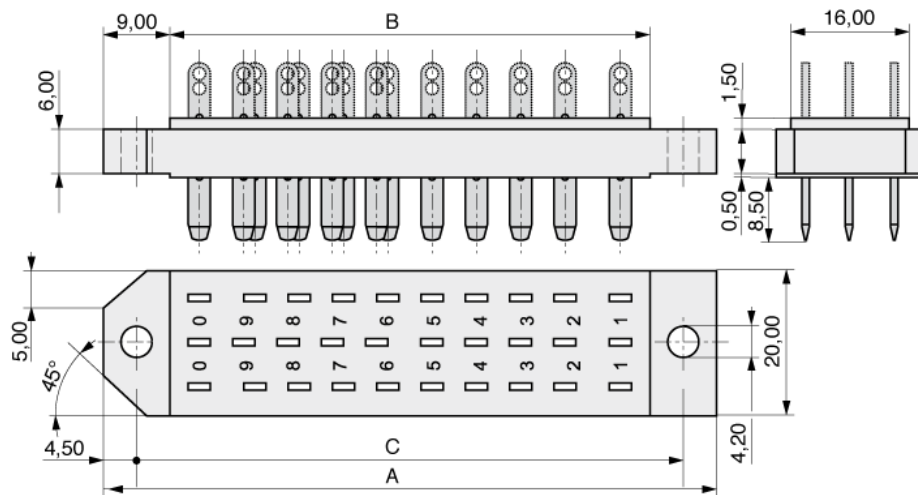


Mounting hole:

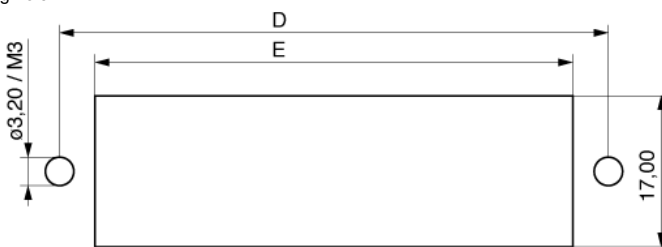

Footprint (contacts S,A,B):

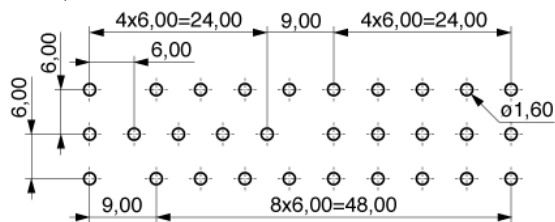

Footprint (contacts F):

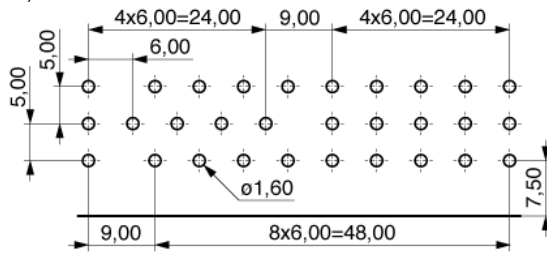

**Order code: 383-2-030-FKN-ZS**



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Date: 31.10.2018 Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=16&s\\_product=383-2-030-FKN-ZS](http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=383-2-030-FKN-ZS)