




















































Modular Terminal Blocks, with Push-buttons on one or both Sides with Fixing Flange or Snap-in Mounting Foot, Series 261







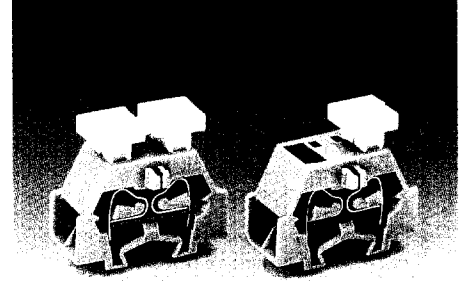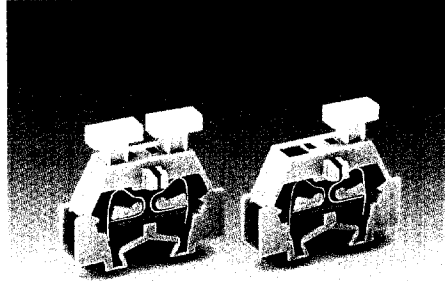













18 Side-entry

	0.08 – 2.5 mm² AWG 28 – 14 500 V/6 kV/3 ① 300 V, 15 A  24 A 300/600 V, 10/5 A ②	2 x 0.08 – 2.5 mm² 2 x AWG 28 – 14 500 V/6 kV/3 ① 300 V, 15 A  24 A 300/600 V, 10/5 A ②
	Terminal block width 6 mm / 0.236 in  8 – 9 mm / 0.33 in	Terminal block width 10 mm / 0.394 in  8 – 9 mm / 0.33 in
	*                              	*               



- ① 500 V = rated voltage
 6 kV = rated surge voltage
 3 = pollution degree
 (see also Section 10)

 Suitable for EEx i-applications

	Color	Item-No.	Pack.-unit pcs	Color	Item-No.	Pack.-unit pcs
with push-button on one side						
 Terminal blocks with fixing flange , for screw fixing or similar methods, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also for DIN 35 rail)		2-cond. term. bl. with push-button on one side			4-cond. term. bl. with push-button on one side	
	grey	261-301/331-000	200 (4 x 50)	grey	261-331/332-000	200 (4 x 50)
	light grey	261-303/331-000	200 (4 x 50)	light grey	261-333/332-000	200 (4 x 50)
	blue	261-304/331-000 	200 (4 x 50)	blue	261-334/332-000 	200 (4 x 50)
	orange	261-306/331-000	200 (4 x 50)	orange	261-336/332-000	200 (4 x 50)
	green-yellow	261-307/331-000	200 (4 x 50)	green-yellow	261-337/332-000	200 (4 x 50)
 Terminal blocks with snap-in mounting foot , for plate thickness 0.6 – 1.2 mm, fixing hole diameter 3.5 mm (fits aluminum rail 210-154 or with mounting adapter 209-120 for DIN 35 rail)		2-cond. term. bl. with push-button on one side			4-cond. term. bl. with push-button on one side	
	grey	261-311/331-000	200 (4 x 50)	grey	261-341/332-000	200 (4 x 50)
	light grey	261-313/331-000	200 (4 x 50)	light grey	261-343/332-000	200 (4 x 50)
	blue	261-314/331-000 	200 (4 x 50)	blue	261-344/332-000 	200 (4 x 50)
	orange	261-316/331-000	200 (4 x 50)	orange	261-346/332-000	200 (4 x 50)
	green-yellow	261-317/331-000	200 (4 x 50)	green-yellow	261-347/332-000	200 (4 x 50)
 End terminal block  , without fixing foot, for terminal strips with snap-in mounting feet (see dimensioned drawings on page 3.19 and example of an assembly on page 3.51.)		2-cond. term. bl. with push-button on one side			4-cond. term. bl. with push-button on one side	
	grey	261-321/331-000	200 (4 x 50)	grey	261-351/332-000	200 (4 x 50)
	light grey	261-323/331-000	200 (4 x 50)	light grey	261-353/332-000	200 (4 x 50)
	blue	261-324/331-000 	200 (4 x 50)	blue	261-354/332-000 	200 (4 x 50)
	orange	261-326/331-000	200 (4 x 50)	orange	261-356/332-000	200 (4 x 50)
	green-yellow	261-327/331-000	200 (4 x 50)	green-yellow	261-357/332-000	200 (4 x 50)
with push-buttons on both sides						
 Terminal blocks with fixing flange , for screw fixing or similar methods, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also for DIN 35 rail)		2-cond. term. bl. with push-buttons on both sides			4-cond. term. bl. with push-buttons on both sides	
	grey	261-301/341-000	200 (4 x 50)	grey	261-331/342-000	200 (4 x 50)
	light grey	261-303/341-000	200 (4 x 50)	light grey	261-333/342-000	200 (4 x 50)
	blue	261-304/341-000 	200 (4 x 50)	blue	261-334/342-000 	200 (4 x 50)
	orange	261-306/341-000	200 (4 x 50)	orange	261-336/342-000	200 (4 x 50)
	green-yellow	261-307/341-000	200 (4 x 50)	green-yellow	261-337/342-000	200 (4 x 50)
 Terminal blocks with snap-in mounting foot , for plate thickness 0.6 – 1.2 mm, fixing hole diameter 3.5 mm (fits aluminum rail 210-154 or with mounting adapter 209-120 for DIN 35 rail)		2-cond. term. bl. with push-buttons on both sides			4-cond. term. bl. with push-buttons on both sides	
	grey	261-311/341-000	200 (4 x 50)	grey	261-341/342-000	200 (4 x 50)
	light grey	261-313/341-000	200 (4 x 50)	light grey	261-343/342-000	200 (4 x 50)
	blue	261-314/341-000 	200 (4 x 50)	blue	261-344/342-000 	200 (4 x 50)
	orange	261-316/341-000	200 (4 x 50)	orange	261-346/342-000	200 (4 x 50)
	green-yellow	261-317/341-000	200 (4 x 50)	green-yellow	261-347/342-000	200 (4 x 50)
 End terminal block  , without fixing foot, for terminal strips with snap-in mounting feet (see dimensioned drawings on page 3.19 and example of an assembly on page 3.51.)		2-cond. term. bl. with push-buttons on both sides			4-cond. term. bl. with push-buttons on both sides	
	grey	261-321/341-000	200 (4 x 50)	grey	261-351/342-000	200 (4 x 50)
	light grey	261-323/341-000	200 (4 x 50)	light grey	261-353/342-000	200 (4 x 50)
	blue	261-324/341-000 	200 (4 x 50)	blue	261-354/342-000 	200 (4 x 50)
	orange	261-326/341-000	200 (4 x 50)	orange	261-356/342-000	200 (4 x 50)
	green-yellow	261-327/341-000	200 (4 x 50)	green-yellow	261-357/342-000	200 (4 x 50)
Accessories for modular terminal blocks and terminal strips						
Mounting accessories	see pages 3.16 and 3.17			see pages 3.16 and 3.17		
Marking accessories	see page 8.24			see page 8.24		

* For international approvals (with corresponding ratings) see pages 10.3 – 10.38.