


ULTRA LOW LOSS HIGH POWER T / R SWITCH

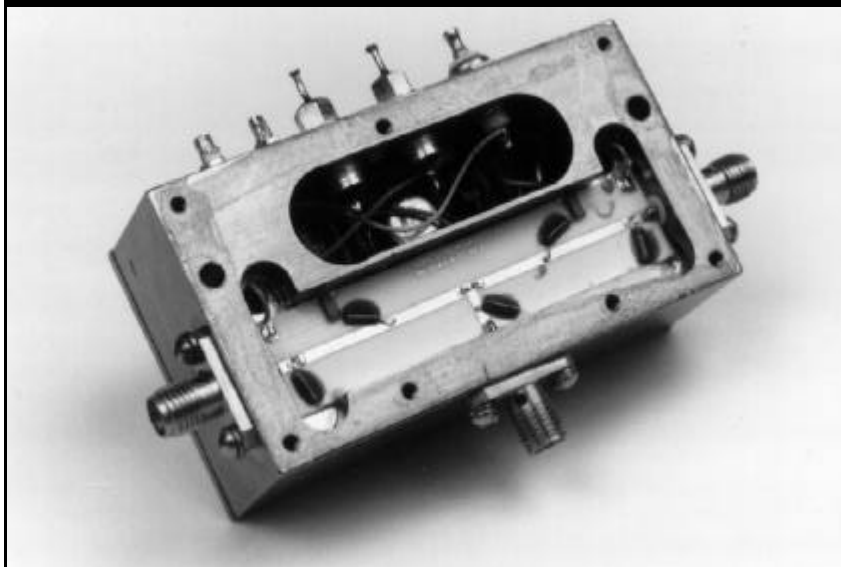

TYPICAL SPECIFICATIONS

Frequency Range	200 MHz - 1100 MHz min.
Insertion Loss	0.25 dB typ., 0.35 dB max.
Isolation, 200 - 600 MHz	50 dB min.
600 - 1100 MHz	40 dB min.
VSWR, common and passing ports	1.2:1 typ., 1.3:1 max.
RF Input Power, max.	50W CW or 100W peak, 25% D.F.
Control	TTL, 1 line
Switching Time (50% TTL to 90/10% RF)	1 μ sec typ., 2 μ sec max.
DC Power ($V \pm 5\%$)	+5V/100mA, - 100V/10 mA
RF Connectors	SMA (F)
DC and TTL Connectors	solder pins
Operating Temperature	-30° to +70° C
Dimensions	1.50"W x 2.75"L x 1.00"H
Part Number	D2R0211-45HP

DESCRIPTION

These switches are designed to provide the combination of low loss and high transmittal power so important in today's T/R applications. They are available in the 200 MHz to 1100 MHz frequency ranges, however, customer-specified frequency ranges are also available.

APPLICATIONS


- Military communication systems
- Commercial/industrial communication systems



VECTRONICS MICROWAVE CORP. / A Micronetics Company

26 Hampshire Dr. / Hudson, NH 03051 / Tel: 603-883-2900 / Fax: 603-882-8987 / www.micronetics.com

ULTRA LOW LOSS HIGH POWER T / R SWITCH

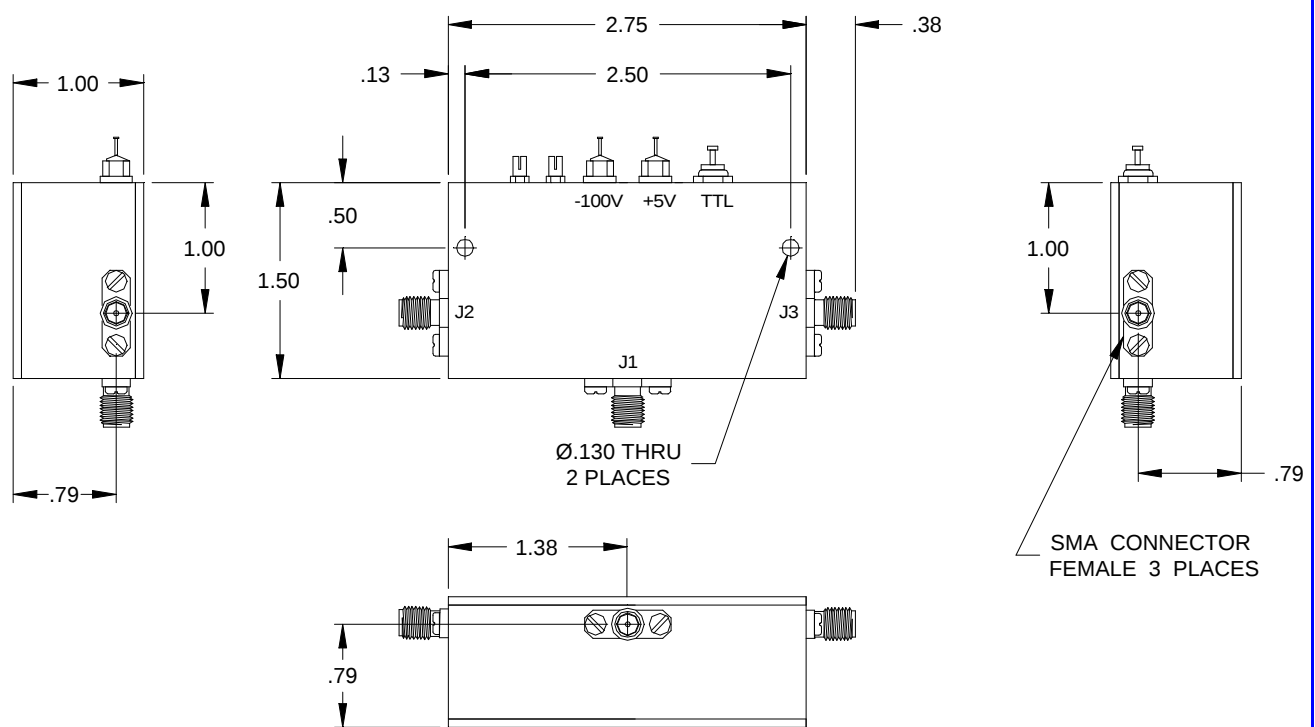

VECTRONICS MICROWAVE CORP. / A Micronetics Company

26 Hampshire Dr. / Hudson, NH 03051 / Tel: 603-883-2900 / Fax: 603-882-8987 / www.micronetics.com