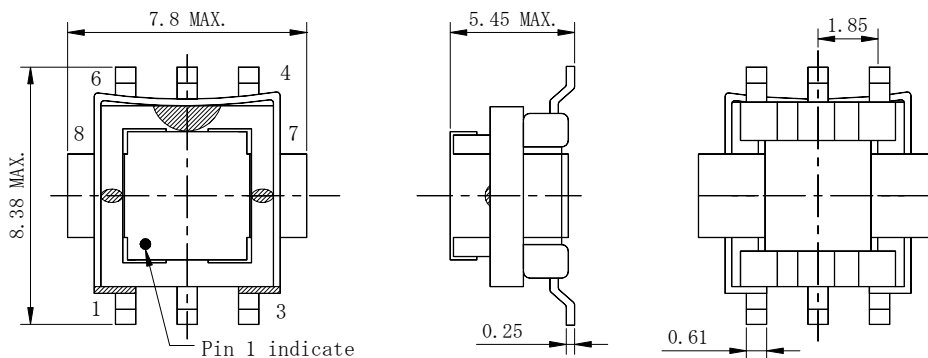




**Type: CEEH55**
**◆ Product Description**

- 8.38×7.8mm Max.(L×W), 5.45mm Max. Height .
- Custom design is available.

**◆ Feature**

- Low profile SMD type.
- Low primary DCR version.
- Current rating: up to 10A.
- Operating Frequency range: 50kHz~1MHz.
- RoHS Compliance


**◆ Dimensions (mm)**

**◆ Land Pattern**

**◆ Schematics (Bottom)**

**◆ Specification**

NO.	PART NO.	Turns Ratio	Inductance (mH) 1-3 [MIN.]	D.C.R.(mΩ) [at20°C] [MAX.]		Rated Current(A)	HI-POT (Vrms) 1,3to 7,8	STAMP
				8-7	1-3			
01	S020A	1:20	0.08	6	550	10	500	1
02	S030A	1:30	0.18	6	870	10	500	2
03	S040A	1:40	0.32	6	1140	10	500	3
04	S050A	1:50	0.50	6	1500	10	500	4
05	S060A	1:60	0.72	6	1750	10	500	5
06	S070A	1:70	0.98	6	4750	10	500	6
07	S100A	1:100	2.00	6	5500	10	500	7
08	S125A	1:125	3.00	6	6500	10	500	8
09	S150A	1:150	4.32	6	15400	10	500	9
10	S200A	1:200	8.00	6	32700	10	500	0