



Micro Commercial Components


Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

NPN
2N6515, 2N6517
PNP
2N6519, 2N6520

Features

- Through Hole Package
- 150°C Junction Temperature
- Voltage and Current are negative for PNP transistors
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

Pin Configuration
 Bottom View



High Voltage
Transistor
625mW


Mechanical Data

- Case: TO-92, Molded Plastic
- Polarity: indicated as above.

Maximum Ratings @ 25°C Unless Otherwise Specified

Charateristic	Symbol	Value	Unit
Collector-Emitter Voltage 2N6515 2N6519 2N6517, 2N6520	V_{CEO}	250 300 350	V
Collector-Base Voltage 2N6515 2N6519 2N6517, 2N6520	V_{CBO}	250 300 350	V
Emitter-Base Voltage 2N6515-6517 2N6519-6520	V_{EBO}	6.0 5.0	V
Base Current	I_B	250	mA
Collector Current(DC)	I_C	500	mA
Power Dissipation@TA=25°C	P_d	0.625 5.0	W mW/°C
Power Dissipation@TC=25°C	P_d	1.5 12	W mW/°C
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	°C/W
Operating & Storage Temperature	T_j, T_{STG}	-55~150	°C

TO-92

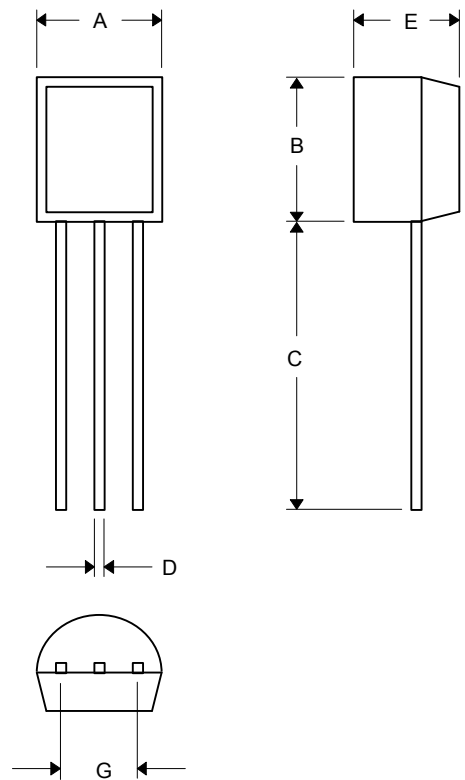

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.175	.185	4.45	4.70	
B	.175	.185	4.46	4.70	
C	.500	---	12.7	---	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	

NPN 2N6515 2N6517 PNP 2N6519 2N6520



Micro Commercial Components

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector–Emitter Breakdown Voltage ⁽¹⁾ (I _C = 1.0 mA _{dc} , I _B = 0)	V _{(BR)CEO}	250 300 350	— — —	V _{dc}
Collector–Base Breakdown Voltage (I _C = 100 μA _{dc} , I _E = 0)	V _{(BR)CBO}	250 300 350	— — —	V _{dc}
Emitter–Base Breakdown Voltage (I _E = 10 μA _{dc} , I _C = 0)	V _{(BR)EBO}	6.0 5.0	— —	V _{dc}
Collector Cutoff Current (V _{CB} = 150 V _{dc} , I _E = 0) (V _{CB} = 200 V _{dc} , I _E = 0) (V _{CB} = 250 V _{dc} , I _E = 0)	I _{CBO}	— — —	50 50 50	nA _{dc}
Emitter Cutoff Current (V _{EB} = 5.0 V _{dc} , I _C = 0) (V _{EB} = 4.0 V _{dc} , I _C = 0)	I _{EBO}	— —	50 50	nA _{dc}
ON CHARACTERISTICS⁽¹⁾				
DC Current Gain (I _C = 1.0 mA _{dc} , V _{CE} = 10 V _{dc})	h _{FE}	35 30 20	— — —	—
(I _C = 10 mA _{dc} , V _{CE} = 10 V _{dc})		50 45 30	— — —	
(I _C = 30 mA _{dc} , V _{CE} = 10 V _{dc})		50 45 30	300 270 200	
(I _C = 50 mA _{dc} , V _{CE} = 10 V _{dc})		45 40 20	220 200 200	
(I _C = 100 mA _{dc} , V _{CE} = 10 V _{dc})		25 20 15	— — —	
Collector–Emitter Saturation Voltage (I _C = 10 mA _{dc} , I _B = 1.0 mA _{dc}) (I _C = 20 mA _{dc} , I _B = 2.0 mA _{dc}) (I _C = 30 mA _{dc} , I _B = 3.0 mA _{dc}) (I _C = 50 mA _{dc} , I _B = 5.0 mA _{dc})	V _{CE(sat)}	— — — —	0.30 0.35 0.50 1.0	V _{dc}
Base–Emitter Saturation Voltage (I _C = 10 mA _{dc} , I _B = 1.0 mA _{dc}) (I _C = 20 mA _{dc} , I _B = 2.0 mA _{dc}) (I _C = 30 mA _{dc} , I _B = 3.0 mA _{dc})	V _{BE(sat)}	— — —	0.75 0.85 0.90	V _{dc}
Base–Emitter On Voltage (I _C = 100 mA _{dc} , V _{CE} = 10 V _{dc})	V _{BE(on)}	—	2.0	V _{dc}

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

NPN 2N6515 2N6517
PNP 2N6519 2N6520



ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Max	Unit
SMALL-SIGNAL CHARACTERISTICS				
Current-Gain — Bandwidth Product ⁽¹⁾ ($I_C = 10 \text{ mAdc}$, $V_{CE} = 20 \text{ Vdc}$, $f = 20 \text{ MHz}$)	f_T	40	200	MHz
Collector-Base Capacitance ($V_{CB} = 20 \text{ Vdc}$, $I_E = 0$, $f = 1.0 \text{ MHz}$)	C_{cb}	—	6.0	pF
Emitter-Base Capacitance ($V_{EB} = 0.5 \text{ Vdc}$, $I_C = 0$, $f = 1.0 \text{ MHz}$)	C_{eb}	—	80	pF
			100	

SWITCHING CHARACTERISTICS

Turn-On Time ($V_{CC} = 100 \text{ Vdc}$, $V_{BE(off)} = 2.0 \text{ Vdc}$, $I_C = 50 \text{ mAdc}$, $I_{B1} = 10 \text{ mAdc}$)	t_{on}	—	200	μs
Turn-Off Time ($V_{CC} = 100 \text{ Vdc}$, $I_C = 50 \text{ mAdc}$, $I_{B1} = I_{B2} = 10 \text{ mAdc}$)	t_{off}	—	3.5	μs

1. Pulse Test: Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$.

NPN 2N6515 2N6517
PNP 2N6519 2N6520

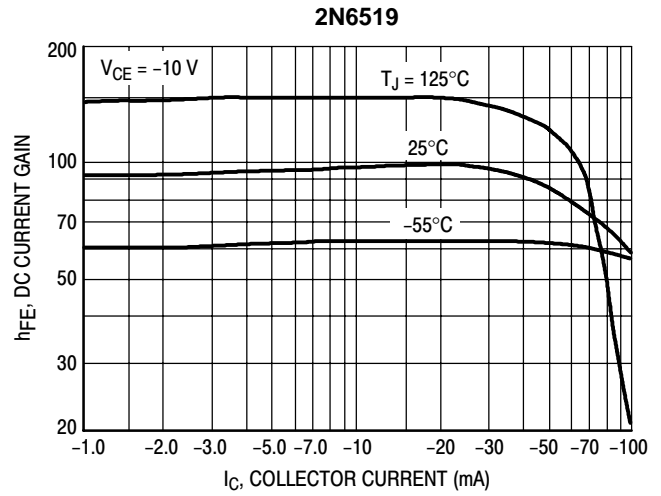
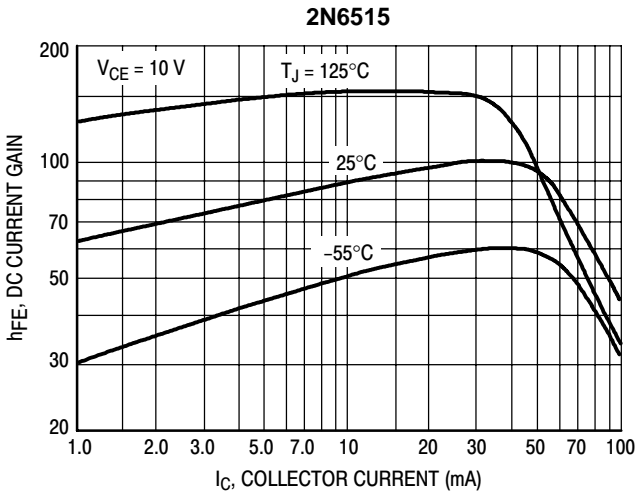


Figure 1. DC Current Gain

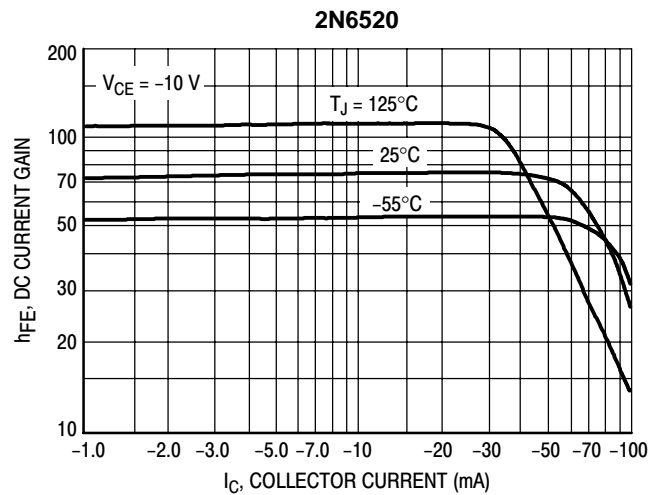
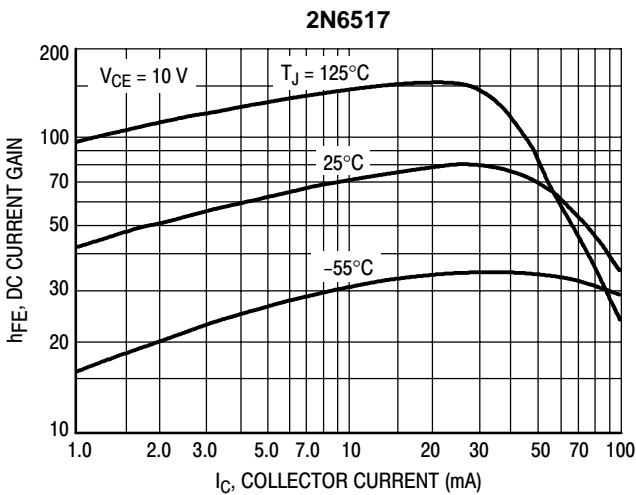


Figure 2. DC Current Gain

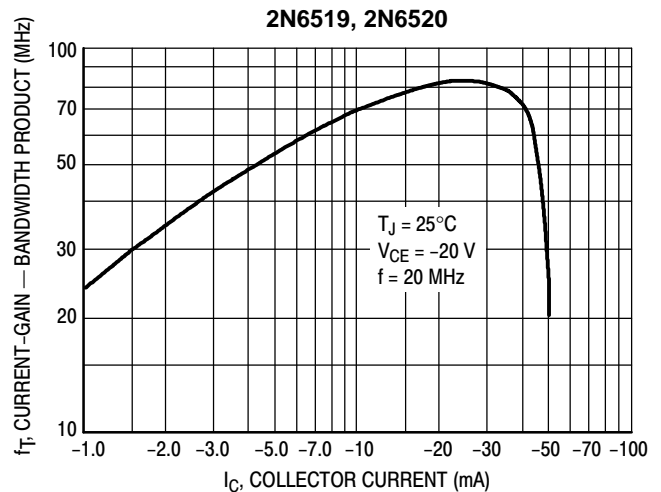
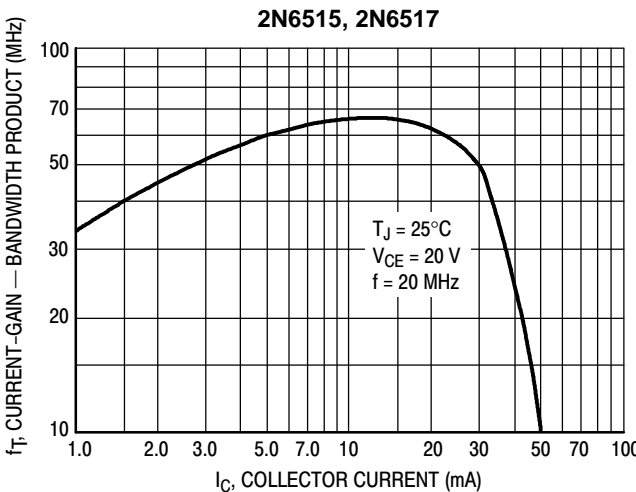


Figure 3. Current-Gain — Bandwidth Product

NPN 2N6515 2N6517
PNP 2N6519 2N6520

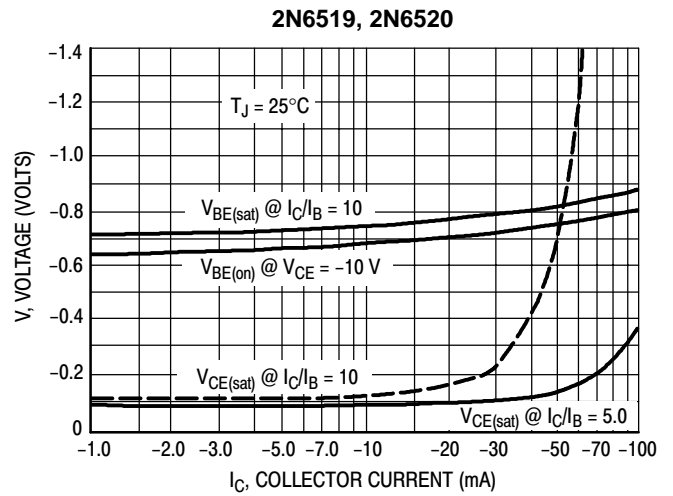
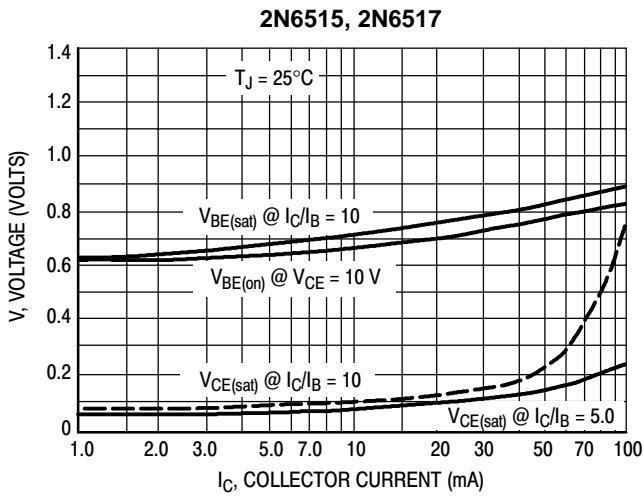


Figure 4. "On" Voltages

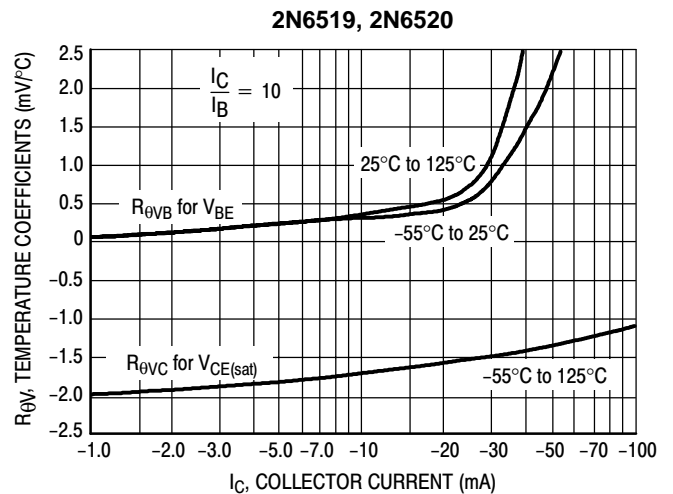
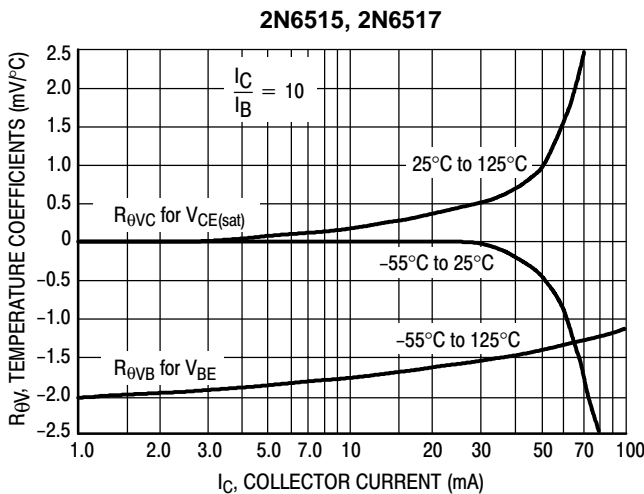


Figure 5. Temperature Coefficients

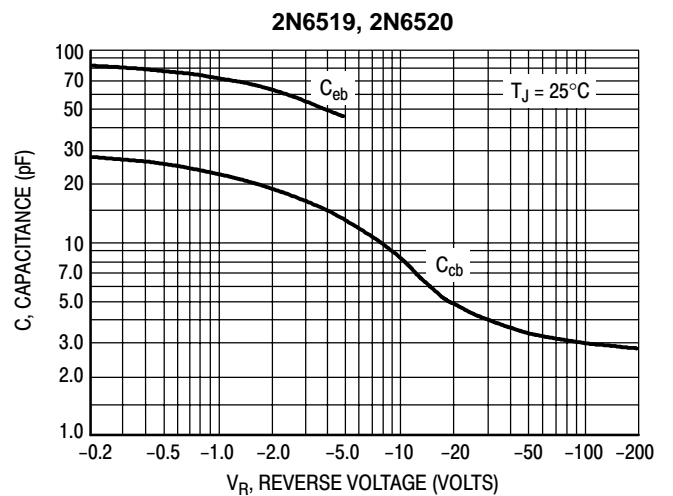
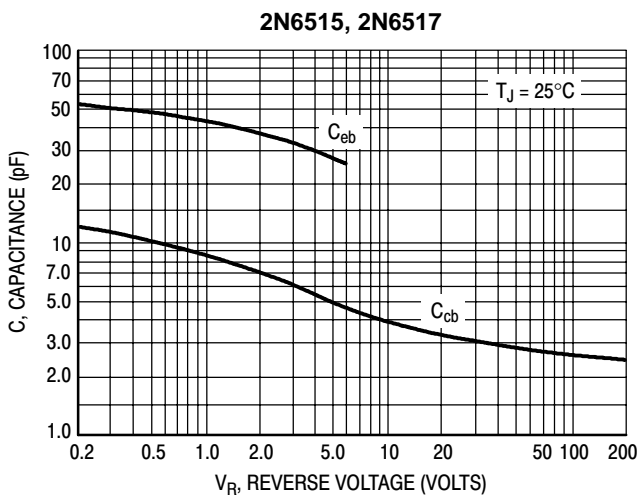


Figure 6. Capacitance

NPN 2N6515 2N6517
 PNP 2N6519 2N6520

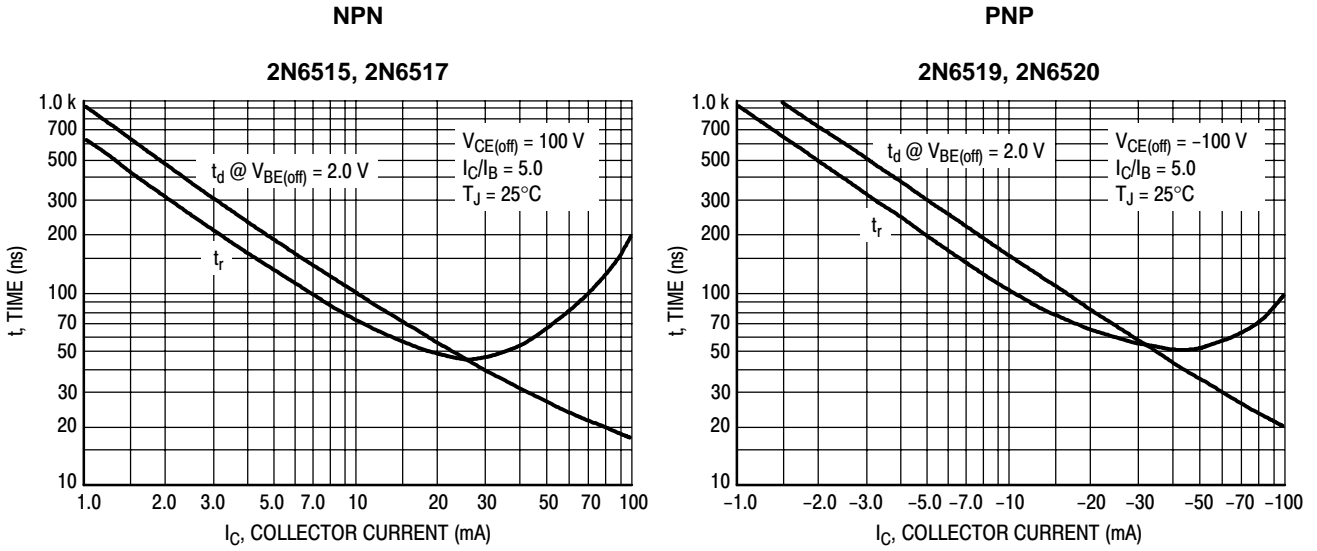


Figure 7. Turn-On Time

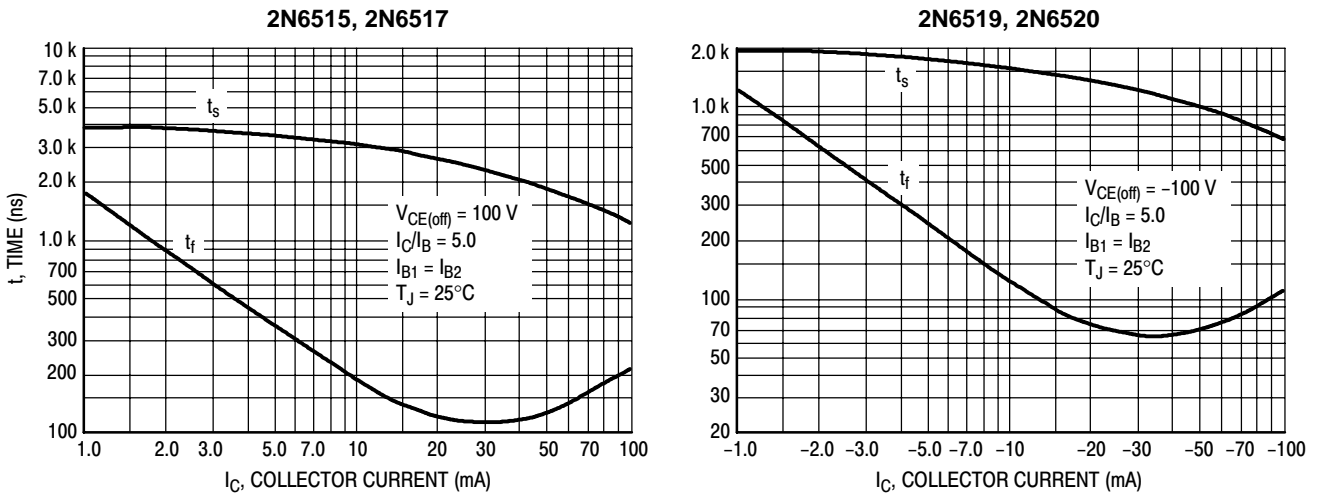


Figure 8. Turn-Off Time



TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.