


SPECIFICATIONS



Voltage rating: 250VAC/VDC
 Current rating: 5 amps AC/DC
 Contact material: Brass
 Contact plating: Tin
 Contact resistance: 10 milliohms max.
 Housing material: LCP
 Withstanding: 1,500VAC/1 min.
 Operating temperature: -25°C to +85°C

Dimensions		
Pos.	A	B
2	—	6.65
4	3.0	9.65
6	6.0	12.65
8	9.0	15.65
10	12.0	18.65
12	15.0	21.65
14	18.0	24.65
16	21.0	27.65
18	24.0	30.65
20	27.0	33.65
22	30.0	36.65
24	33.0	39.65

Board lock option

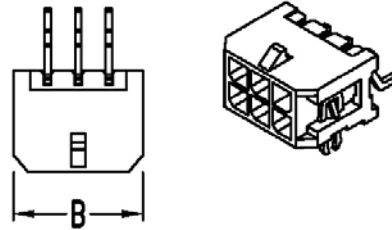

Mounting tab option

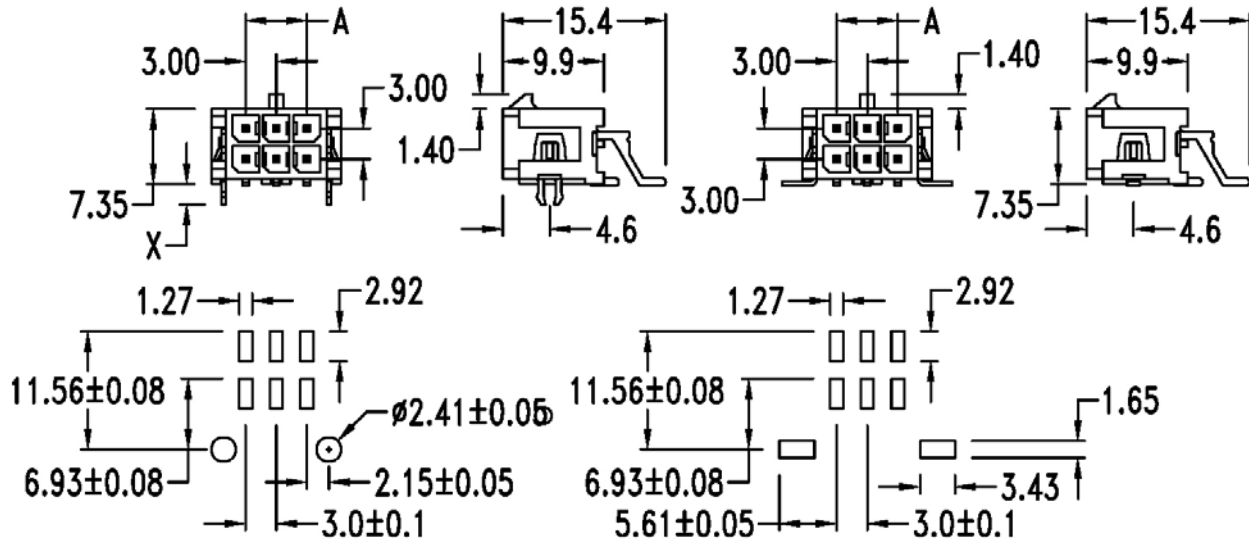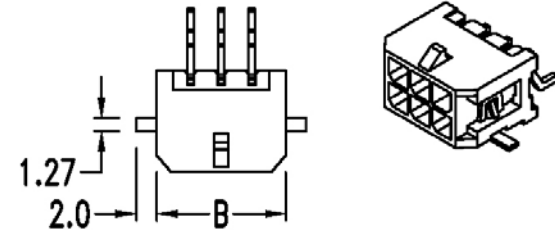

PCB Layout: component side

PCB Layout: component side

Through Hole Available

RoHS compliant

Series	Type	Positions	Mounting	Options
JS-A	3048	XX	SM	XX
Pluggable Connector	3048 series .118" (3.0mm) wire-to-board header	2-24	SM=Surface Mount	BL1=2mm board lock BL2=3.2mm board lock MT=Mounting tab

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT/ PN	3/23/09	Greg	Approved	Howard	10/05/05
				Checked	Lizzy	10/05/05
				Drawn	Tina	10/05/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3048-XX-SM-XX**

Description: .118" (3.0mm) right angle header, surface mount