



YH1440/1441 Series OCXO

10 MHz – 100 MHz

(Rev C)

GREENRAY INDUSTRIES, INC.


PRECISION QUARTZ TECHNOLOGY

Miniature SMT Package
Stratum 3 Compliant

SPECIFICATIONS


Frequency	10.0 MHz to 100.0 MHz										
Output	YH1440 - Squarewave, AC MOS YH1441 - Sinewave, 0dBm min into 50ohms										
Harmonics	-20dBc (Sinewave version)										
Temp Stability	<table border="0"> <tr> <td>Temp Range</td> <td>Tolerance</td> </tr> <tr> <td>0 to +50°C</td> <td>$\pm 1 \times 10^{-7}$</td> </tr> <tr> <td>-10 to +60°C</td> <td>$\pm 1.5 \times 10^{-7}$</td> </tr> <tr> <td>-20 to +70°C</td> <td>$\pm 2 \times 10^{-7}$</td> </tr> <tr> <td>-40 to +70°C</td> <td>$\pm 5 \times 10^{-7}$</td> </tr> </table>	Temp Range	Tolerance	0 to +50°C	$\pm 1 \times 10^{-7}$	-10 to +60°C	$\pm 1.5 \times 10^{-7}$	-20 to +70°C	$\pm 2 \times 10^{-7}$	-40 to +70°C	$\pm 5 \times 10^{-7}$
Temp Range	Tolerance										
0 to +50°C	$\pm 1 \times 10^{-7}$										
-10 to +60°C	$\pm 1.5 \times 10^{-7}$										
-20 to +70°C	$\pm 2 \times 10^{-7}$										
-40 to +70°C	$\pm 5 \times 10^{-7}$										
Freq vs. Supply Aging	$\pm 3 \times 10^{-9}$ for a 5% change $\pm 2 \times 10^{-9}$ per day after 30 days (10 MHz typ)										
Input Voltage	available in +15, +12, +5, & +3.3VDC										
Input Power	Warmup - <5W for 5 minutes Idle - 2.0W max @ +25°C										
Phase Noise (typ @ 100 MHz)	<table border="0"> <tr> <td>10 Hz</td> <td>-80 dBc/Hz</td> </tr> <tr> <td>100 Hz</td> <td>-110 dBc/Hz</td> </tr> <tr> <td>1 kHz</td> <td>-140 dBc/Hz</td> </tr> <tr> <td>10 kHz</td> <td>-155 dBc/Hz</td> </tr> <tr> <td>100 kHz</td> <td>-160 dBc/Hz</td> </tr> </table>	10 Hz	-80 dBc/Hz	100 Hz	-110 dBc/Hz	1 kHz	-140 dBc/Hz	10 kHz	-155 dBc/Hz	100 kHz	-160 dBc/Hz
10 Hz	-80 dBc/Hz										
100 Hz	-110 dBc/Hz										
1 kHz	-140 dBc/Hz										
10 kHz	-155 dBc/Hz										
100 kHz	-160 dBc/Hz										
Frequency Adjust	± 5.0 ppm typ, positive slope 0 to +3.3 or +5.0V EFC										

- Option**
- B17
 - G157
 - N27
 - S57

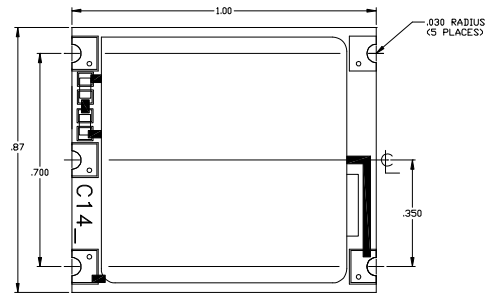


Ordering Example:

YH1440-N27-5-100.0MHz
(Model-Stability-Input V-Freq)

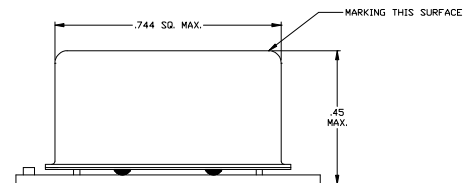

Pad Connections

- 1 - EFC
- 2 - N/C
- 3 - Supply V
- 4 - Output
- 5 - 0V/Gnd

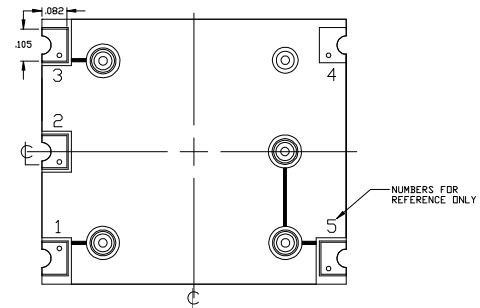

To inquire about available custom parameters, please contact us at sales@greenrayindustries.com.

840 West Church Rd., Mechanicsburg, PA 17055

Tel: 717-766-0223 Fax: 717-790-9509

www.greenrayindustries.com email: sales@greenrayindustries.com