


- ◇Absolute maximum ratings ($T_a = 25^{\circ}\text{C}$)

This product is not designed for anti-radiation applications.

*2 To use at a temperature higher than $T_a=25^{\circ}\text{C}$, derate 13mW per 1°C
(At mounting 50mm x 58mm x 1.75mm glass epoxy board.)

Parameter	Symbol	Limits	Unit	Remark
Digital power supply voltage	DVDD	2.7~3.6	V	DVDD ≤ MVCC
Driver power supply voltage	MVCC	2.7~5.5	V	MVCC12, MVCC34, MVCC567, MVCC8, VDDAMP
clock operating frequency	FCLK	1~28	MHz	Reference clock


◇Block Diagram

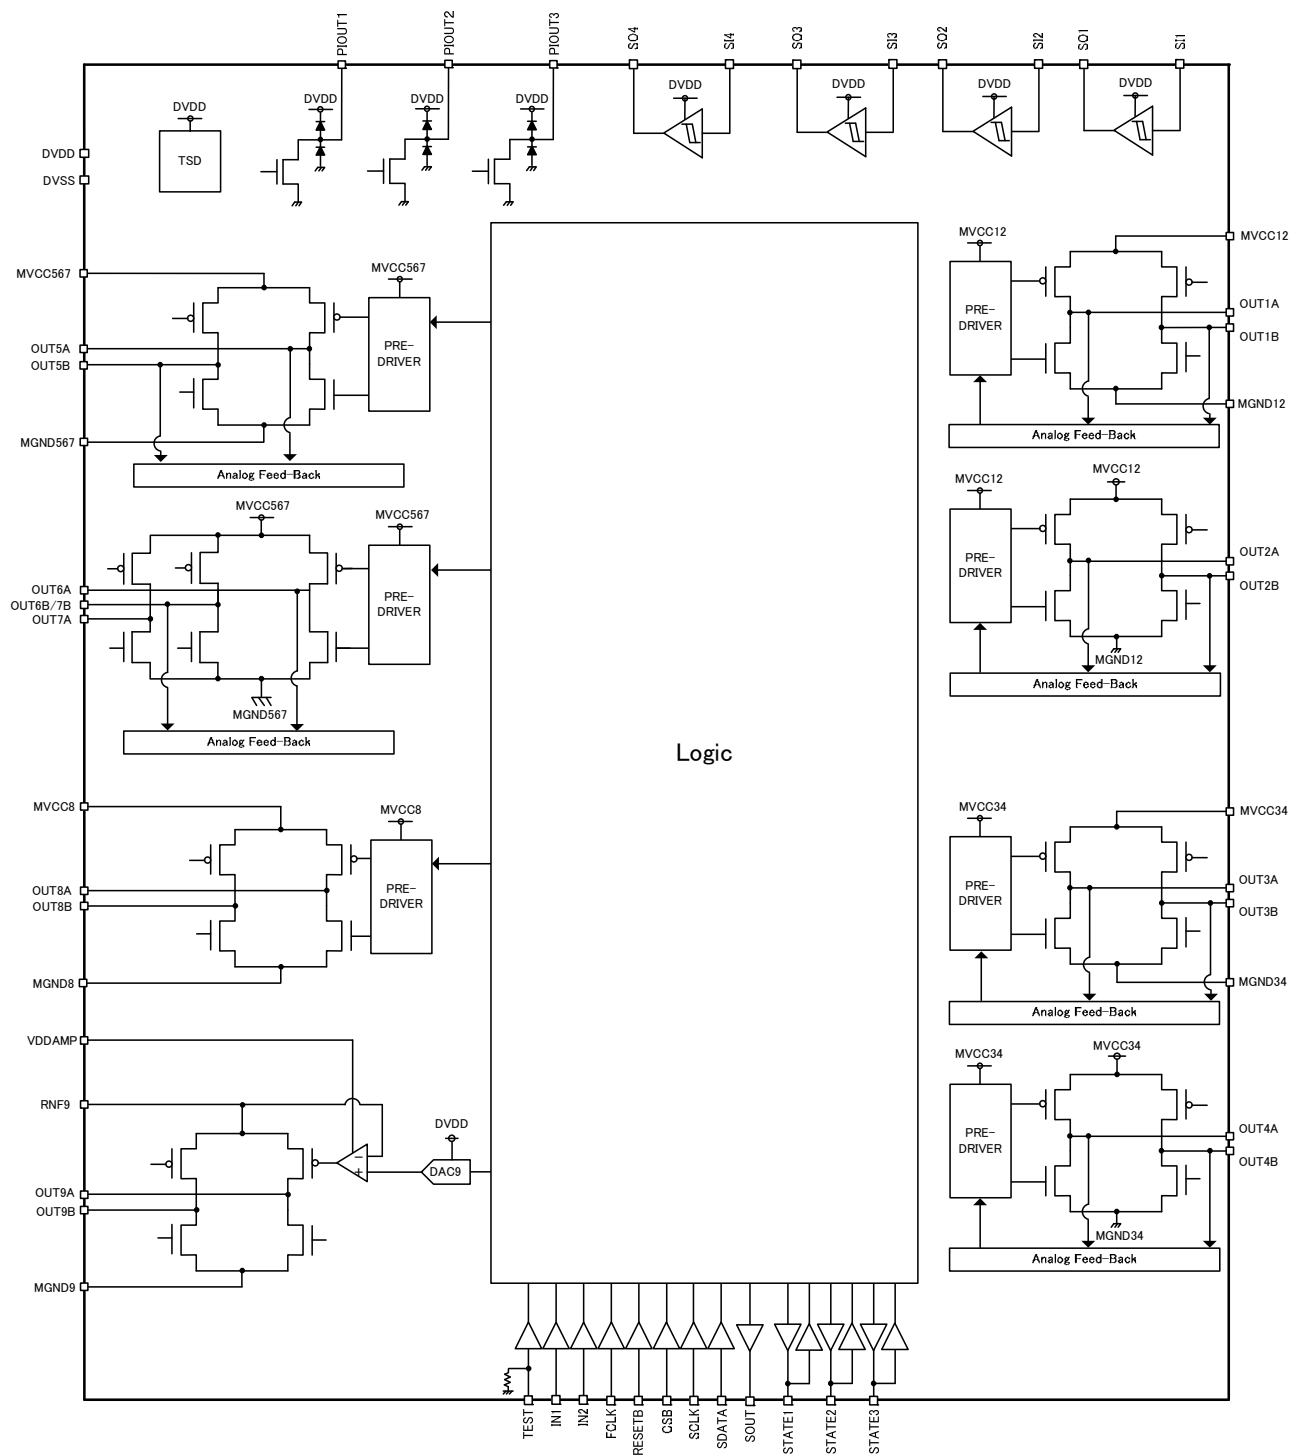


◇Pin functions

Land Matrix No.	Pin name	Power supply	Function
H8	DVDD	-	Digital power supply
H9	DVSS	-	ground
G2	RESETB	DVDD	RESETB logic input
H4	FCLK	DVDD	FCLK logic input
E2	CSB	DVDD	CSB logic input
H3	SCLK	DVDD	SCLK logic input
D2	SDATA	DVDD	SDATA logic input
H5	SOUT	DVDD	SOUT logic output
E8	IN1	DVDD	IN1 logic input
F8	IN2	DVDD	IN2 logic input
G9	STATE1	DVDD	STATE1 logic input/output
G8	STATE2	DVDD	STATE2 logic input/output
H6	STATE3	DVDD	STATE3 logic input/output
J9	TEST	DVDD	TEST logic input
H7	PIOUT1	DVDD	PI driving output 1
F2	PIOUT2	DVDD	PI driving output 2
C2	PIOUT3	DVDD	PI driving output 3
B3	SI1	DVDD	Waveforming input1
B4	SO1	DVDD	Waveforming output1
B5	SI2	DVDD	Waveforming input2
B6	SO2	DVDD	Waveforming output2
B7	SI3	DVDD	Waveforming input3
A8	SO3	DVDD	Waveforming output3
D8	SI4	DVDD	Waveforming input4
C8	SO4	DVDD	Waveforming output4
C9	MVCC12	-	1ch, 2ch Driver power supply
E9	MGND12	-	1ch, 2ch Driver ground
A9, B8	OUT1A	MVCC12	1ch Driver A output
B9	OUT1B	MVCC12	1ch Driver B output
D9	OUT2A	MVCC12	2ch Driver A output
F9	OUT2B	MVCC12	2ch Driver B output
A2	MVCC34	-	3ch, 4ch Driver power supply
A7	MGND34	-	3ch, 4ch Driver ground
A3	OUT3A	MVCC34	3ch Driver A output
A4	OUT3B	MVCC34	3ch Driver B output
A5	OUT4A	MVCC34	4ch Driver A output
A6	OUT4B	MVCC34	4ch Driver B output
J8	MVCC567	-	5ch, 6ch, 7ch Driver power supply
J4	MGND567	-	5ch, 6ch, 7ch Driver ground
J7	OUT5A	MVCC567	5ch Driver A output
J6	OUT5B	MVCC567	5ch Driver B output
J3	OUT6A	MVCC567	6ch Driver A output
J2	OUT6B/7B	MVCC567	6ch, 7ch Driver B output
J5	OUT7A	MVCC567	7ch Driver A output
H1	MVCC8	-	8ch Driver power supply
G1	MGND8	-	8ch Driver ground
H2, J1	OUT8A	MVCC8	8ch Driver A output
F1	OUT8B	MVCC8	8ch Driver B output
B1	VDDAMP	-	9ch Power supply of current driver control
A1, B2	RNF9	-	9ch Driver power supply
E1	MGND9	-	9ch Driver ground
D1	OUT9A	RNF9	9ch Driver A output
C1	OUT9B	RNF9	9ch Driver B output

◇Outline dimensions/Marking figure

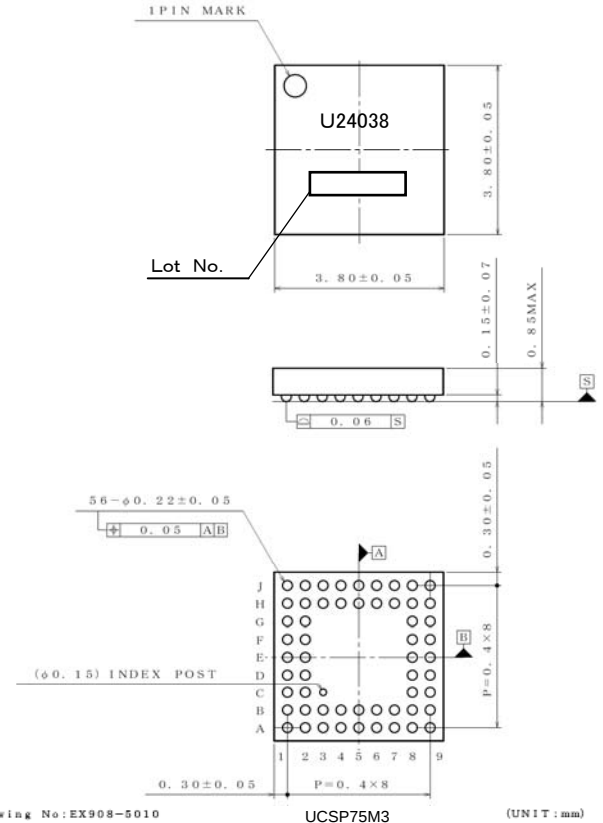

◇Pin assignment diagram (bottom view)

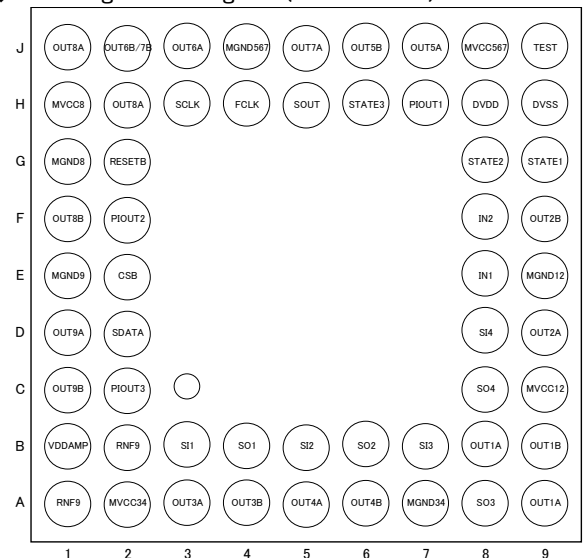

◇Cautions on use

(1) Absolute maximum ratings

If applied voltage, operating temperature range, or other absolute maximum ratings are exceeded, the LSI may be damaged. Do not apply voltages or temperatures that exceed the absolute maximum ratings. If you expect that any voltage or temperature could be exceeding the absolute maximum ratings, take physical safety measures such as fuses to prevent any conditions exceeding the absolute maximum ratings from being applied to the LSI.

(2) GND potential

Maintain the GND pin at the minimum voltage even under any operating conditions.

Actually check to be sure that none of the pins have voltage lower than that of GND pin, including transient phenomena.

(3) Thermal design

With consideration given to the permissible dissipation under actual use conditions, perform thermal design so that adequate margins will be provided.

(4) Short circuit between pins and malfunctions

To mount the LSI on a board, pay utmost attention to the orientation and displacement of the LSI. Faulty mounting to apply a voltage to the LSI may cause damage to the LSI. Furthermore, the LSI may also be damaged if any foreign matters enter between pins, between pin and power supply, or between pin and GND of the LSI.

(5) Operation in strong magnetic field

Make a thorough evaluation on use of the LSI in a strong magnetic field. Not doing so may malfunction the LSI.

(*) It is not possible to use corner pin only. (Corner pins are A1, A9, and J1.) Please short A1-B2, A9-B8, J1-H2 or use B2, B8, H2 only.

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>