


Traps for TV/VCR

BGS Traps



MKTGA Series

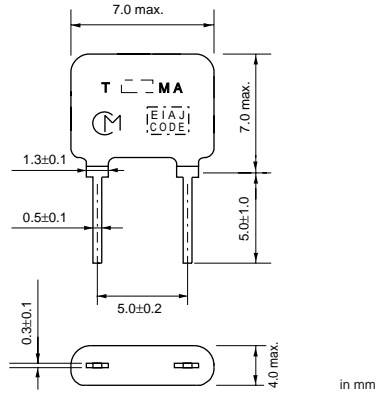

in mm


Part Number	Nominal Center Frequency (fn) (MHz)	Attenuation at fp (dB)	Attenuation at fs (dB)	6dB Bandwidth (kHz)	10dB Bandwidth (kHz)
MKTGA30M0AALP00B05	30.0	-	2 max.	-	±65 min.
MKTGA30M9AALP00B05	30.9	-	2 max.	-	±65 min.
MKTGA31M2AALP00B05	31.2	-	2 max.	-	±65 min.
MKTGA31M5AALP00B05	31.5	-	2 max.	-	±65 min.
MKTGA31M9AALP00B05	31.9	-	2 max.	-	±65 min.
MKTGA32M0AALP00B05	32.0	-	2 max.	-	±65 min.
MKTGA39M5AAHP00B05	39.5	2 max.	-	-	±65 min.
MKTGA39M7AALP00B05	39.75	2 max.	-	-	±65 min.
MKTGA40M4AAHP00B05	40.4	2 max.	-	-	±65 min.
MKTGA40M7AAHP00B05	40.7	2 max.	-	-	±65 min.
MKTGA40M9AAHP00B05	40.9	2 max.	-	-	±65 min.
MKTGA41M5AAHP00B05	41.5	2 max.	-	-	±65 min.
MKTGA47M2AAHP00B05	47.25	2 max.	-	-	±65 min.
MKTGA47M2CAHP00B05	47.25	0.5 max.	-	±45 min. (from fn) , 180kHz min. (total)	-
MKTGA60M2CAHP00B05	60.25	0.5 max.	-	±45 min. (from fn) , 180kHz min. (total)	-

SAW Filters for TV/VCR

● Lead Type



SAFHM Series

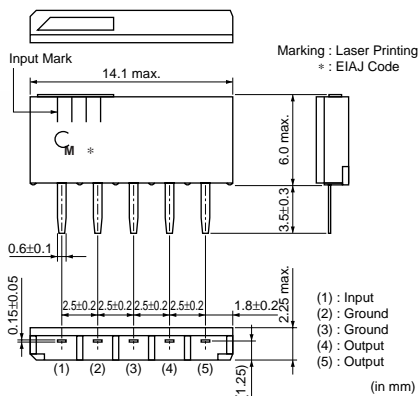

(in mm)

Part Number	Insertion Loss (dB)	Picture Carrier (dB)	Chroma Carrier (dB)	Sound Carrier (dB)	Adjacent Sound Carrier (dB)	Adjacent Picture Carrier (dB)	Spurious Response (1) (dB)	Spurious Response (2) (dB)
SAFHM41M2VEFZ00B03	16.0 max.	40 min.	17 min.	3 ±0.2	40 min.	35 min.	33 min. [0 to 39.75MHz]	33 min. [43.75 to 51.00MHz]
SAFHM54M2VEFZ00B03	16.0 max.	40 min.	22 min.	3 ±0.2	40 min.	26 min.	26 min. [0 to 52.75MHz]	30 min. [56.75 to 64.00MHz]

SAW Filters for Digital Broadcasting



SAW Filter (for IF)

● Chip Type


● Lead Type



SAFJB Series

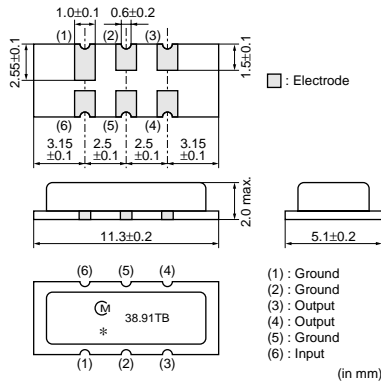


SAFHM Series

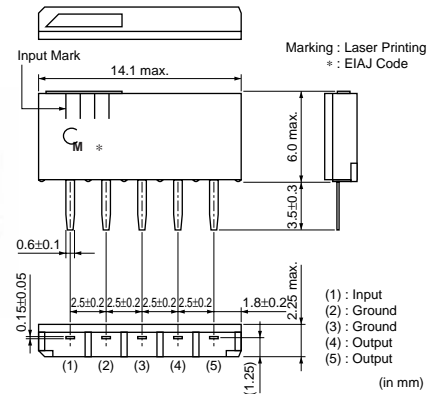

Part Number	Nominal Center Frequency (fn) (MHz)	System	Insertion Loss (dB)	3dB Bandwidth (MHz)	30dB Bandwidth (MHz)	Attenuation (1) (dB)
SAFJB38M9WTBZ00R10	38.912	DAB IF	20.0 max.	1.4 min.	2.9 max.	-
SAFHM44M0WTHZL0B03	44.0	US DTV IF	19.5 max.	5.8 typ.	6.7 typ.	21 max./47.25MHz
SAFHM44M0WTJZL0B03	44.0	US DTV IF	19.5 max.	5.6 typ.	6.6 typ.	24 max./47.25MHz

BGS Filters



Marking : $\overline{E}25,0\overline{C}A$
 ©: Vendor's Code
 * : EIAJ Monthly code
 in mm

Part Number	Center Frequency(fo) (MHz)	3dB Bandwidth (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)	Input/Output Impedance (ohm)
MKFGA25M0HA0P00B05	25 ±60kHz	within 220 ±50kHz	5 max.	30 min.	50

Area of Spurious Attenuation: [Range : 23MHz to (fo-400kHz)]