


GSD

KH-59-66

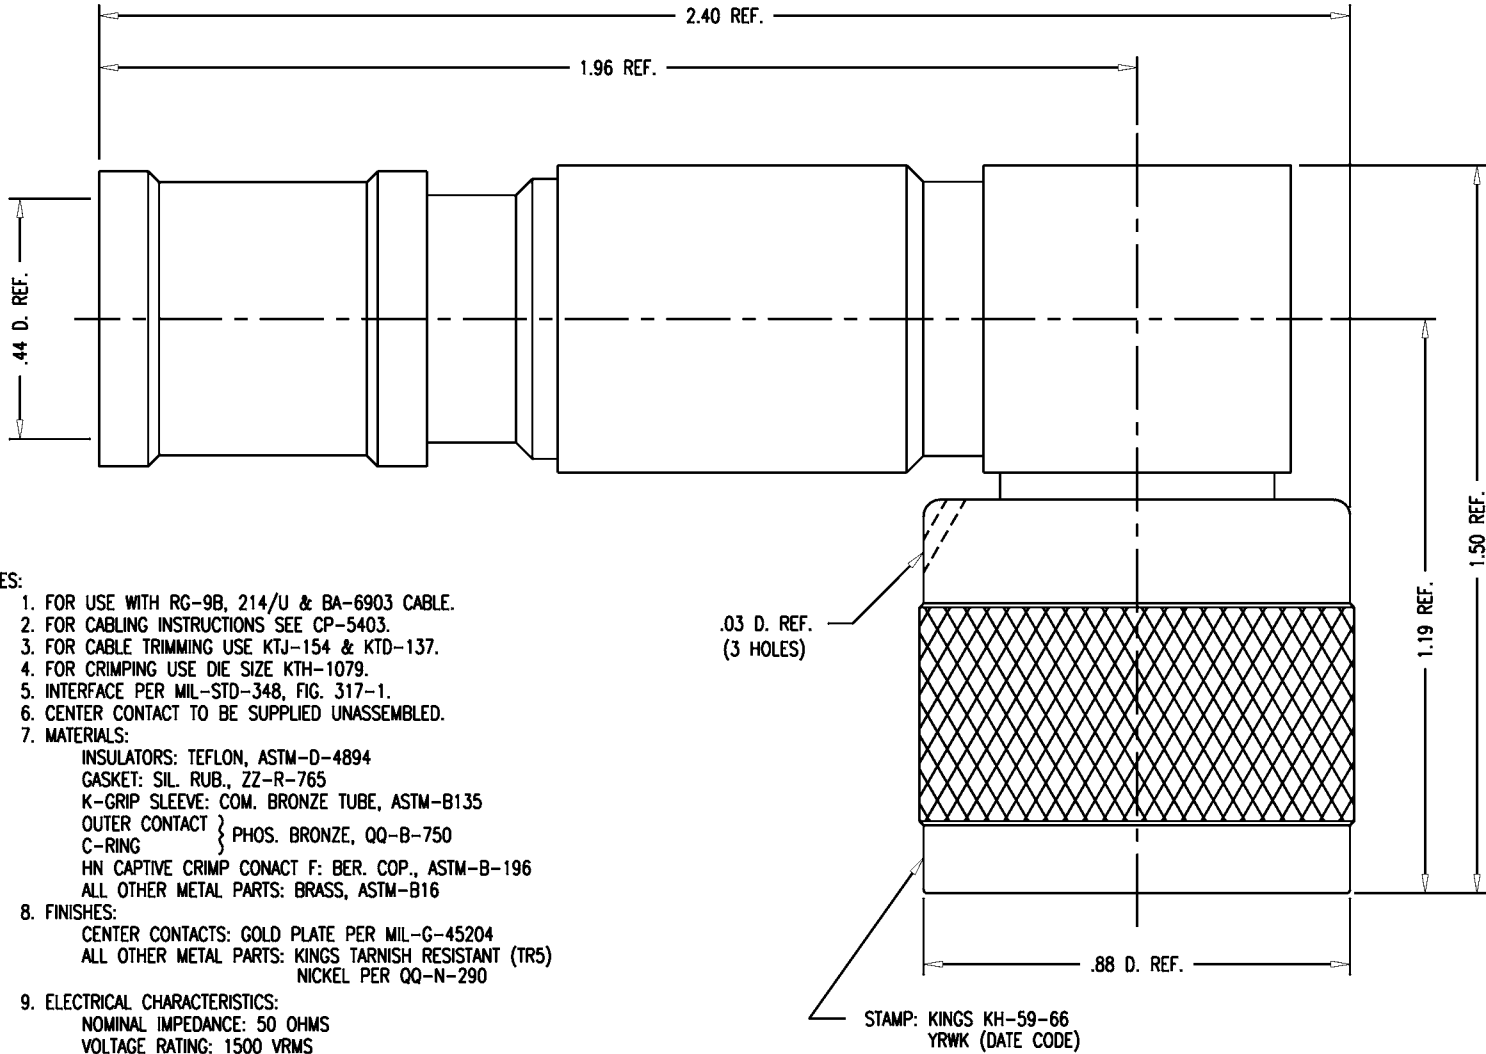

NOTES:

1. FOR USE WITH RG-9B, 214/U & BA-6903 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-5403.
3. FOR CABLE TRIMMING USE KTJ-154 & KTD-137.
4. FOR CRIMPING USE DIE SIZE KTH-1079.
5. INTERFACE PER MIL-STD-348, FIG. 317-1.
6. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
7. MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-4894
 - GASKET: SIL. RUB., ZZ-R-765
 - K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM-B135
 - OUTER CONTACT } PHOS. BRONZE, QQ-B-750
 - C-RING }
 - HN CAPTIVE CRIMP CONTACT F: BER. COP., ASTM-B-196
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
8. FINISHES:
 - CENTER CONTACTS: GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT (TR5) NICKEL PER QQ-N-290
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - VOLTAGE RATING: 1500 VRMS
 - FREQUENCY RANGE: DC TO 4 GHz

REVISIONS

ISSUE	CHANGES
0	ER 1501635765 JL 11/13/75
1	CN 15700 C MJB 04/20/76
2	CN 27623 C EAJ 03/17/86
3	CN 35664 C KH 08/09/94
4	CN 38029 E REDRAWN TML 07/24/00
5	CN 38086 E TML 09/05/00
6	CN 39307 B JLA 07/27/05

WAS:
VLS4310 KH5966S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, ANGLE, HN

DRAWN	JL	DATE	12/13/75
DESIGN	JL	DATE	12/13/75
APPR.	LI	DATE	12/13/75

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KH-59-66

GSD