

product: DELPHI PN 15458196

material: CUNISI

**SEALED**

surface: F.SN3

material thickness: 0,60 mm

cross section [mm<sup>2</sup>]: 13,0

strip length: 7,00 mm

cable type: STX

insulation ø [mm]: 6,63 - 6,89

seal: DPN 15470809


**Uncontrolled  
Copy  
For Information only!**

conductor dimension					crimp dimension [mm]						
cable type	cross sect. [mm <sup>2</sup> ]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation				
					height ± 0,10	width ± 0,10	height ± 0,20	width ± 0,20	height ± tol.	width ± tol.	
STX	13,0	75 x 0,45	6,76	1300	3,80	6,45	9,80	10,35			


core:  
C-6.25-6.5-24  
DPN 10783289

insulation:  
IS-10.00-5.0-24-A  
DPN 10805234

anvil:  
  
two piece anvil:  
AC-6.25-6.75  
DPN 10804779  
AI-10.00-7.2-2.0  
DPN 10764219

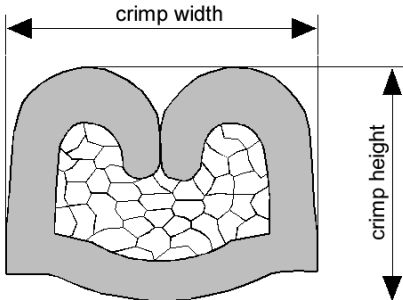

DELPHI PN 15458196

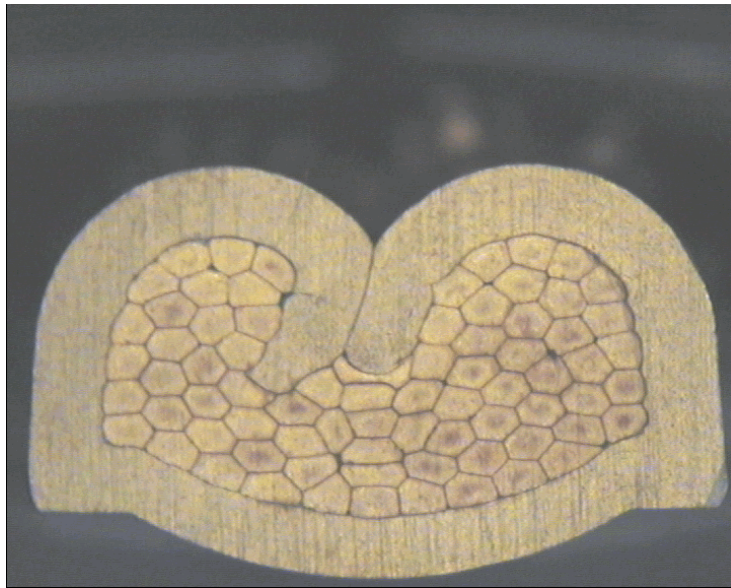

cable:

13,00 mm<sup>2</sup> = 75 x 0,45 mm

crimp height:

3,80 mm

crimp width:

6,45 mm