


EPA3923SE

- Transformer for Wideband Applications
- Miniature Surface Mount Package
- -3 dB Insertion Loss to 500 MHz
- Operating Temperature : -40°C to +85°C


Electrical Parameters @ 25° C

Frequency (MHz)	Insertion Loss (dB Min.)		Return Loss (dB Min.)				Impedance Ratio (±2%)
	@ .5-300 MHz	@ 1-100 MHz	@.4 MHz	@ 5 MHz	@ 50 MHz	@ 500 MHz	
@ .400-500	-2	-1	-15	-20	-20	-15	Pri. : Sec.
-3	-2	-1	-15	-20	-20	-15	75Ω : 75Ω

Schematic



Package

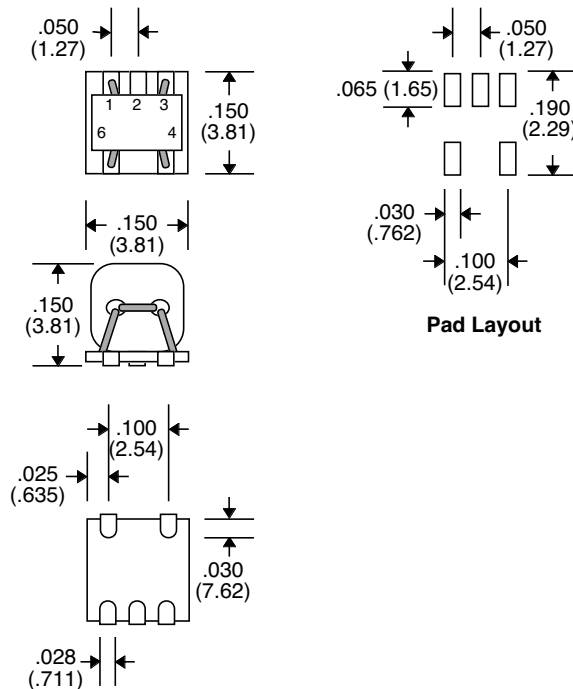

Unless Otherwise Specified Dimensions are in Inches /mm ±.010 /.25