



LOC		DIST		REVISIONS							
AJ		00		P	LTR	DESCRIPTION			DATE	DWN	APVD
					L1	REV PER ECO 06-029805			2/6/2007	DW	JL

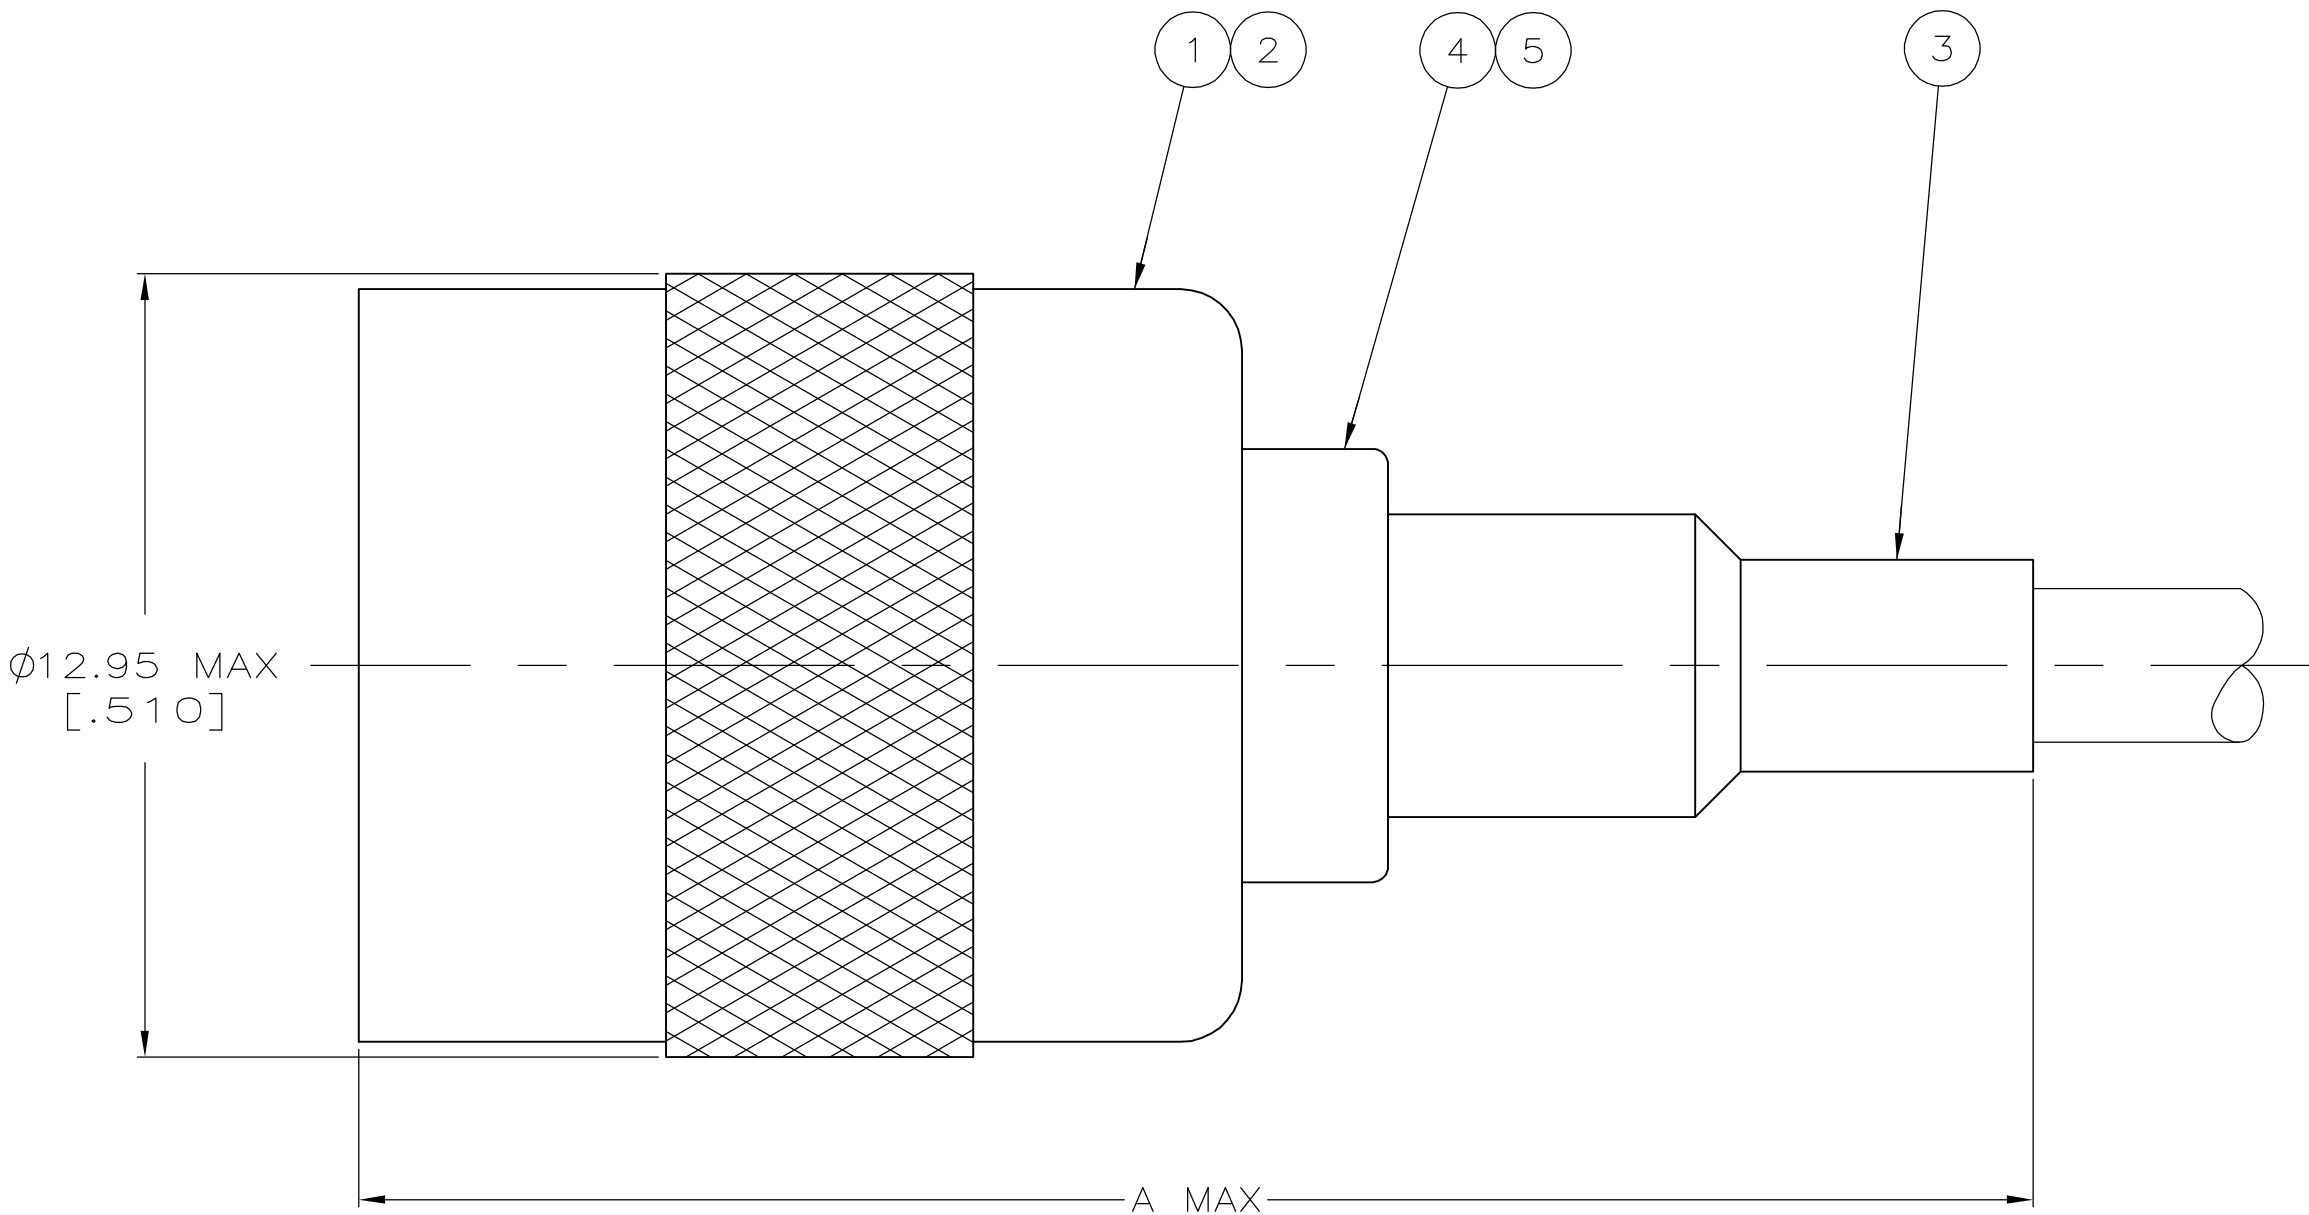

1. USE CRIMP TOOL 220190-1
2. USE INSTRUCTION SHEET 9540

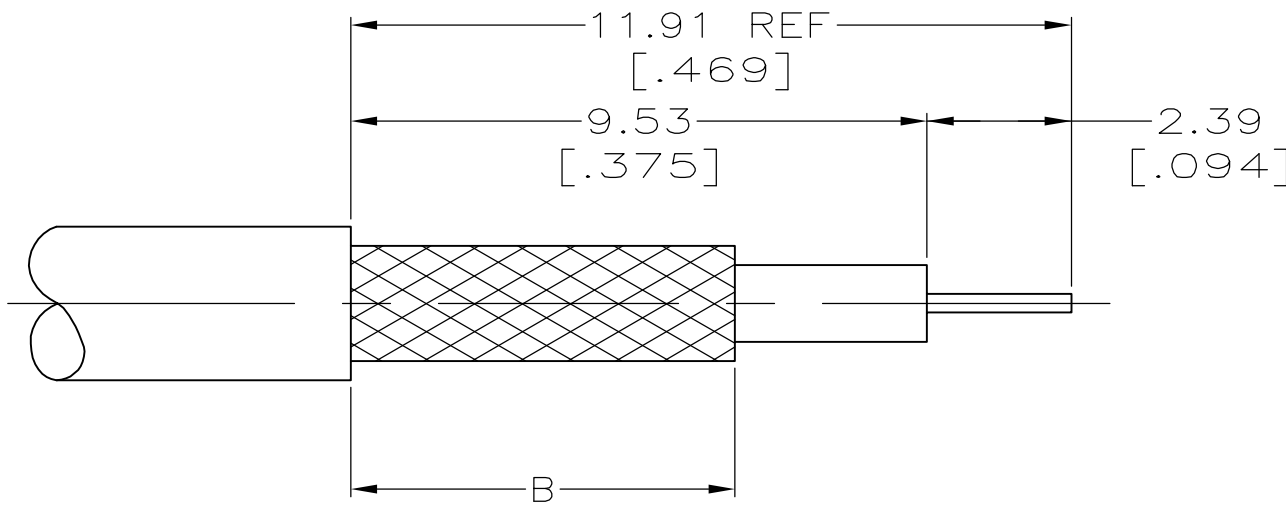

RECOMMENDED STRIP LENGTH

OBSOLETE	RG-59/U	6.35 [.250]	29.21 [1.150]	58085-1	-	-	9-50428-0	221182-2	221505-1	9-221506-0
	BELDEN 89248	6.35 [.250]	34.80 [1.370]	58086-1	-	-	9-50427-0	221182-8	221505-4	221506-6
	AT&T 735A	6.35 [.250]	29.46 [1.160]	58174-1	-	-	9-328666-2	221182-6	221505-3	221506-5
OBSOLETE	BELDEN 9145, AT&T 734A	6.35 [.250]	29.21 [1.150]	58085-1	-	-	9-50428-1	1-221182-0	221505-1	221506-4
	RG-179/U, 179A, 179B, 187/U, 187A	6.35 [.250]	29.46 [1.160]	58304-1	227194-2	222001-2	9-328666-0	1-221182-2	221505-3	221506-3
	BELDEN 9231, 8281	9.53 [.375]	34.29 [1.350]	220189-7	-	-	9-50427-2	1-221182-0	221505-2	221506-2
OBSOLETE	RG-59/U	6.35 [.250]	29.21 [1.150]	58085-1	-	-	9-50428-0	221182-2	221505-1	221506-1
	FOR USE WITH CABLE	B	A	DIE SET	5 TUBING, PLASTIC QTY=1	4 TUBING QTY=1	3 FERRULE QTY=1	2 CONTACT QTY=1	1 PLUG ASSEMBLY QTY=1	PART NUMBER