
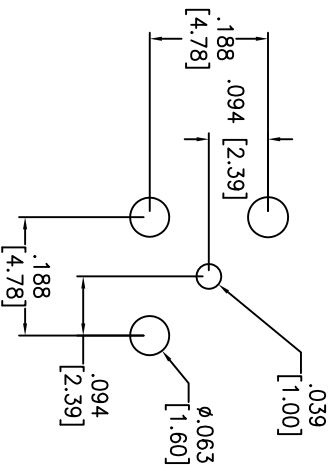
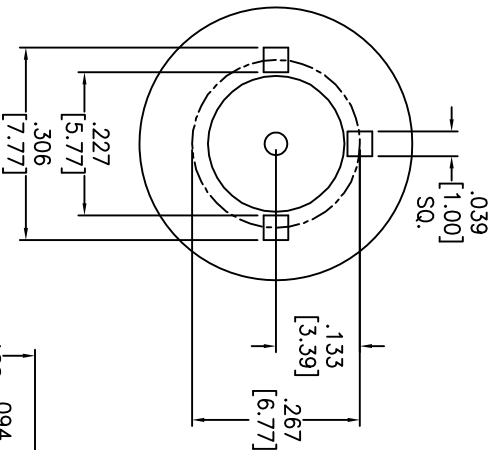


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/02/09	

APPROVED: _____

DATE: _____ TITLE: _____

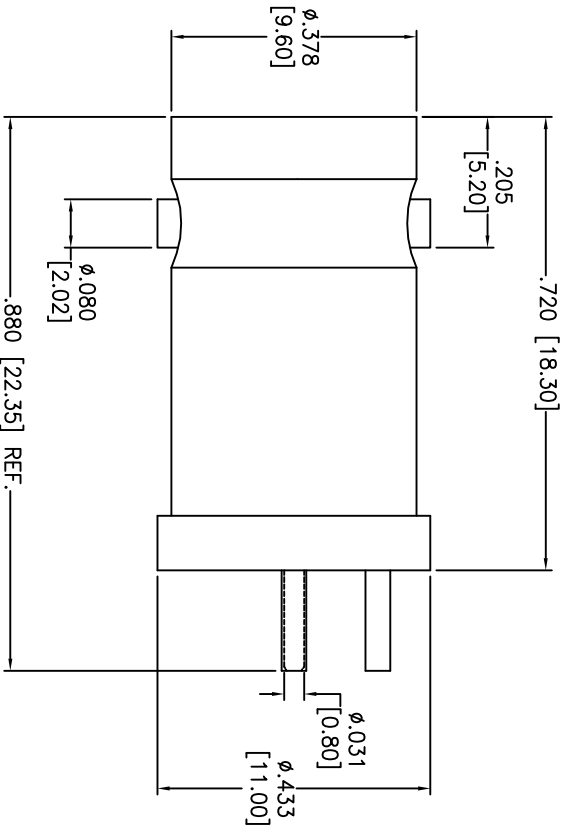

LOCK WASHER	BRASS	NICKEL
INSULATOR	TEFLON	NONE
CONTACT PIN	PHOSPHOR BRONZE	GOLD
BODY	BRASS	NICKEL
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: 0–4 GHz
 Working Voltage: 500 VRMS max.
 Dielectric Withstanding Voltage: 1500 VRMS min.
 Contact Resistance: 3 Milliohms max. (Center Contact)
 2 Milliohms max. (Outer Contact)
 Insulator Resistance: 5000 Megohms min.
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

BNC FEMALE; PCB MOUNT, 75 OHM

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X ± .10		Ø.X ± .10		TITLE			
.XX ± .020		Ø.XX ± .015					
.XXX ± .015		Ø.XXX ± .010					
APPROVALS		DATE					
DRAWN	DY	10/02/09		BNC FEMALE, PCB MOUNT, 75 OHM			
CHECKED							
APPROVED							
SIZE		PART NO.					
X		RF1-500-8					
REF.	S00064T	SCALE	NTS	SHEET		1 OF 1	