

DATA SHEET

74AHC32; 74AHCT32 Quad 2-input OR gate

Product specification
Supersedes data of 1999 Sep 27

2004 May 19

Quad 2-input OR gate

74AHC32; 74AHCT32

FEATURES

- ESD protection:
 - HBM EIA/JESD22-A114-B exceeds 2000 V
 - MM EIA/JESD22-A115-A exceeds 200 V
 - CDM EIA/JESD22-C101 exceeds 1000 V.
- Balanced propagation delays
- All inputs have Schmitt-trigger actions
- Inputs accepts voltages higher than V_{CC}
- For 74AHC32 only: operates with CMOS input levels
- For 74AHCT32 only: operates with TTL input levels
- Specified from $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ and $-40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$.

DESCRIPTION

The 74AHC32; 74AHCT32 is a high-speed Si-gate CMOS device and is pin compatible with low power Schottky TTL (LSTTL). It is specified in compliance with JEDEC standard No. 7A.

The 74AHC32; 74AHCT32 provides the 2-input OR function.

QUICK REFERENCE DATA

GND = 0 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; $t_r = t_f \leq 3.0\text{ ns}$.

SYMBOL	PARAMETER	CONDITIONS	TYPICAL		UNIT
			74AHC32	74AHCT32	
t_{PHL}/t_{PLH}	propagation delay nA, nB to nY	$C_L = 15\text{ pF}$; $V_{CC} = 5\text{ V}$	2.8	3.1	ns
C_I	input capacitance	$V_I = V_{CC}$ or GND	3.0	3.0	pF
C_O	output capacitance		4.0	4.0	pF
C_{PD}	power dissipation capacitance	$C_L = 50\text{ pF}$; $f = 1\text{ MHz}$; notes 1 and 2	10	12	pF

Notes

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:

f_i = input frequency in MHz;

f_o = output frequency in MHz;

C_L = output load capacitance in pF;

V_{CC} = supply voltage in Volts;

N = total load switching outputs;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of the outputs.

2. The condition is $V_I = \text{GND}$ to V_{CC} .

Quad 2-input OR gate

74AHC32; 74AHCT32

FUNCTION TABLE

Table 1 See note 1.

INPUT		OUTPUT
nA	nB	nY
L	L	L
L	H	H
H	L	H
H	H	H

Note

1. H = HIGH voltage level
L = LOW voltage level.

ORDERING INFORMATION

TYPE NUMBER	PACKAGE				
	TEMPERATURE RANGE	PINS	PACKAGE	MATERIAL	CODE
74AHC32D	−40 °C to +125 °C	14	SO14	plastic	SOT108-1
74AHCT32D	−40 °C to +125 °C	14	SO14	plastic	SOT108-1
74AHC32PW	−40 °C to +125 °C	14	TSSOP14	plastic	SOT402-1
74AHCT32PW	−40 °C to +125 °C	14	TSSOP14	plastic	SOT402-1
74AHC32BQ	−40 °C to +125 °C	14	DHVQFN14	plastic	SOT762-1
74AHCT32BQ	−40 °C to +125 °C	14	DHVQFN14	plastic	SOT762-1

PINNING

PIN	SYMBOL	DESCRIPTION
1	1A	data input
2	1B	data input
3	1Y	data output
4	2A	data input
5	2B	data input
6	2Y	data output
7	GND	ground (0 V)
8	3Y	data output
9	3A	data input
10	3B	data input
11	4Y	data output
12	4A	data input
13	4B	data input
14	V _{CC}	supply voltage

Quad 2-input OR gate

74AHC32; 74AHCT32

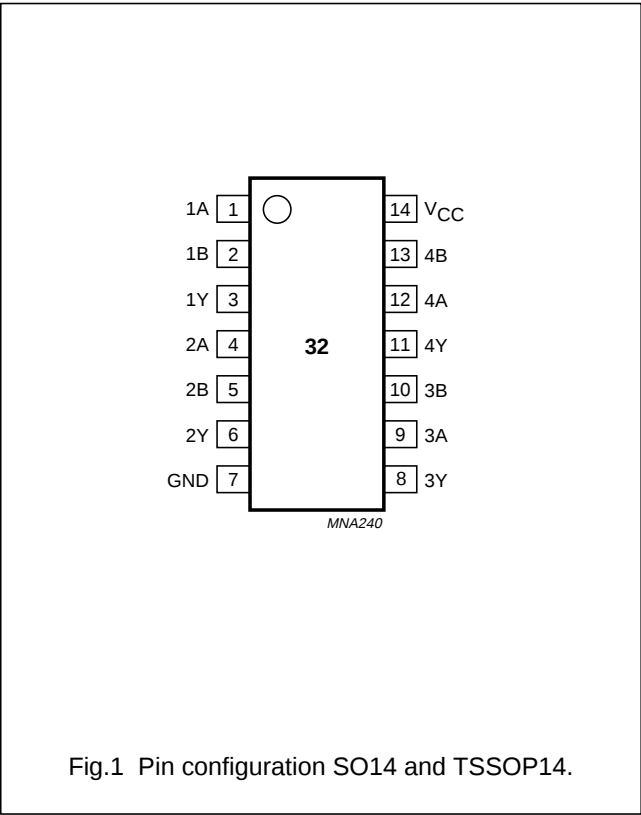


Fig.1 Pin configuration SO14 and TSSOP14.

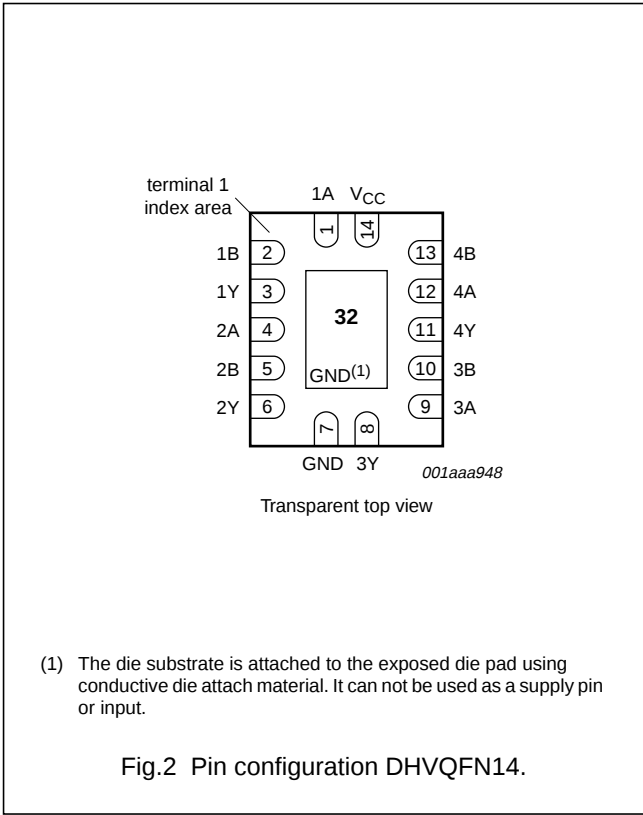


Fig.2 Pin configuration DHVQFN14.

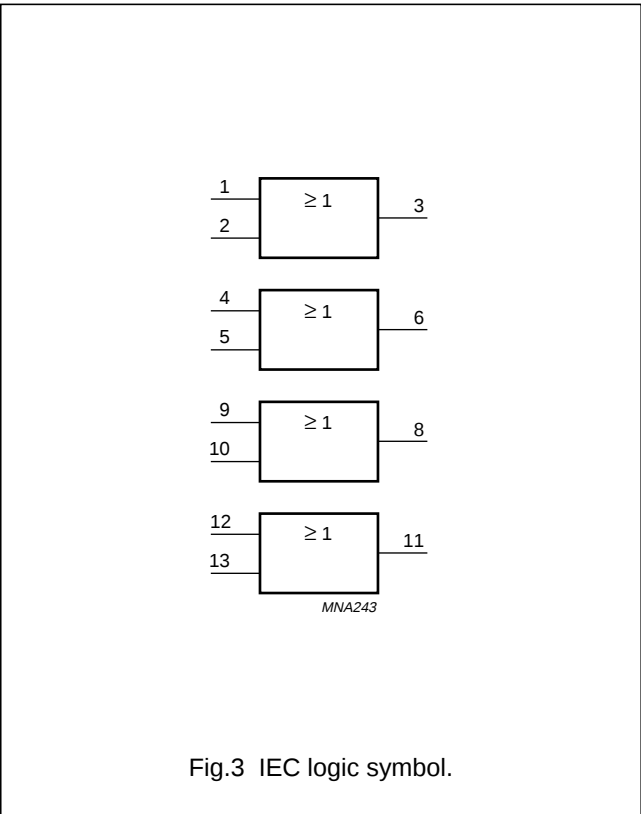


Fig.3 IEC logic symbol.

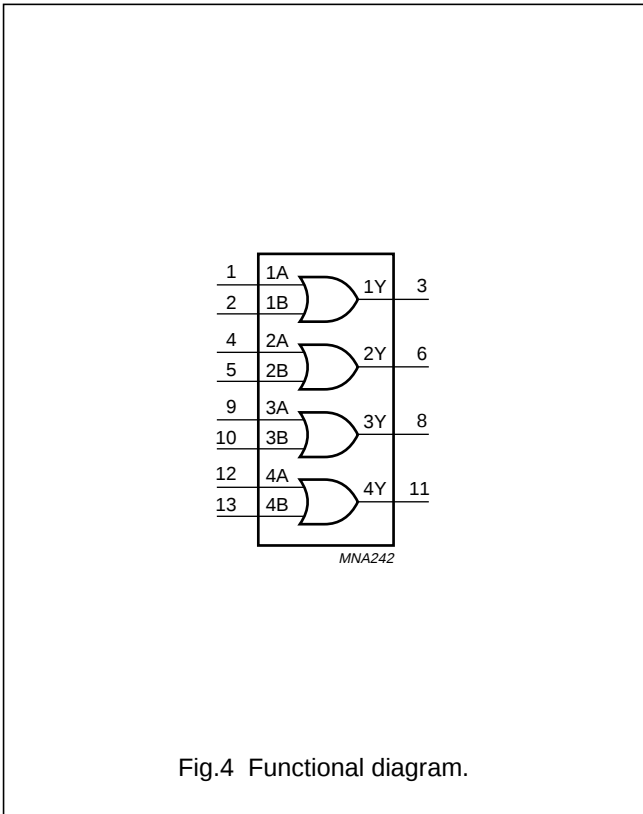


Fig.4 Functional diagram.

Quad 2-input OR gate

74AHC32; 74AHCT32

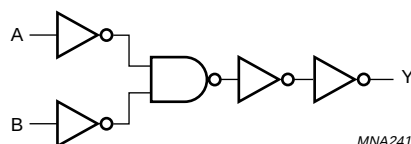


Fig.5 Logic diagram (one gate).

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	CONDITIONS	74AHC32			74AHCT32			UNIT
			MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
V_{CC}	supply voltage		2.0	5.0	5.5	4.5	5.0	5.5	V
V_I	input voltage		0	–	5.5	0	–	5.5	V
V_O	output voltage		0	–	V_{CC}	0	–	V_{CC}	V
T_{amb}	operating ambient temperature		–40	+25	+125	–40	+25	+125	°C
t_r, t_f	input rise and fall times	$V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$	–	–	100	–	–	–	ns/V
		$V_{CC} = 5\text{ V} \pm 0.5\text{ V}$	–	–	20	–	–	20	ns/V

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134); voltages are referenced to GND (ground = 0 V).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CC}	supply voltage		–0.5	+7.0	V
V_I	input voltage		–0.5	+7.0	V
I_{IK}	input diode current	$V_I < -0.5\text{ V}$; note 1	–	–20	mA
I_{OK}	output diode current	$V_O < -0.5\text{ V}$ or $V_O > V_{CC} + 0.5\text{ V}$; note 1	–	±20	mA
I_O	output source or sink current	$V_O > -0.5\text{ V}$ and $V_O < V_{CC} + 0.5\text{ V}$	–	±25	mA
I_{CC}, I_{GND}	V_{CC} or GND current		–	±75	mA
T_{stg}	storage temperature		–65	+150	°C
P_{tot}	power dissipation	$T_{amb} = -40\text{ °C}$ to $+125\text{ °C}$; note 2	–	500	mW

Notes

- The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
- For SO14 packages: above 70 °C the value of P_{tot} derates linearly with 8 mW/K.
For TSSOP14 packages: above 60 °C the value of P_{tot} derates linearly with 5.5 mW/K.
For DHVQFN14 packages: above 60 °C the value of P_{tot} derate linearly with 4.5 mW/K.

Quad 2-input OR gate

74AHC32; 74AHCT32

DC CHARACTERISTICS

Type 74AHC32

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		OTHER	V _{CC} (V)				
T _{amb} = 25 °C							
V _{IH}	HIGH-level input voltage		2.0	1.5	–	–	V
			3.0	2.1	–	–	V
			5.5	3.85	–	–	V
V _{IL}	LOW-level input voltage		2.0	–	–	0.5	V
			3.0	–	–	0.9	V
			5.5	–	–	1.65	V
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL} I _O = –50 μA; all outputs I _O = –50 μA; all outputs I _O = –50 μA; all outputs I _O = –4.0 mA I _O = –8.0 mA					
			2.0	1.9	2.0	–	V
			3.0	2.9	3.0	–	V
			4.5	4.4	4.5	–	V
			3.0	2.58	–	–	V
			4.5	3.94	–	–	V
V _{OL}	LOW-level output voltage	V _I = V _{IH} or V _{IL} I _O = 50 μA; all outputs I _O = 50 μA; all outputs I _O = 50 μA; all outputs I _O = 4.0 mA I _O = 8.0 mA					
			2.0	–	0	0.1	V
			3.0	–	0	0.1	V
			4.5	–	0	0.1	V
			3.0	–	–	0.36	V
			4.5	–	–	0.36	V
I _{LI}	input leakage current	V _I = V _{CC} or GND	5.5	–	–	0.1	μA
I _{OZ}	3-state output OFF current	V _I = V _{IH} or V _{IL} ; V _O = V _{CC} or GND	5.5	–	–	±0.25	μA
I _{CC}	quiescent supply current	V _I = V _{CC} or GND; I _O = 0 A	5.5	–	–	2.0	μA
C _I	input capacitance		–	–	3	10	pF

Quad 2-input OR gate

74AHC32; 74AHCT32

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT		
		OTHER	V _{CC} (V)						
T _{amb} = −40 °C to +85 °C									
V _{IH}	HIGH-level input voltage		2.0	1.5	–	–	V		
			3.0	2.1	–	–	V		
			5.5	3.85	–	–	V		
V _{IL}	LOW-level input voltage		2.0	–	–	0.5	V		
			3.0	–	–	0.9	V		
			5.5	–	–	1.65	V		
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL}							
		I _O = −50 μA; all outputs	2.0	1.9	–	–	V		
		I _O = −50 μA; all outputs	3.0	2.9	–	–	V		
		I _O = −50 μA; all outputs	4.5	4.4	–	–	V		
		I _O = −4.0 mA	3.0	2.48	–	–	V		
V _{OL}	LOW-level output voltage	I _O = −8.0 mA	4.5	3.8	–	–	V		
		V _I = V _{IH} or V _{IL}							
		I _O = 50 μA; all outputs	2.0	–	–	0.1	V		
		I _O = 50 μA; all outputs	3.0	–	–	0.1	V		
		I _O = 50 μA; all outputs	4.5	–	–	0.1	V		
I _{LI}	input leakage current	I _O = 4.0 mA	3.0	–	–	0.44	V		
		I _O = 8.0 mA	4.5	–	–	0.44	V		
		V _I = V _{CC} or GND	5.5	–	–	1.0	μA		
		I _{OZ}	3-state output OFF current	V _I = V _{IH} or V _{IL} ; V _O = V _{CC} or GND	5.5	–	–	±2.5	μA
		I _{CC}	quiescent supply current	V _I = V _{CC} or GND; I _O = 0 A	5.5	–	–	20	μA
C _I	input capacitance		–	–	–	10	pF		

Quad 2-input OR gate

74AHC32; 74AHCT32

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT		
		OTHER	V _{CC} (V)						
T _{amb} = −40 °C to +125 °C									
V _{IH}	HIGH-level input voltage		2.0	1.5	–	–	V		
			3.0	2.1	–	–	V		
			5.5	3.85	–	–	V		
V _{IL}	LOW-level input voltage		2.0	–	–	0.5	V		
			3.0	–	–	0.9	V		
			5.5	–	–	1.65	V		
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL}							
		I _O = −50 μA; all outputs	2.0	1.9	–	–	V		
		I _O = −50 μA; all outputs	3.0	2.9	–	–	V		
		I _O = −50 μA; all outputs	4.5	4.4	–	–	V		
		I _O = −4.0 mA	3.0	2.40	–	–	V		
V _{OL}	LOW-level output voltage	I _O = −8.0 mA	4.5	3.70	–	–	V		
		V _I = V _{IH} or V _{IL}							
		I _O = 50 μA; all outputs	2.0	–	–	0.1	V		
		I _O = 50 μA; all outputs	3.0	–	–	0.1	V		
		I _O = 50 μA; all outputs	4.5	–	–	0.1	V		
I _{LI}	input leakage current	I _O = 4.0 mA	3.0	–	–	0.55	V		
		I _O = 8.0 mA	4.5	–	–	0.55	V		
		V _I = V _{CC} or GND	5.5	–	–	2.0	μA		
		I _{OZ}	3-state output OFF current	V _I = V _{IH} or V _{IL} ; V _O = V _{CC} or GND	5.5	–	–	±10.0	μA
		I _{CC}	quiescent supply current	V _I = V _{CC} or GND; I _O = 0 A	5.5	–	–	40	μA
C _I	input capacitance		–	–	–	10	pF		

Quad 2-input OR gate

74AHC32; 74AHCT32

Type 74AHCT32

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		OTHER	V _{CC} (V)				
T _{amb} = 25 °C							
V _{IH}	HIGH-level input voltage		4.5 to 5.5	2.0	–	–	V
V _{IL}	LOW-level input voltage		4.5 to 5.5	–	–	0.8	V
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL}					
		I _O = –50 μA; all outputs	4.5	4.4	4.5	–	V
		I _O = –8.0 mA	4.5	3.94	–	–	V
V _{OL}	LOW-level output voltage	V _I = V _{IH} or V _{IL}					
		I _O = 50 μA; all outputs	4.5	–	0	0.1	V
		I _O = 8.0 mA	4.5	–	–	0.36	V
I _{LI}	input leakage current	V _I = V _{IH} or V _{IL}	5.5	–	–	0.1	μA
I _{OZ}	3-state output OFF current	V _I = V _{IH} or V _{IL} ; V _O = V _{CC} or GND per input pin; other inputs at V _{CC} or GND; I _O = 0 A	5.5	–	–	±0.25	μA
I _{CC}	quiescent supply current	V _I = V _{CC} or GND; I _O = 0 A	5.5	–	–	2.0	μA
ΔI _{CC}	additional quiescent supply current per input pin	V _I = V _{CC} – 2.1 V other inputs at V _{CC} or GND; I _O = 0 A	4.5 to 5.5	–	–	1.35	mA
C _I	input capacitance		–	–	3	10	pF
T _{amb} = –40 °C to +85 °C							
V _{IH}	HIGH-level input voltage		4.5 to 5.5	2.0	–	–	V
V _{IL}	LOW-level input voltage		4.5 to 5.5	–	–	0.8	V
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL}					
		I _O = –50 μA; all outputs	4.5	4.4	–	–	V
		I _O = –8.0 mA	4.5	3.8	–	–	V
V _{OL}	LOW-level output voltage	V _I = V _{IH} or V _{IL}					
		I _O = 50 μA; all outputs	4.5	–	–	0.1	V
		I _O = 8.0 mA	4.5	–	–	0.44	V
I _{LI}	input leakage current	V _I = V _{IH} or V _{IL}	5.5	–	–	1.0	μA
I _{OZ}	3-state output OFF current	V _I = V _{IH} or V _{IL} ; V _O = V _{CC} or GND per input pin; other inputs at V _{CC} or GND; I _O = 0 A	5.5	–	–	±2.5	μA
I _{CC}	quiescent supply current	V _I = V _{CC} or GND; I _O = 0 A	5.5	–	–	20	μA
ΔI _{CC}	additional quiescent supply current per input pin	V _I = V _{CC} – 2.1 V other inputs at V _{CC} or GND; I _O = 0 A	4.5 to 5.5	–	–	1.5	mA
C _I	input capacitance		–	–	–	10	pF

Quad 2-input OR gate

74AHC32; 74AHCT32

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		OTHER	V _{CC} (V)				
T _{amb} = −40 °C to +125 °C							
V _{IH}	HIGH-level input voltage		4.5 to 5.5	2.0	–	–	V
V _{IL}	LOW-level input voltage		4.5 to 5.5	–	–	0.8	V
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL}					
		I _O = −50 μA; all outputs	4.5	4.4	–	–	V
		I _O = −8.0 mA	4.5	3.70	–	–	V
V _{OL}	LOW-level output voltage	V _I = V _{IH} or V _{IL}					
		I _O = 50 μA; all outputs	4.5	–	–	0.1	V
		I _O = 8.0 mA	4.5	–	–	0.55	V
I _{LI}	input leakage current	V _I = V _{IH} or V _{IL}	5.5	–	–	2.0	μA
I _{OZ}	3-state output OFF current	V _I = V _{IH} or V _{IL} ; V _O = V _{CC} or GND per input pin; other inputs at V _{CC} or GND; I _O = 0 A	5.5	–	–	±10.0	μA
I _{CC}	quiescent supply current	V _I = V _{CC} or GND; I _O = 0 A	5.5	–	–	40	μA
ΔI _{CC}	additional quiescent supply current per input pin	V _I = V _{CC} − 2.1 V other inputs at V _{CC} or GND; I _O = 0 A	4.5 to 5.5	–	–	1.5	mA
C _I	input capacitance		–	–	–	10	pF

Quad 2-input OR gate

74AHC32; 74AHCT32

AC CHARACTERISTICS

Type 74AHC32

GND = 0 V; $t_r = t_f \leq 3.0$ ns; see Fig.7.

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		WAVEFORMS	C _L				
T _{amb} = 25 °C							
V _{CC} = 3.0 V to 3.6 V; note 1							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	–	3.9	7.9	ns
			50 pF	–	5.6	11.4	ns
V _{CC} = 4.5 V to 5.5 V; note 2							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	–	2.8	5.5	ns
			50 pF	–	4.1	7.5	ns
T _{amb} = –40 °C to +85 °C							
V _{CC} = 3.0 V to 3.6 V							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	1.0	–	9.5	ns
			50 pF	1.0	–	13	ns
V _{CC} = 4.5 V to 5.5 V							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	1.0	–	6.5	ns
			50 pF	1.0	–	8.5	ns
T _{amb} = –40 °C to +125 °C							
V _{CC} = 3.0 V to 3.6 V							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	1.0	–	10.0	ns
			50 pF	1.0	–	14.5	ns
V _{CC} = 4.5 V to 5.5 V							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	1.0	–	7.0	ns
			50 pF	1.0	–	9.5	ns

Notes

1. Typical values are measured at $V_{CC} = 3.3\text{ V}$.
2. Typical values are measured at $V_{CC} = 5.0\text{ V}$.

Quad 2-input OR gate

74AHC32; 74AHCT32

Type 74AHCT32GND = 0 V; $t_r = t_f \leq 3.0$ ns; see Fig.7.

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		WAVEFORMS	C _L				
T _{amb} = 25 °C							
V _{CC} = 4.5 V to 5.5 V; note 1							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	–	3.1	6.9	ns
			50 pF	–	4.3	7.9	ns
T _{amb} = –40 °C to +85 °C							
V _{CC} = 4.5 V to 5.5 V							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	1.0	–	8.0	ns
			50 pF	1.0	–	9.0	ns
T _{amb} = –40 °C to +125 °C							
V _{CC} = 4.5 V to 5.5 V							
t _{PHL} /t _{PLH}	propagation delay nA, nB to nY	see Fig.6	15 pF	1.0	–	9.0	ns
			50 pF	1.0	–	10.0	ns


Note

1. Typical values are measured at $V_{CC} = 5.0\text{ V}$.

Quad 2-input OR gate


74AHC32; 74AHCT32

AC WAVEFORMS

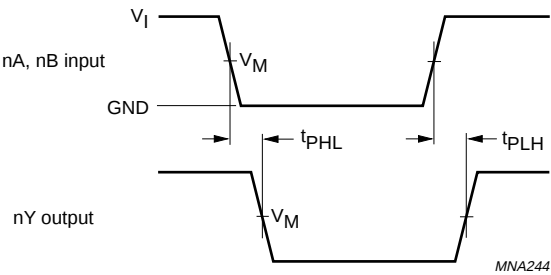

FAMILY	V _I INPUT REQUIREMENTS	V _M INPUT	V _M OUTPUT
AHC	GND to V _{CC}	0.5 × V _{CC}	0.5 × V _{CC}
AHCT	GND to 3.0 V	1.5 V	0.5 × V _{CC}

Fig.6 The input (nA, nB) to output (nY) propagation delays.

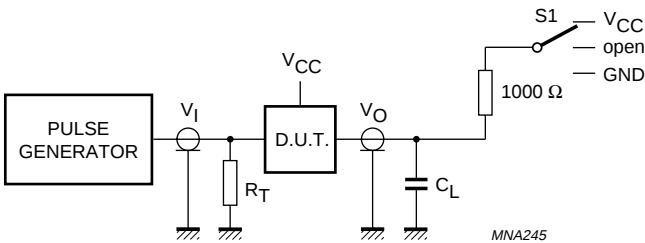

TEST	S1
t _{PLH} /t _{PHL}	open
t _{PLZ} /t _{PZL}	V _{CC}
t _{PHZ} /t _{PZH}	GND

Definitions for test circuit:
C_L = load capacitance including jig and probe capacitance.
R_T = termination resistance should be equal to the output impedance Z_o of the pulse generator.

Fig.7 Load circuitry for switching times.


Quad 2-input OR gate

74AHC32; 74AHCT32

PACKAGE OUTLINES

SO14: plastic small outline package; 14 leads; body width 3.9 mm

SOT108-1

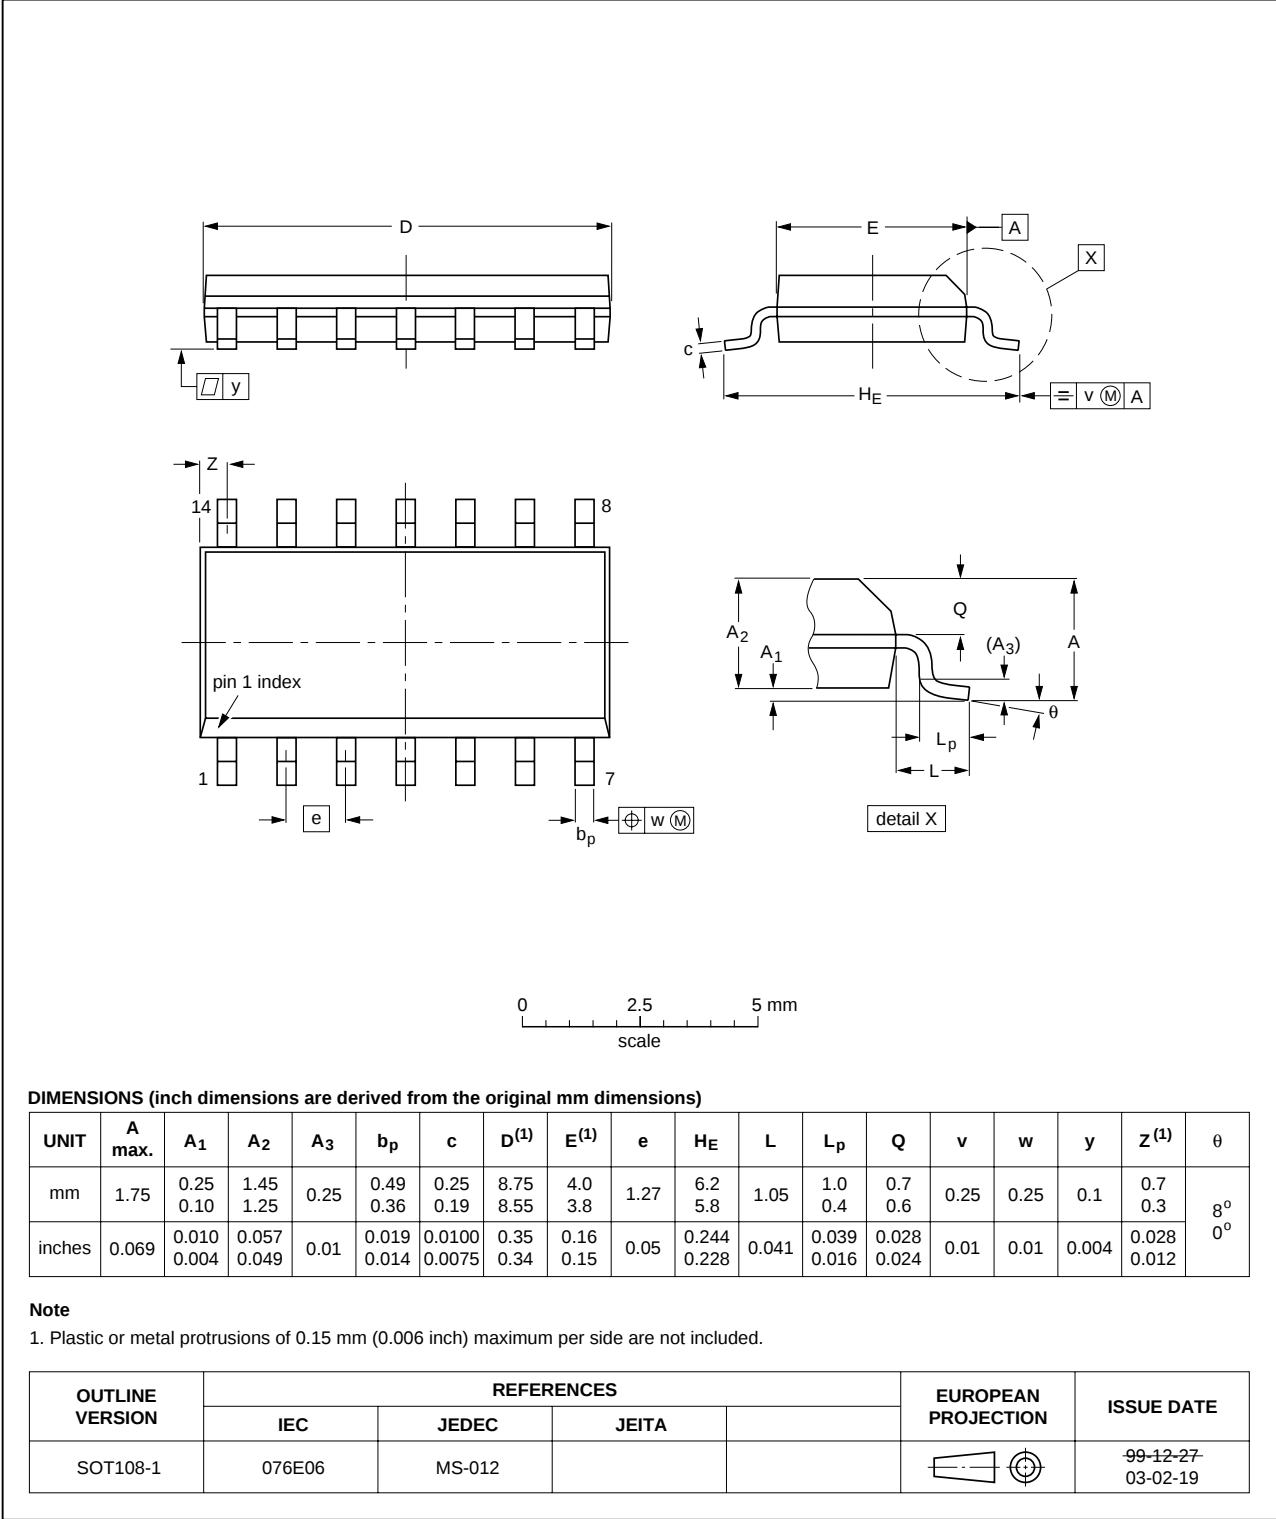


Quad 2-input OR gate

74AHC32; 74AHCT32

TSSOP14: plastic thin shrink small outline package; 14 leads; body width 4.4 mm

SOT402-1

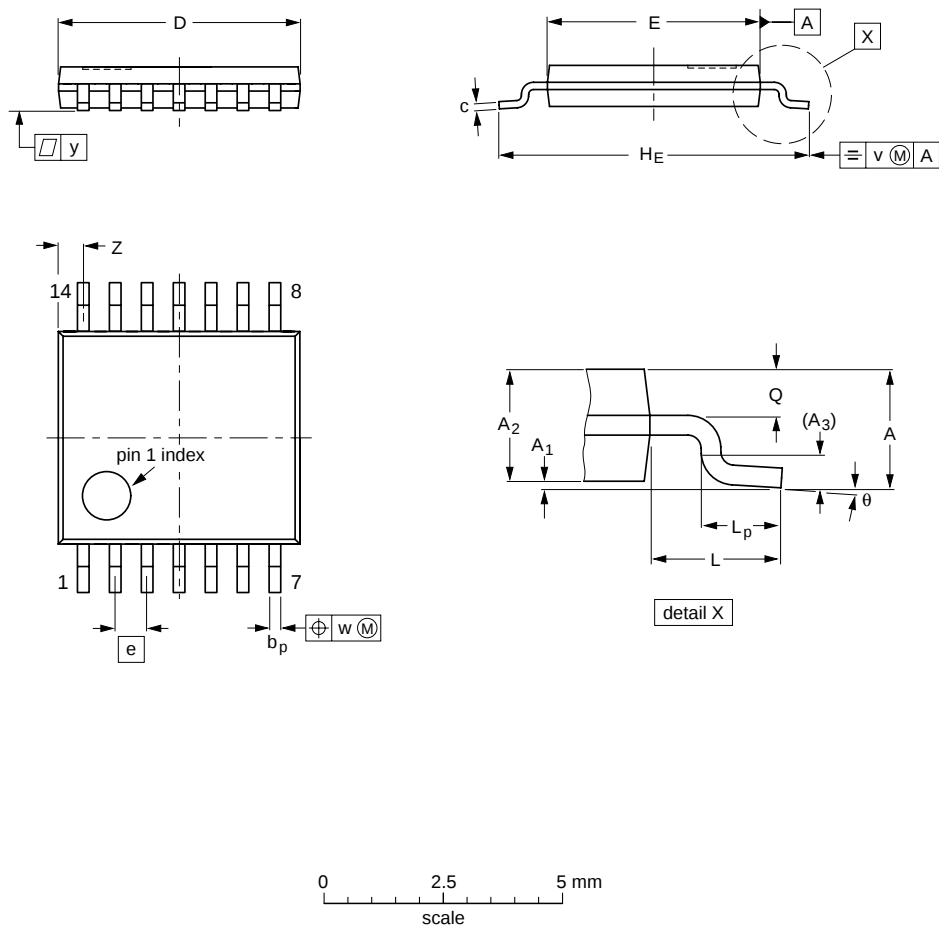

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽²⁾	e	H _E	L	L _p	Q	v	w	y	z ⁽¹⁾	θ
mm	1.1	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	5.1 4.9	4.5 4.3	0.65	6.6 6.2	1	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.72 0.38	8° 0°

Notes


- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT402-1		MO-153				99-12-27 03-02-18

Quad 2-input OR gate

74AHC32; 74AHCT32

DHVQFN14: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads;
14 terminals; body 2.5 x 3 x 0.85 mm SOT762-1

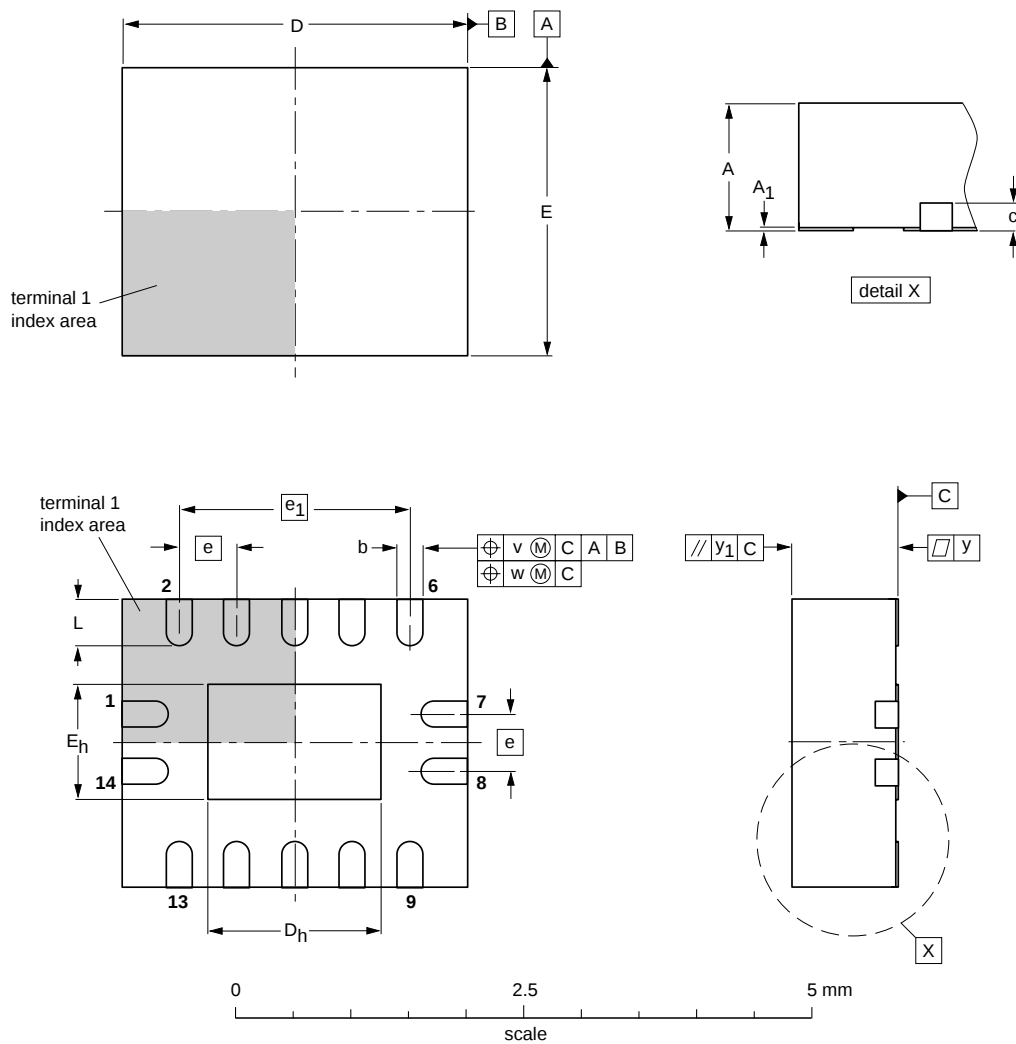

DIMENSIONS (mm are the original dimensions)

UNIT	A ⁽¹⁾ max.	A ₁	b	c	D ⁽¹⁾	D _h	E ⁽¹⁾	E _h	e	e ₁	L	v	w	y	y ₁
mm	1	0.05 0.00	0.30 0.18	0.2	3.1 2.9	1.65 1.35	2.6 2.4	1.15 0.85	0.5	2	0.5 0.3	0.1	0.05	0.05	0.1

Note
1. Plastic or metal protrusions of 0.075 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT762-1	---	MO-241	---			02-10-17 03-01-27

Quad 2-input OR gate

74AHC32; 74AHCT32

DATA SHEET STATUS

LEVEL	DATA SHEET STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾⁽³⁾	DEFINITION
I	Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
II	Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
III	Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN).

Notes

1. Please consult the most recently issued data sheet before initiating or completing a design.
2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.
3. For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

DEFINITIONS

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

DISCLAIMERS

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors – a worldwide company

Contact information

For additional information please visit **<http://www.semiconductors.philips.com>**. Fax: **+31 40 27 24825**

For sales offices addresses send e-mail to: **sales.addresses@www.semiconductors.philips.com**.

© Koninklijke Philips Electronics N.V. 2004

SCA76

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

R44/03/pp18

Date of release: 2004 May 19

Document order number: 9397 750 13221

Let's make things better.

**Philips
Semiconductors**



PHILIPS