


Specifications:

Current Rating:7.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1,000m ohm. Min.
 Withstanding Voltage:1,500V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material and Finish:


Insulator:Nylon66 (UL94V-2)
 Insulator Color:Transparent White
 Contact :Brass
 Plating:Tin Plated

How To Order
 2219S-XX-01

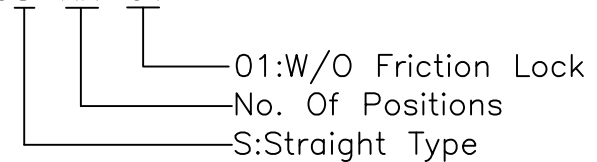

Dimension:

Pos	Dim. A	Dim. B	Pos	Dim. A	Dim. B	Pos	Dim. A	Dim. B
2	3.96	8.03	9	31.68	35.75	16	59.40	63.47
3	7.92	11.99	10	35.64	39.71	17	63.36	67.43
4	11.88	15.95	11	39.60	43.67	18	67.32	71.39
5	15.84	19.91	12	43.56	47.63	19	71.28	75.35
6	19.80	23.87	13	47.52	51.59	20	75.24	79.31
7	23.76	27.83	14	51.48	55.55			
8	27.72	31.79	15	55.44	59.51			

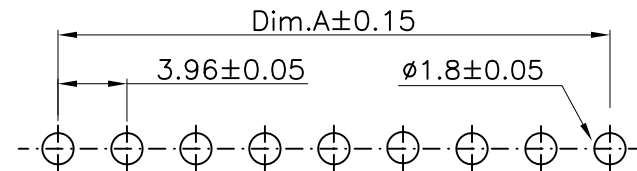

P.C.B. Layout

RoHS Compliant

				DRAWN: Cel king	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
D				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: 3.96mm Wire to Board Wafer Straight Type
C					SCALE:		A4
B				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 2219S-XX-01	
REV	DATE	FILE	BY		PROJECTION:		