



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

2SC2001
2SC2001-M
2SC2001-L
2SC2001-K

Features

- Capable of 0.6Watts of Power Dissipation.
- Collector-current 0.7A
- Collector-base Voltage 30V
- Operating and storage junction temperature range: -55°C to +150°C
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking: C2001

NPN Silicon
Plastic-Encapsulate
Transistor

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
OFF CHARACTERISTICS				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=10\text{mAdc}$, $I_B=0$)	25	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=100\mu\text{Adc}$, $I_E=0$)	30	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=100\mu\text{Adc}$, $I_C=0$)	5.0	---	Adc
I_{CBO}	Collector Cutoff Current ($V_{CB}=30\text{Vdc}$, $I_E=0$)	---	0.1	μAdc
I_{CEO}	Collector Cutoff Current ($V_{CE}=20\text{Vdc}$, $I_E=0$)	---	0.1	Vdc
I_{EBO}	Emitter Cutoff Current ($V_{EB}=5.0\text{Vdc}$, $I_C=0$)	---	0.1	μAdc


ON CHARACTERISTICS

h_{FE}	DC Current Gain ($I_C=100\text{mAdc}$, $V_{CE}=1.0\text{Vdc}$)	90	400	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=700\text{mAdc}$, $I_B=70\text{mAdc}$)	---	0.6	Vdc
$V_{(BE)sat}$	Base-Emitter Saturation Voltage ($I_C=700\text{mAdc}$, $I_B=70\text{mAdc}$)	---	1.2	Vdc
fT	Transition Frequency ($V_{CE}=6.0\text{Vdc}$, $I_C=10\text{mAdc}$, f=30MHz)	50	---	MHz

CLASSIFICATION OF h_{FE}

Rank	M	L	K
Range	90-180	135-270	200-400

TO-92

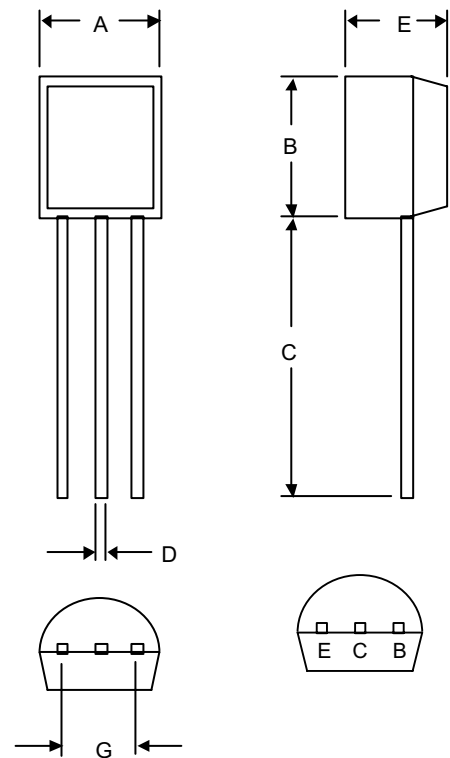

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.170	.190	4.33	4.83	
B	.170	.190	4.30	4.83	
C	.550	.590	13.97	14.97	
D	.010	.020	0.36	0.56	
E	.130	.160	3.30	3.96	
G	.010	.104	2.44	2.64	



TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.