
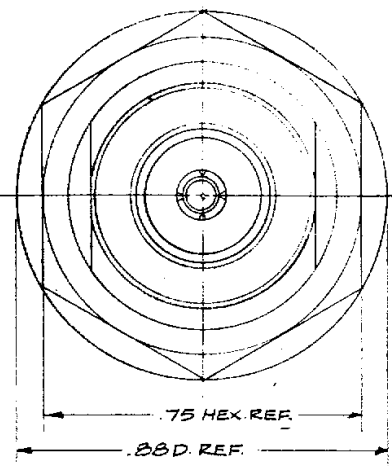



DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

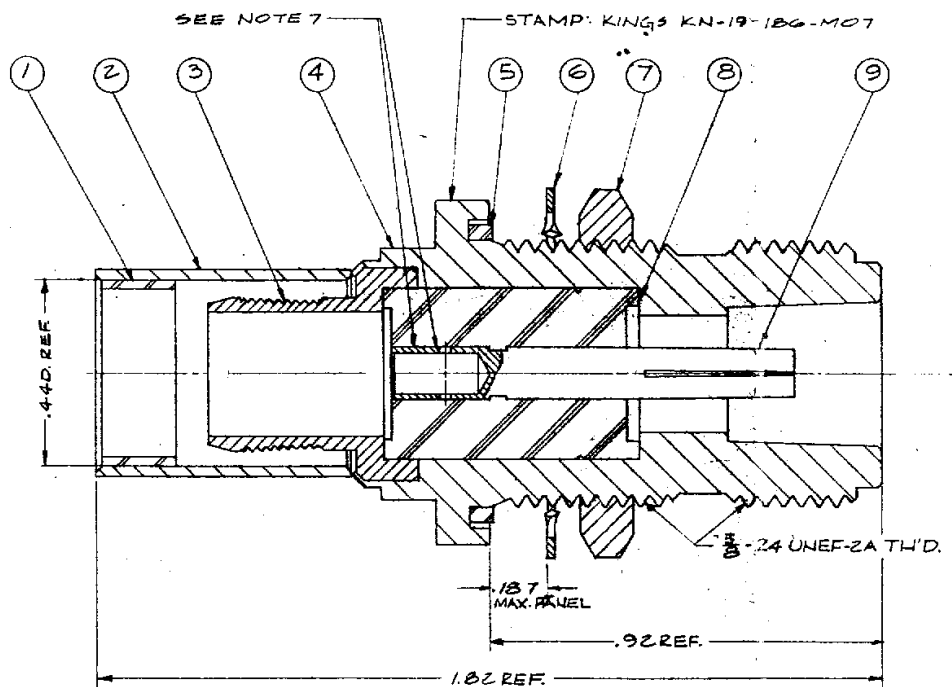

NOTES:

1. FOR USE WITH RG-9, 9A, 9B, 214, 225, 393/U CABLE.
2. FOR CABLE TRIMMING SEE KTI-137 & KTD-13B.
3. FOR FORMING USE CRIMP DIE SIZE 04.
4. FOR CABLING INSTRUCTIONS SEE CP-480.

6. ITEM ① TO BE USED ON RG-393/U ONLY. OMIT WHEN USING RG-9, 214 & 225/U CABLE.
7. APPLY TWO BANDS OF RED DIE MAKERS INK.
8. ITEM ⑨ TO BE SUPPLIED UNASSEMBLED.

UNLESS OTHERWISE SPECIFIED:

- | | |
|--|--|
| 1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010 | 2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. |
| 3 PLACE DECIMALS ± .004 | 3. NO FILLETS PERMITTED. |
| 7. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES. | 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX. |
| | 5. ALL DIMENSIONS PRIOR TO PLATING. |

KN-19-186-M07
SHEET 1 OF 2
S-D

REVISIONS	
ISSUE	CHANGES
0	ER 17772 NM 31 OCT 77
1	CN 33220 C WJM. 20 AUG 91

SCALE: 4:1 S-D

USED ON: MCAIR
STSM1544-0001
REF:

FINISH
SPEC. KER 10004
MATL.
SPEC.

N BULK HEAD JACK

DRAWN NM DATE 26 OCT 77
APPR. JF DATE 1-3-77

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

KN-19-186-M07

(SHEET 1 OF 2) C.D.

ITEM	REQ'D	DESCRIPTION	PART NO.