
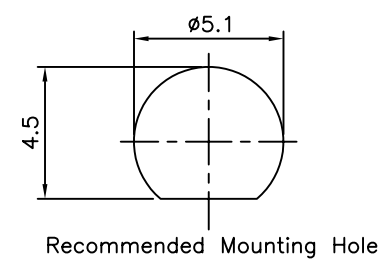
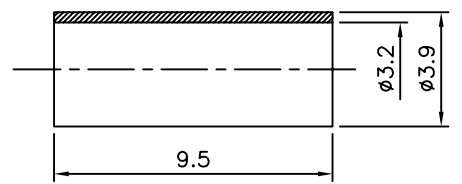
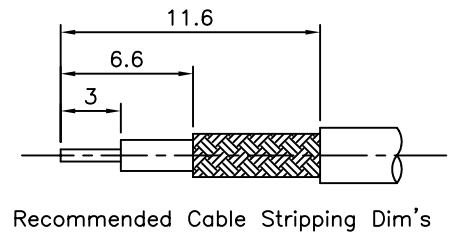


SPECIFICATIONS

- 1.Crimped Perrule
HEX Crimp Size 3.25mm
- 2.Contact Pin To Solder
- 3.Max Panel Thickness=3mm

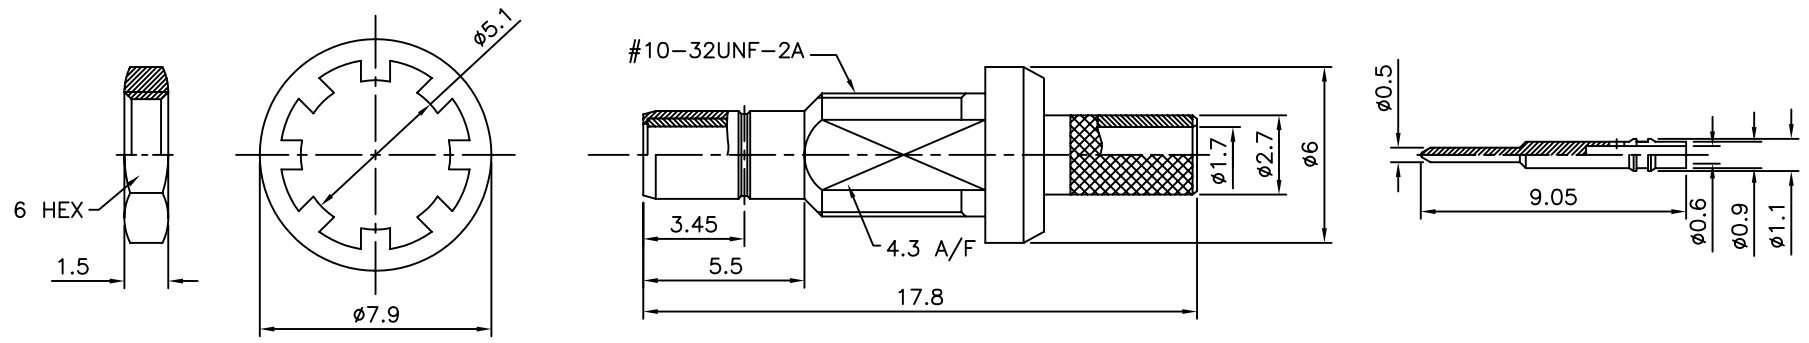

Notes: Finish (Plating Thickness In Micro-Inches)

- 1.Brass PER QQ-B-626
- 2.Gold PL 3 Min Over Nickel PL 70 Min Thick Over Copper Stricke
- 3.Gold PL 30 Min Over Nickel PL 70 Min Thick Over Copper Stricke
- 4.Teflon MIL-P-19468
- 5.Brass PER QQ-B-613
- 6.Brass JIS H 3250 C 2700

Description	Material	Finish
Ferrule	Note 6	Note 2
NUT	Note 5	Note 2
Washer	Note 1	Note 2
Contact Pin	Note 1	Note 3
Braid Holder	Note 1	Note 2
Insulator	Note 4	White
Insulator	Note 4	White
Body	Note 1	Note 2

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 0.5~6 ±0.2 >6~30 ±0.4 >30~120 ±0.6 >120~315 ±1 >315~1000 ±1.6 ANG ±3°
PART No. SMB-JS17450	MEI CHECKED BY HZF	
DRAWING No. SMB-JS17450	DRAWING BY PEGA	
SCALE NONE	REV. AO	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
AO		NEW RELEASE	HZF	04/24/2006
		REVISIONS		