


SD

2-1912

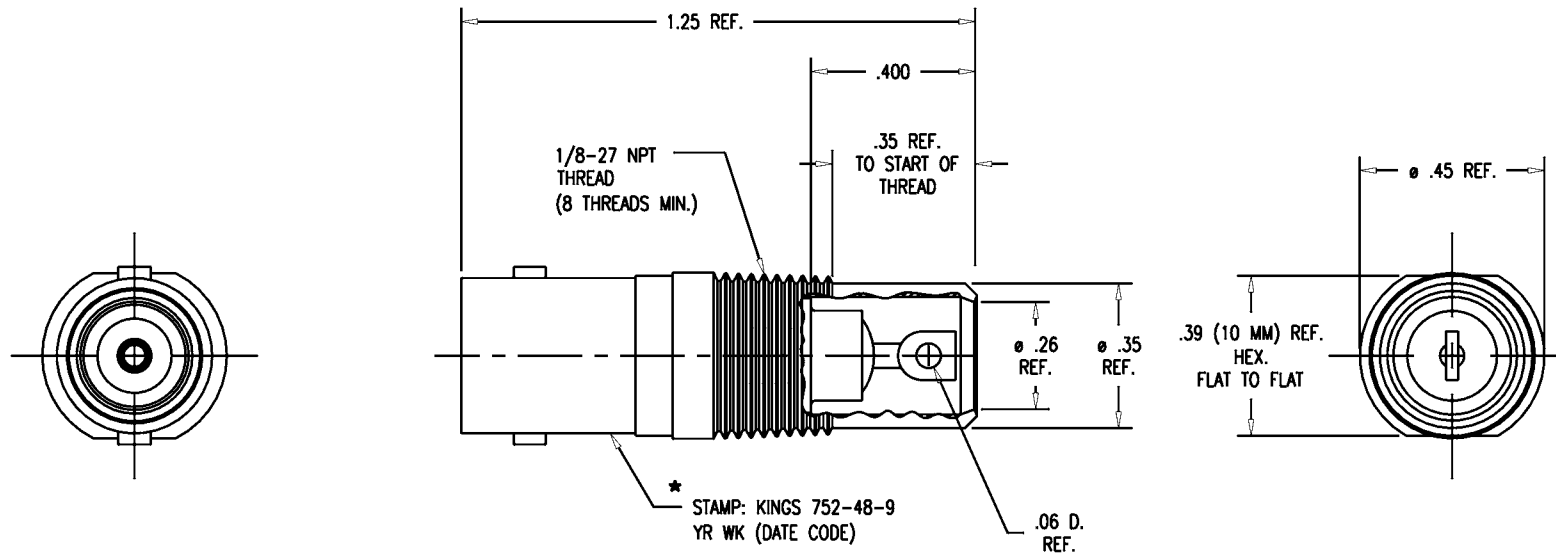

NOTES:

- INTERFACE PER MIL-STD-348, FIG. 301-2.
- MARK PACKAGE: KINGS 752-48-9
YR WK (DATE CODE)
- MATERIALS:
INSULATOR : TEFLON, ASTM-D-4894
BODY AND RETAINING RING : BRASS, ASTM-B-16
SEAL CONTACT AND OUTER RING : KOVAR
GLASS SEAL : #AB-60W-SP
- FINISHES:
CONTACT : GOLD PLATED PER ASTM-B488
SEALED CONTACT : TIN PLATED
ALL OTHER PARTS : NICKEL PLATED PER QQ-N-290
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE : 50 OHMS
WORKING VOLTAGE : 500 VRMS
FREQUENCY RANGE : DC TO 4 GHz
- ENVIRONMENTAL:
LEAKAGE RATE SHALL NOT EXCEED 1×10^{-5} cc/sec OF
TRACER GAS AT ATMOSPHERIC PRESSURE.
TEMPERATURE LIMITS: -50° C TO 260° C

REVISIONS

ISSUE	CHANGES
0	ER 39321 DCT 9/1/5

SCALE 3 : 1

APPROX SURFACE AREA

WAS 752-48-9

USED ON

REF: EQR 570 & E-20156

BNC, BULKHEAD JACK
HERMETIC SEALED

DRAWN J. KENNEDY DATE 01/10/03

DESIGN J. KENNEDY DATE 01/10/03

APPR. DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

2-1912

SD