

REV.	DATE	DESCRIPTION	BY	C.K.D.

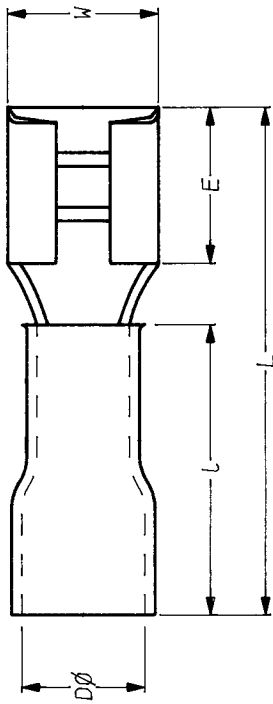


FIG. 1

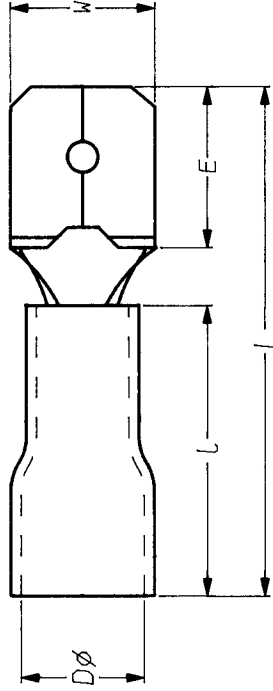


FIG. 2

BURNDY CATALOG NO.	ACCOMMODATES WIRE RANGE	TAB SIZE	FIG. NO.	Dø	E	L MAX	L	W	DESCRIPTION
Q18F187D	22-16	.187x.020	1	.140	.24	.68	.32	.197	UNINSULATED FEMALE DISCONNECT WITH METAL SLEEVE.
Q18F250D	22-16	.250x.032		.140	.31	.75	.32	.260	
Q14F187D	16-14	.187x.020		.160	.24	.68	.32	.197	
Q14F250D	16-14	.250x.032		.145	.31	.75	.32	.260	
Q10F250D	12-10	.250x.032	2	.240	.31	.88	.45	.260	UNINSULATED MALE DISCONNECT WITH METAL SLEEVE.
Q18M250D	22-16	.250x.032		.140	.32	.78	.32	.248	
Q14M187D	16-14	.187x.020		.160	.23	.82	.32	.187	
Q14M250D	16-14	.250x.032		.145	.32	.78	.32	.248	
Q10M250D	12-10	.250x.032		.240	.32	.96	.24	.248	

NOTES:

MATERIAL: BRASS

FINISH: TIN PLATED

INSTALLATION TOOLS: BURNDY CATALOG NUMBER Y8MRB OR EQUIVALENT.

CAD FILE: SC205910-SHT01

UNINSULATED DISCONNECT TERMINALS	
CAT. NO. Q.F.D. Q.M.D. (SEE TABLE)	SCALE
DRAWN JEL 2/16/90	CHECKED K.H. 2/16/90
DES. APPROV. J.M.M. 2/22/90	NFG APPROV.
Q.C. APPROV. J.P.R. 2/26/90	DRAWING NO. SC205910
	REV 0
BURNDY U.S. ELECTRICAL GROUP MANCHESTER, NH 03103	
D.O. 51641	SHT 1 OF 1