
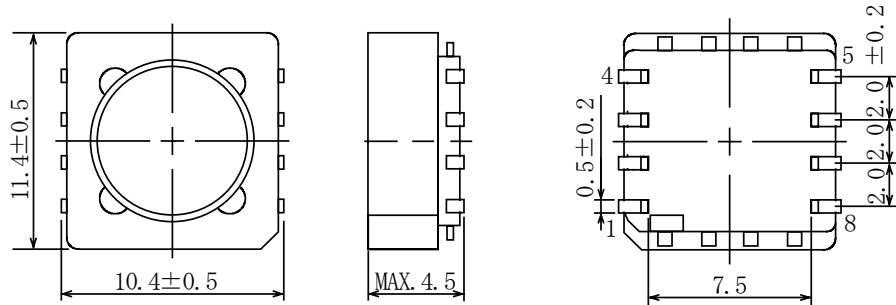



Type: CLQ104B
◆ Product Description


- 11.9×10.9mm Max.(L×W), 4.5mmMax. Height.
- In addition to the typical versions of parameters shown here, custom parameters are available to meet your exact requirements.


◆ Feature

- Magnetically shielded construction.
- Max. Operating frequency 500kHz,Max. Operating Power 3.0W(500kHz).
Max. Operating Power 2.0W(300kHz), 800mW(100kHz).
- Ideally used in car audio device.
- RoHS Compliance

◆ Dimensions (mm)

◆ Schematics (Bottom)


“S” indicates winding start.

◆ Land Pattern

◆ Specification

Sample No.	Inductance (1-4) 1kHz/1V	D.C.R. (1-4) Max.	Leakage Inductance(1,2-3,4) (400kHz/0.1V)
A415-YMC-001	37.0 μ H \pm 25%	310m Ω	2.0 μ H Max.